

# Mountain bicycle - S1000D Issue 3.0

S1000DBIKE-X1234-00030-00

Issue No. 002(00), 2023-02-01

Copyright (c) 2023 Docuneering Ltd.

Government License - X1234 001

To be made available to all S1000D users.

Export of this data module to all countries that are the residence of organizations that are users of S1000D is permitted. Storage of this data module is to be at the discretion of the organization.

**UNCLASSIFIED** 

There are no specific handling instructions for this data module.

Users may destroy this data module in accordance with their own local procedures.

There are no dissemination limitations that apply to this data module.

## Responsible partner company

Docuneering Ltd. X1234





## Configuration

## 1 Product configuration

The product configuration shows current, associated, and historical product information for the end item part numbers contained in this publication. The products are listed byb PN class, which are defined as follows:

- "PRIME" The PRIME is the current OEM's top-level part number and MFR code covered by this publication.
- "ALT" The ALT represents an alternative to the PRIME for the same part. For example, this could be an airframe manufacturer's part number.
- "PREV" The PREV represents a legacy part number and MFR code to the PRIME for the same part number that may still be supported.
- "OBS" The OBS represents a part number and MFR code that is no longer supported but is included in this publication for historical reference.

Refer to the "List of suppliers" for MFR information.

Table 1 Product configuration

PN class	PN	MFR	Component name	Model
PRIME	123-1111	ZZZZZ	Product Five	
ALT	Z555-ZZZZ-55	ZZZZZ	Product Five	
ALT	R555-RRRR-55	RRRR	Product Five	
PREV	A555-5555-55	AAAAA		Model Five

## 2 Publication configuration

The publication configuration shows active or superseded configuration information about this publication. The publications are listed by Pub class, which are defined as follows:

- "PRIME" The PRIME represents the active publication.
- "PREV" The PREV represents the legacy publication to the PRIME publication.

Refer to the "List of suppliers" for MFR information.

Table 2 Publication configuration

Pub class	SNS/ATA	MFR	Publication number	Issue/Rev
PRIME	23-10-10	55555	CMMST-ZZZZZ-00001-00	Current
PREV	23-00-10	ZZZZZ		018





## Copyright statements

#### 1 Copyright

Copyright (C) 2022 by DOCUNEERING LTD

#### 2 Limitations of liability

This material is provided "As is" and neither Docuneering Ltd nor any person who has contributed to the creation, revision or maintenance of the material makes any representations or warranties, express or implied, including but not limited to, warranties of marchantability or fitness for any particular purpose.

Neither Docuneering Ltd nor any person who has contributed to the creation, revision or maintenance of this material shall be liable for any direct, indirect, special or consequential damages or any other liability arising from any use of this material.

Revisions to this document may occur after its issuance. The user is responsible for determining if revisions to the material contained in this document have occurred and are applicable.





### Administrative and legal statements

## 1 Documeering Limited Product License Agreement

IMPORTANT - PLEASE READ THIS ENTIRE AGREEMENT CAREFULLY BEFORE USING THIS DOCUMENT.

YOU AGREE TO BE BOUND BY THE TERMS OF, AND BECOME PARTY TO, THIS AGREEMENT. THIS AGREEMENT IS APPLICABLE TO THE ACCOMPANYING MARCHANDISE (THE "MERCHANDISE"), THE INFORMATION RESIDING THEREON OR ON THE INTERNET WEB SITES ACCESSIBLE EXCLUSIVELY VIA LINKS FROM THE MERCHANDISE (THE "CONTENT") AND THE RELATED SOFTWARE (COLLECTIVELY, THE "LICENSED PRODUCT"). IF YOU DO NOT AGREE TO BE BOUND BY THE TERMS OF, AND BECOME PARTY TO, THIS AGREEMENT, YOU CANNOT USE ANY PART OF THIS DOCUMENT AND CANNOT SHARE IT WITH OR FORWARD IT TO ANY OTHER PERSON OR ENTITY.

## 2 Important information

The Product contains specifications, practices and other information relating to the covered topics. Docuneering Ltd does not mandate the use of all or any part of the Licensed Product and your decision to use the Licensed Product is entirely voluntary, your decision and at your own risk. You may choose to use the Content is whole, in part or not at all.

There may be practices, standards and/or governmental requirements applicable to your operations that exceed, or vary from, the Licensed Product. You are solely responsible for determining of such practices, standards of regulatory requirements exist and whether they apply to your activities and for complying with these that are applicable. Such practices, standards and regulatory requirements can change significantly over time. Unless Docuneering Ltd expressly states otherwise in writing, nothing in this Agreement shall be interpreted as requiring Docuneering Ltd to provide you with updates, revisions or information about any development or action affecting the Licensed Product.

The Licensed Product has been compiled by Docuneering Ltd and/or its licensors. Docuneering Ltd and/or its licensors reserve title to and ownership of the Licensed Product and all copyrights and any other intellectual rights in it.

## 3 Description of license

Upon your acceptance of this Agreement, you will be permitted to access the information for which you have obtained the license described and limited below...





### Safety statements

## 1 Safety statements

#### **WARNING**

The removal of the tire with the tire inflated is dangerous. Make sure the tire is fully deflated before you remove the tire.

#### **WARNING**

This is another warning.

#### **CAUTION**

You must keep the roller bearing with the related wheel. The roller bearings are not interchangable.

#### **CAUTION**

This is another caution.

#### **NOTE**

This is a note.

#### **NOTE**

This is another note.





## List of effective data modules

The listed documents are included in issue 002, dated 2023-02-01, of this publication.

C = Changed data module

N = New data module

Document title	Data module code Publication module code	Issue date	No. of pages	Applicable to
Title page	S1000DBIKE-AAA-D00-00-00- 00AA-001A-A	2022-12-31	1	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Configuration	\$1000DBIKE-AAA-D00-00-00- 00AA-020A-A	2022-12-31	1	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Copyright statements	S1000DBIKE-AAA-D00-00-00- 00AA-021A-A	2022-12-31	1	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Administrative and legal statements	\$1000DBIKE-AAA-D00-00-00- 00AA-023A-A	2022-12-31	1	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Safety statements	S1000DBIKE-AAA-D00-00-00- 00AA-012A-A	2022-12-31	1	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)



	(Continued)				
Document title	Data module code Publication module code		Issue date	No. of pages	Applicable to
Change record	\$1000DBIKE-AAA-D00-00-00- 00AA-00TA-A	С	2022-12-31	1	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Technical standard record	\$1000DBIKE-AAA-D00-00-00- 00AA-008A-A		2022-12-31	1	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Products cross-reference table	\$1000DBIKE-AAA-D00-00-00- 00AA-00PA-D		2007-08-21	2	All
Conditions cross-reference table	\$1000DBIKE-AAA-D00-00-00- 00AA-00QA-D		2007-08-21	2	All
Applicability cross-reference table	\$1000DBIKE-AAA-D00-00-00- 00AA-00WA-D		2007-08-21	1	All
Introduction	\$1000DBIKE-AAA-D00-00-00- 00AA-018A-A		2022-12-31	1	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Section 1 – Mountain bicycle manual	\$1000DBIKE-AAA-D00-00-00- 01AA-001A-A		2022-12-31	1	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Mountain bicycle – Business rules	\$1000DBIKE-AAA-D00-00-00- 00AA-022A-D	С	2007-07-31	9	All
Bicycle – Description of how it is made	\$1000DBIKE-AAA-D00-00-00-00-00AA-041A-A	С	2007-07-31	3	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)



	(Continued)				_
Document title	Data module code Publication module code		Issue date	No. of pages	Applicable to
Bicycle – Description of function	\$1000DBIKE-AAA-D00-00-00- 00AA-042A-A	N	2007-07-31	3	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Bicycle – Description attributed to crew	S1000DBIKE-AAA-D00-00-00- 00AA-043A-A	С	2007-07-31	2	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Bicycle – Pre-operation procedures (crew)	\$1000DBIKE-AAA-D00-00-00- 00AA-121A-A	С	2007-07-31	6	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Bicycle – Normal operation procedures (crew)	S1000DBIKE-AAA-D00-00-00- 00AA-131A-A	С	2007-07-31	3	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Bicycle – Post-operation procedures (crew)	S1000DBIKE-AAA-D00-00-00- 00AA-151A-A	N	2007-07-31	3	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Bicycle – Other procedures to clean	S1000DBIKE-AAA-D00-00-00- 00AA-258A-A	С	2007-07-31	7	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)

	(Continued)				
Document title	Data module code Publication module code		Issue date	No. of pages	Applicable to
Bicycle – Place on test stand	S1000DBIKE-AAA-D00-00-00- 00AA-330A-A	С	2007-07-31	2	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Bicycle – Standard repair procedures	\$1000DBIKE-AAA-D00-00-00- 00AA-663A-A		2007-07-31	13	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Bicycle – Illustrated Parts Data - IPD	\$1000DBIKE-AAA-D00-00-00- 00AA-941A-D		2007-07-31	3	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Bicycle – Time limits	\$1000DBIKE-AAA-D05-10-00- 00AA-000A-A	С	2007-07-31	1	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Bicycle – Scheduled maintenance lists	\$1000DBIKE-AAA-D05-20-00- 00AA-000A-A		2007-07-31	11	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Bicycle – Scheduled maintenance checks	\$1000DBIKE-AAA-D05-40-00- 00AA-000A-A		2007-07-31	2	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)



	(Continued)				
Document title	Data module code Publication module code		Issue date	No. of pages	Applicable to
Wheel – Description of how it is made	\$1000DBIKE-AAA-DA0-00-00- 00AA-041A-A	С	2007-07-31	7	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Inner tube – Remove and install a new item	S1000DBIKE-AAA-DA0-10-10- 00AA-921A-A		2007-07-31	4	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Tire – Fill with air	S1000DBIKE-AAA-DA0-10-20- 00AA-215A-A		2007-07-31	3	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Tire – Check pressure	\$1000DBIKE-AAA-DA0-10-20- 00AA-362B-A		2007-07-31	3	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Front wheel – Fault reports and isolation procedures	\$1000DBIKE-AAA-DA0-10-20- 00AA-400A-A		2007-07-31	3	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Tire – Remove and install a new item	\$1000DBIKE-AAA-DA0-10-20- 00AA-921A-A		2007-07-31	3	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)

	(Continued)			
Document title	Data module code Publication module code	Issue date	No. of pages	Applicable to
Rear wheel – Detected fault	S1000DBIKE-AAA-DA0-20-00- 00AA-412A-A	2007-07-31	2	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Rear wheel – Remove procedures	\$1000DBIKE-AAA-DA0-20-00- 00AA-520A-A	2007-07-31	2	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Brake system – Description of how it is made	S1000DBIKE-AAA-DA1-00-00- 00AA-041A-A	2007-07-31	8	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Brake system – Manual test	\$1000DBIKE-AAA-DA1-00-00- 00AA-341A-A	2007-07-31	2	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Brake pads – Clean with rubbing alcohol	S1000DBIKE-AAA-DA1-10-00- 00AA-251A-A	2007-07-31	3	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Steering – Description of how it is made	\$1000DBIKE-AAA-DA2-00-00- 00AA-041A-A	N 2007-07-31	2	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)



	(Continued)				
Document title	Data module code Publication module code		Issue date	No. of pages	Applicable to
Stem – Remove procedures	\$1000DBIKE-AAA-DA2-10-00- 00AA-520A-A	С	2007-07-31	4	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Stem – Install procedures	\$1000DBIKE-AAA-DA2-10-00- 00AA-720A-A	С	2007-07-31	7	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Handlebar – Remove procedures	\$1000DBIKE-AAA-DA2-20-00- 00AA-520A-A	N	2007-07-31	7	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Handlebar – Install procedures	\$1000DBIKE-AAA-DA2-20-00- 00AA-720A-A	С	2007-07-31	3	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Headset – Description of how it is made	S1000DBIKE-AAA-DA2-30-00- 00AA-041A-A		2007-07-31	3	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Headset – Remove procedures	\$1000DBIKE-AAA-DA2-30-00- 00AA-520A-A	N	2007-07-31	4	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)



	(Continued)				
Document title	Data module code Publication module code		Issue date	No. of pages	Applicable to
Headset – Install procedures	\$1000DBIKE-AAA-DA2-30-00- 00AA-720A-A	С	2007-07-31	3	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Frame – Description of how it is made	S1000DBIKE-AAA-DA3-00-00- 00AA-041A-A		2007-07-31	3	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Horn – Isolated fault	S1000DBIKE-AAA-DA3-10-00- 00AA-411A-A		2007-02-28	2	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Horn – Remove and install a new item	S1000DBIKE-AAA-DA3-10-00- 00AA-921A-A		2007-07-31	3	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Drivetrain – Description of how it is made	S1000DBIKE-AAA-DA4-00-00- 00AA-041A-A		2007-07-31	1	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Chain – Oil	S1000DBIKE-AAA-DA4-10-00- 00AA-241A-A	С	2007-07-31	9	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)

	(Continued)			
Document title	Data module code Publication module code	Issue date	No. of pages	Applicable to
Chain – Clean with chain cleaning fluid	S1000DBIKE-AAA-DA4-10-00- 00AA-251B-A	2007-07-31	3	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Drive train – Correlated fault	\$1000DBIKE-AAA-DA4-10-00- 00AA-414A-A	2007-07-31	2	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Gears – Description of how it is made	\$1000DBIKE-AAA-DA5-00-00- 00AA-041A-A	2007-07-31	1	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Mechs – Description of how it is made	\$1000DBIKE-AAA-DA5-10-00- 00AA-041A-A	2007-07-31	5	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Hubs – Clean with degreasing agent	\$1000DBIKE-AAA-DA5-20-00- 00AA-251C-A	C 2007-07-31	5	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Shifters – Description of how it is made	\$1000DBIKE-AAA-DA5-30-00- 00AA-041A-A	2007-07-31	7	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)

	(Continued)			
Document title	Data module code Publication module code	Issue date	No. of pages	Applicable to
Section 2 – Electrical Lighting System	\$1000DBIKE-AAA-D00-00-00- 02AA-001A-A	2022-12-31	1	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Wiring data – Field description	\$1000DLIGHTING-AAA-D00-00- 00-00AA-029A-A	2007-07-31	1	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Electrical system – Description of how it is made and its function	\$1000DLIGHTING-AAA-D00-00- 00-00AA-040A-A	2007-07-31	2	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Wiring – Equipment lists	\$1000DLIGHTING-AAA-D00-00- 00-00AA-056A-A	N 2007-07-31	3	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Wiring – Wire list	\$1000DLIGHTING-AAA-D00-00- 00-00AA-057A-A	C 2007-07-31	7	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Wiring – Loom list	\$1000DLIGHTING-AAA-D00-00- 00-00AA-058A-A	C 2007-07-31	2	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)



(Continued)				
Document title	Data module code Publication module code	Issue date	No. of pages	Applicable to
Lights – Manual test	\$1000DLIGHTING-AAA-D00-00- 00-00AA-341A-A	2007-07-31	2	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Lights – Observed fault	S1000DLIGHTING-AAA-D00-00- 00-00AA-413A-A	2007-07-31	2	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Lighting – Assemble, install and connect procedures	\$1000DLIGHTING-AAA-D00-00- 00-00AA-700A-A	2007-07-31	3	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Lighting – Remove and install a new item	\$1000DLIGHTING-AAA-D00-00- 00-00AA-921A-A	2007-07-31	3	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Light system – Illustrated Parts Data - IPD	\$1000DLIGHTING-AAA-D00-00- 00-00AA-941A-D	2007-07-31	3	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)





## Change record

The change record displays the issue history of the publication.

	Issue number	Issue date	Issue number	Issue date
I	001	2022-12-31	002	2023-02-01





## **Highlights**

## Issue 002

The listed changes are included in issue 002, dated 2023-02-01, of this publication.

Data module code	Reason for update	
S1000DBIKE-AAA-D00-00-00-00AA-00TA-A	Up issue to 002	
S1000DBIKE-AAA-D00-00-00-00AA-041A-D		
S1000DBIKE-AAA-DA0-20-00-00AA-520A-A		
S1000DBIKE-AAA-D00-00-00-00AA-00QA-D		
S1000DBIKE-AAA-D00-00-00-00AA-00WA-D		
S1000DBIKE-AAA-D00-00-00-00AA-00QA-D		
S1000DBIKE-AAA-D00-00-00-00AA-022A-D	CPF 2006-47AA	
S1000DBIKE-AAA-D00-00-00-00AA-041A-A	CPF 2006-48AA	
S1000DBIKE-AAA-D00-00-00-00AA-041A-A	CPF 2006-47AA	
S1000DBIKE-AAA-D00-00-00-00AA-041A-A		
S1000DBIKE-AAA-D00-00-00-00AA-042A-A	CPF 2006-48AA	
S1000DBIKE-AAA-D00-00-00-00AA-042A-A	CPF 2006-47AA	
S1000DBIKE-AAA-D00-00-00-00AA-043A-A	CPF 2006-48AA	
S1000DBIKE-AAA-D00-00-00-00AA-043A-A	CPF 2006-47AA	
S1000DBIKE-AAA-D00-00-00-00AA-121A-A	CPF 2006-48AA	
S1000DBIKE-AAA-D00-00-00-00AA-121A-A	CPF 2006-47AA	
S1000DBIKE-AAA-D00-00-00-00AA-121A-A		
S1000DBIKE-AAA-D00-00-00-00AA-131A-A	CPF 2006-48AA	
S1000DBIKE-AAA-D00-00-00-00AA-131A-A	CPF 2006-47AA	
S1000DBIKE-AAA-D00-00-00-00AA-131A-A	CPF 2006-47AA	
S1000DBIKE-AAA-D00-00-00-00AA-131A-A	CPF 2006-47AA	
S1000DBIKE-AAA-D00-00-00-00AA-131A-A		
S1000DBIKE-AAA-D00-00-00-00AA-131A-A	Display changed	
S1000DBIKE-AAA-D00-00-00-00AA-151A-A	CPF 2006-48AA	
S1000DBIKE-AAA-D00-00-00-00AA-151A-A	CPF 2006-47AA	
S1000DBIKE-AAA-D00-00-00-00AA-258A-A	CPF 2006-48AA	



(Continued)		
Data module code	Reason for update	
S1000DBIKE-AAA-D00-00-00-00AA-258A-A	CPF 2006-47AA	
S1000DBIKE-AAA-D00-00-00-00AA-258A-A	Procedure has been changed	
S1000DBIKE-AAA-D00-00-00-00AA-258A-A	CPF 2006-47AA	
S1000DBIKE-AAA-D00-00-00-00AA-258A-A	Replaced by supplier	
S1000DBIKE-AAA-D00-00-00-00AA-258A-A	CPF 2006-47AA	
S1000DBIKE-AAA-D00-00-00-00AA-258A-A	Safty hazard reported	
S1000DBIKE-AAA-D00-00-00-00AA-258A-A	Safty hazard reported	
S1000DBIKE-AAA-D00-00-00-00AA-258A-A		
S1000DBIKE-AAA-D00-00-00-00AA-258A-A	Procedure has been changed	
S1000DBIKE-AAA-D00-00-00-00AA-258A-A	CPF 2006-47AA	
S1000DBIKE-AAA-D00-00-00-00AA-258A-A	Changed procedure for Mk9	
S1000DBIKE-AAA-D00-00-00-00AA-258A-A		
S1000DBIKE-AAA-D00-00-00-00AA-330A-A	CPF 2006-48AA	
S1000DBIKE-AAA-D00-00-00-00AA-330A-A	CPF 2006-47AA	
S1000DBIKE-AAA-D00-00-00-00AA-663A-A	CPF 2006-48AA	
S1000DBIKE-AAA-D00-00-00-00AA-663A-A	CPF 2006-47AA	
S1000DBIKE-AAA-D00-00-00-00AA-941A-D	CPF 2006-48AA	
S1000DBIKE-AAA-D00-00-00-00AA-941A-D	CPF 2006-47AA	
S1000DBIKE-AAA-D05-10-00-00AA-000A-A	CPF 2006-48AA	
S1000DBIKE-AAA-D05-10-00-00AA-000A-A	CPF 2006-47AA	
S1000DBIKE-AAA-D05-20-00-00AA-000A-A	CPF 2006-48AA	
S1000DBIKE-AAA-D05-20-00-00AA-000A-A	CPF 2006-47AA	
S1000DBIKE-AAA-D05-40-00-00AA-000A-A	CPF 2006-48AA	
S1000DBIKE-AAA-D05-40-00-00AA-000A-A	CPF 2006-47AA	

Produced by Docuneering Ltd

S1000DBIKE-AAA-D00-00-00-00AA-003A-A



(0	Continued)
Data module code	Reason for update
S1000DBIKE-AAA-DA0-00-00-00AA-041A-A	CPF 2006-48AA
\$1000DBIKE-AAA-DA0-00-00-00AA-041A-A	CPF 2006-47AA
S1000DBIKE-AAA-DA0-10-10-00AA-921A-A	CPF 2006-48AA
S1000DBIKE-AAA-DA0-10-10-00AA-921A-A	CPF 2006-47AA
S1000DBIKE-AAA-DA0-10-20-00AA-215A-A	CPF 2006-48AA
S1000DBIKE-AAA-DA0-10-20-00AA-215A-A	CPF 2006-47AA
S1000DBIKE-AAA-DA0-10-20-00AA-362B-A	CPF 2006-48AA
S1000DBIKE-AAA-DA0-10-20-00AA-362B-A	CPF 2006-47AA
S1000DBIKE-AAA-DA0-10-20-00AA-400A-A	CPF 2006-48AA
S1000DBIKE-AAA-DA0-10-20-00AA-400A-A	CPF 2006-47AA
S1000DBIKE-AAA-DA0-10-20-00AA-921A-A	CPF 2006-48AA
S1000DBIKE-AAA-DA0-10-20-00AA-921A-A	CPF 2006-47AA
S1000DBIKE-AAA-DA0-20-00-00AA-412A-A	CPF 2006-48AA
S1000DBIKE-AAA-DA0-20-00-00AA-412A-A	CPF 2006-47AA
\$1000DBIKE-AAA-DA0-20-00-00AA-520A-A	CPF 2006-48AA
S1000DBIKE-AAA-DA0-20-00-00AA-520A-A	CPF 2006-47AA
S1000DBIKE-AAA-DA1-00-00-00AA-041A-A	CPF 2006-48AA
S1000DBIKE-AAA-DA1-00-00-00AA-041A-A	CPF 2006-47AA
S1000DBIKE-AAA-DA1-00-00-00AA-041A-A	
S1000DBIKE-AAA-DA1-00-00-00AA-341A-A	CPF 2006-48AA
S1000DBIKE-AAA-DA1-00-00-00AA-341A-A	CPF 2006-47AA
S1000DBIKE-AAA-DA1-10-00-00AA-251A-A	CPF 2006-48AA
S1000DBIKE-AAA-DA1-10-00-00AA-251A-A	CPF 2006-47AA
S1000DBIKE-AAA-DA2-00-00-00AA-041A-A	CPF 2006-48AA
\$1000DBIKE-AAA-DA2-00-00-00AA-041A-A	CPF 2006-47AA
\$1000DBIKE-AAA-DA2-10-00-00AA-520A-A	CPF 2006-48AA
\$1000DBIKE-AAA-DA2-10-00-00AA-520A-A	CPF 2006-47AA
S1000DBIKE-AAA-DA2-10-00-00AA-720A-A	CPF 2006-48AA
\$1000DBIKE-AAA-DA2-10-00-00AA-720A-A	CPF 2006-47AA
S1000DBIKE-AAA-DA2-10-00-00AA-720A-A	
S1000DBIKE-AAA-DA2-10-00-00AA-720A-A	
S1000DBIKE-AAA-DA2-10-00-00AA-720A-A	
S1000DBIKE-AAA-DA2-10-00-00AA-720A-A	
S1000DBIKE-AAA-DA2-20-00-00AA-520A-A	CPF 2006-48AA
S1000DBIKE-AAA-DA2-20-00-00AA-520A-A	CPF 2006-47AA

Produced by Docuneering Ltd

Applicable to:

S1000DBIKE-AAA-D00-00-00-00AA-003A-A



S1000DBIKE-AAA-DA2-20-00-00AA-720A-A C	PF 2006-48AA PF 2006-47AA
\$1000DBIKE-AAA-DA2-20-00-00AA-720A-A \$1000DBIKE-AAA-DA2-20-00-00AA-720A-A \$1000DBIKE-AAA-DA2-20-00-00AA-720A-A \$1000DBIKE-AAA-DA2-20-00-00AA-720A-A	
\$1000DBIKE-AAA-DA2-20-00-00AA-720A-A \$1000DBIKE-AAA-DA2-20-00-00AA-720A-A \$1000DBIKE-AAA-DA2-20-00-00AA-720A-A	PF 2006-47AA
\$1000DBIKE-AAA-DA2-20-00-00AA-720A-A \$1000DBIKE-AAA-DA2-20-00-00AA-720A-A	
S1000DBIKE-AAA-DA2-20-00-00AA-720A-A	
S1000DBIKE-AAA-DA2-20-00-00AA-720A-A	
S1000DBIKE-AAA-DA2-20-00-00AA-720A-A	
S1000DBIKE-AAA-DA2-20-00-00AA-720A-A	
S1000DBIKE-AAA-DA2-20-00-00AA-720A-A	
S1000DBIKE-AAA-DA2-30-00-00AA-041A-A C	PF 2006-48AA
\$1000DBIKE-AAA-DA2-30-00-00AA-041A-A C	PF 2006-47AA
S1000DBIKE-AAA-DA2-30-00-00AA-520A-A C	PF 2006-48AA
S1000DBIKE-AAA-DA2-30-00-00AA-520A-A C	PF 2006-47AA
S1000DBIKE-AAA-DA2-30-00-00AA-720A-A C	PF 2006-48AA
S1000DBIKE-AAA-DA2-30-00-00AA-720A-A C	PF 2006-47AA
S1000DBIKE-AAA-DA2-30-00-00AA-720A-A	
S1000DBIKE-AAA-DA2-30-00-00AA-720A-A	
S1000DBIKE-AAA-DA2-30-00-00AA-720A-A	
S1000DBIKE-AAA-DA3-00-00-00AA-041A-A C	PF 2006-48AA
S1000DBIKE-AAA-DA3-00-00-00AA-041A-A C	PF 2006-47AA
S1000DBIKE-AAA-DA3-10-00-00AA-411A-A C	PF 2006-48AA
S1000DBIKE-AAA-DA3-10-00-00AA-411A-A C	PF 2006-47AA
S1000DBIKE-AAA-DA3-10-00-00AA-921A-A C	PF 2006-48AA
S1000DBIKE-AAA-DA3-10-00-00AA-921A-A C	PF 2006-47AA
S1000DBIKE-AAA-DA4-00-00-00AA-041A-A C	PF 2006-48AA
S1000DBIKE-AAA-DA4-00-00-00AA-041A-A C	PF 2006-47AA
S1000DBIKE-AAA-DA4-10-00-00AA-241A-A C	PF 2006-48AA
S1000DBIKE-AAA-DA4-10-00-00AA-241A-A C	PF 2006-47AA
S1000DBIKE-AAA-DA4-10-00-00AA-251B-A C	PF 2006-48AA
S1000DBIKE-AAA-DA4-10-00-00AA-251B-A C	PF 2006-47AA
S1000DBIKE-AAA-DA4-10-00-00AA-414A-A C	PF 2006-48AA
S1000DBIKE-AAA-DA4-10-00-00AA-414A-A C	PF 2006-47AA
S1000DBIKE-AAA-DA5-00-00-00AA-041A-A C	PF 2006-48AA
S1000DBIKE-AAA-DA5-00-00-00AA-041A-A C	PF 2006-47AA
S1000DBIKE-AAA-DA5-10-00-00AA-041A-A C	PF 2006-48AA

Applicable to:

Produced by Docuneering Ltd

S1000DBIKE-AAA-D00-00-00-00AA-003A-A



(Continued)			
Data module code	Reason for update		
S1000DBIKE-AAA-DA5-10-00-00AA-041A-A	CPF 2006-47AA		
S1000DBIKE-AAA-DA5-20-00-00AA-251C-A	CPF 2006-48AA		
S1000DBIKE-AAA-DA5-20-00-00AA-251C-A	CPF 2006-47AA		
S1000DBIKE-AAA-DA5-20-00-00AA-251C-A			
S1000DBIKE-AAA-DA5-20-00-00AA-251C-A			
S1000DBIKE-AAA-DA5-20-00-00AA-251C-A			
S1000DBIKE-AAA-DA5-30-00-00AA-041A-A	CPF 2006-48AA		
S1000DBIKE-AAA-DA5-30-00-00AA-041A-A	CPF 2006-47AA		
S1000DLIGHTING-AAA-D00-00-00-00AA-029A-A	CPF 2006-48AA		
S1000DLIGHTING-AAA-D00-00-00-00AA-029A-A	CPF 2006-47AA		
S1000DLIGHTING-AAA-D00-00-00-00AA-040A-A	CPF 2006-47AA		
S1000DLIGHTING-AAA-D00-00-00-00AA-056A-A	CPF 2006-48AA		
S1000DLIGHTING-AAA-D00-00-00-00AA-056A-A	CPF 2006-47AA		
S1000DLIGHTING-AAA-D00-00-00-00AA-056A-A	CPF 2006-47AA		
S1000DLIGHTING-AAA-D00-00-00-00AA-057A-A	CPF 2006-48AA		
S1000DLIGHTING-AAA-D00-00-00-00AA-057A-A	CPF 2006-47AA		
S1000DLIGHTING-AAA-D00-00-00-00AA-057A-A	CPF 2006-47AA		
S1000DLIGHTING-AAA-D00-00-00-00AA-058A-A	CPF 2006-48AA		
S1000DLIGHTING-AAA-D00-00-00-00AA-058A-A	CPF 2006-47AA		
S1000DLIGHTING-AAA-D00-00-00-00AA-058A-A	CPF 2006-47AA		
S1000DLIGHTING-AAA-D00-00-00-00AA-341A-A	CPF 2006-48AA		
S1000DLIGHTING-AAA-D00-00-00-00AA-341A-A	CPF 2006-47AA		
S1000DLIGHTING-AAA-D00-00-00-00AA-413A-A	CPF 2006-48AA		
S1000DLIGHTING-AAA-D00-00-00-00AA-413A-A	CPF 2006-47AA		
S1000DLIGHTING-AAA-D00-00-00-00AA-700A-A	CPF 2006-48AA		
S1000DLIGHTING-AAA-D00-00-00-00AA-700A-A	CPF 2006-47AA		
S1000DLIGHTING-AAA-D00-00-00-00AA-921A-A	CPF 2006-48AA		
S1000DLIGHTING-AAA-D00-00-00-00AA-921A-A	CPF 2006-47AA		
S1000DLIGHTING-AAA-D00-00-00-00AA-941A-D	CPF 2006-48AA		
S1000DLIGHTING-AAA-D00-00-00-00AA-941A-D	CPF 2006-47AA		

Produced by Docuneering Ltd





## List of abbreviations

Abbreviation	Definition	
None		





## List of terms

Term	Definition
None	





## List of symbols

Symbol	Definition	
None		





#### **Technical standard record**

The following record confirms that this publication incorporates all technical changes necessitated by the following modifications listed below.

Mod No. ESA 65

ESA70 ESA3690

ESA7174

DT28

PA562

PA569

SE132

TR20

TR22 TR23

Service bulletin X4-A-00-21-00-05B-930A-A

X4-A-00-21-00-06A-930A-A

X4-A-00-22-00-11A-930A-A

X4-A-00-23-00-05C-930A-A





### **Table of contents**

The listed documents are included in issue 002, dated 2023-02-01, of this publication.

Document title	Data module code Publication module code	Issue date	No. of pages	Applicable to
Title page	S1000DBIKE-AAA-D00-00-00- 00AA-001A-A	2022-12-31	1	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Configuration	S1000DBIKE-AAA-D00-00-00- 00AA-020A-A	2022-12-31	1	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Copyright statements	S1000DBIKE-AAA-D00-00-00- 00AA-021A-A	2022-12-31	1	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Administrative and legal statements	S1000DBIKE-AAA-D00-00-00- 00AA-023A-A	2022-12-31	1	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Safety statements	S1000DBIKE-AAA-D00-00-00- 00AA-012A-A	2022-12-31	1	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Change record	S1000DBIKE-AAA-D00-00-00- 00AA-00TA-A	2022-12-31	1	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)



	(Continued)			
Document title	Data module code Publication module code	Issue date	No. of pages	Applicable to
Technical standard record	S1000DBIKE-AAA-D00-00-00- 00AA-008A-A	2022-12-31	1	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Products cross-reference table	\$1000DBIKE-AAA-D00-00-00- 00AA-00PA-D	2007-08-21	2	All
Conditions cross-reference table	\$1000DBIKE-AAA-D00-00-00- 00AA-00QA-D	2007-08-21	2	All
Applicability cross-reference table	\$1000DBIKE-AAA-D00-00-00- 00AA-00WA-D	2007-08-21	1	All
Introduction	S1000DBIKE-AAA-D00-00-00- 00AA-018A-A	2022-12-31	1	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Section 1 – Mountain bicycle manual	S1000DBIKE-AAA-D00-00-00- 01AA-001A-A	2022-12-31	1	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Mountain bicycle – Business rules	S1000DBIKE-AAA-D00-00-00- 00AA-022A-D	2007-07-31	9	All
Bicycle – Description of how it is made	S1000DBIKE-AAA-D00-00-00- 00AA-041A-A	2007-07-31	3	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Bicycle – Description of function	S1000DBIKE-AAA-D00-00-00- 00AA-042A-A	2007-07-31	3	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Bicycle – Description attributed to crew	S1000DBIKE-AAA-D00-00-00- 00AA-043A-A	2007-07-31	2	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)



	(Continued)			
Document title	Data module code Publication module code	Issue date	No. of pages	Applicable to
Bicycle – Pre-operation procedures (crew)	S1000DBIKE-AAA-D00-00-00- 00AA-121A-A	2007-07-31	6	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Bicycle – Normal operation procedures (crew)	S1000DBIKE-AAA-D00-00-00- 00AA-131A-A	2007-07-31	3	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Bicycle – Post-operation procedures (crew)	\$1000DBIKE-AAA-D00-00-00- 00AA-151A-A	2007-07-31	3	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Bicycle – Other procedures to clean	\$1000DBIKE-AAA-D00-00-00- 00AA-258A-A	2007-07-31	7	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Bicycle – Place on test stand	S1000DBIKE-AAA-D00-00-00- 00AA-330A-A	2007-07-31	2	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Bicycle – Standard repair procedures	S1000DBIKE-AAA-D00-00-00- 00AA-663A-A	2007-07-31	13	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Bicycle – Illustrated Parts Data - IPD	\$1000DBIKE-AAA-D00-00-00- 00AA-941A-D	2007-07-31	3	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)



	(Continued)			
Document title	Data module code Publication module code	Issue date	No. of pages	Applicable to
Bicycle – Time limits	S1000DBIKE-AAA-D05-10-00- 00AA-000A-A	2007-07-31	1	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Bicycle – Scheduled maintenance lists	S1000DBIKE-AAA-D05-20-00- 00AA-000A-A	2007-07-31	11	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Bicycle – Scheduled maintenance checks	\$1000DBIKE-AAA-D05-40-00- 00AA-000A-A	2007-07-31	2	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Wheel – Description of how it is made	\$1000DBIKE-AAA-DA0-00-00- 00AA-041A-A	2007-07-31	7	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Inner tube – Remove and install a new item	S1000DBIKE-AAA-DA0-10-10- 00AA-921A-A	2007-07-31	4	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Tire – Fill with air	S1000DBIKE-AAA-DA0-10-20- 00AA-215A-A	2007-07-31	3	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Tire – Check pressure	S1000DBIKE-AAA-DA0-10-20- 00AA-362B-A	2007-07-31	3	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)



	(Continued)			
Document title	Data module code Publication module code	Issue date	No. of pages	Applicable to
Front wheel – Fault reports and isolation procedures	S1000DBIKE-AAA-DA0-10-20- 00AA-400A-A	2007-07-31	3	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Tire – Remove and install a new item	\$1000DBIKE-AAA-DA0-10-20- 00AA-921A-A	2007-07-31	3	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Rear wheel – Detected fault	S1000DBIKE-AAA-DA0-20-00- 00AA-412A-A	2007-07-31	2	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Rear wheel – Remove procedures	\$1000DBIKE-AAA-DA0-20-00- 00AA-520A-A	2007-07-31	2	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Brake system – Description of how it is made	S1000DBIKE-AAA-DA1-00-00- 00AA-041A-A	2007-07-31	8	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Brake system – Manual test	S1000DBIKE-AAA-DA1-00-00- 00AA-341A-A	2007-07-31	2	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Brake pads – Clean with rubbing alcohol	S1000DBIKE-AAA-DA1-10-00- 00AA-251A-A	2007-07-31	3	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)



	(Continued)			
Document title	Data module code Publication module code	Issue date	No. of pages	Applicable to
Steering – Description of how it is made	\$1000DBIKE-AAA-DA2-00-00- 00AA-041A-A	2007-07-31	2	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Stem – Remove procedures	S1000DBIKE-AAA-DA2-10-00- 00AA-520A-A	2007-07-31	4	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Stem – Install procedures	S1000DBIKE-AAA-DA2-10-00- 00AA-720A-A	2007-07-31	7	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Handlebar – Remove procedures	\$1000DBIKE-AAA-DA2-20-00- 00AA-520A-A	2007-07-31	7	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Handlebar – Install procedures	S1000DBIKE-AAA-DA2-20-00- 00AA-720A-A	2007-07-31	3	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Headset – Description of how it is made	\$1000DBIKE-AAA-DA2-30-00- 00AA-041A-A	2007-07-31	3	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Headset – Remove procedures	\$1000DBIKE-AAA-DA2-30-00- 00AA-520A-A	2007-07-31	4	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)



	(Continued)			
Document title	Data module code Publication module code	Issue date	No. of pages	Applicable to
Headset – Install procedures	S1000DBIKE-AAA-DA2-30-00- 00AA-720A-A	2007-07-31	3	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Frame – Description of how it is made	\$1000DBIKE-AAA-DA3-00-00- 00AA-041A-A	2007-07-31	3	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Horn – Isolated fault	\$1000DBIKE-AAA-DA3-10-00- 00AA-411A-A	2007-02-28	2	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Horn – Remove and install a new item	\$1000DBIKE-AAA-DA3-10-00- 00AA-921A-A	2007-07-31	3	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Drivetrain – Description of how it is made	\$1000DBIKE-AAA-DA4-00-00- 00AA-041A-A	2007-07-31	1	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Chain – Oil	\$1000DBIKE-AAA-DA4-10-00- 00AA-241A-A	2007-07-31	9	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Chain – Clean with chain cleaning fluid	S1000DBIKE-AAA-DA4-10-00- 00AA-251B-A	2007-07-31	3	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)



	(Continued)			
Document title	Data module code Publication module code	Issue date	No. of pages	Applicable to
Drive train – Correlated fault	\$1000DBIKE-AAA-DA4-10-00- 00AA-414A-A	2007-07-31	2	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Gears – Description of how it is made	S1000DBIKE-AAA-DA5-00-00- 00AA-041A-A	2007-07-31	1	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Mechs – Description of how it is made	S1000DBIKE-AAA-DA5-10-00- 00AA-041A-A	2007-07-31	5	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Hubs – Clean with degreasing agent	S1000DBIKE-AAA-DA5-20-00- 00AA-251C-A	2007-07-31	5	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Shifters – Description of how it is made	S1000DBIKE-AAA-DA5-30-00- 00AA-041A-A	2007-07-31	7	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Section 2 – Electrical Lighting System	S1000DBIKE-AAA-D00-00-00- 02AA-001A-A	2022-12-31	1	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Wiring data – Field description	\$1000DLIGHTING-AAA-D00-00- 00-00AA-029A-A	2007-07-31	1	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)



	(Continued)			
Document title	Data module code Publication module code	Issue date	No. of pages	Applicable to
Electrical system – Description of how it is made and its function	\$1000DLIGHTING-AAA-D00-00- 00-00AA-040A-A	2007-07-31	2	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Wiring – Equipment lists	\$1000DLIGHTING-AAA-D00-00- 00-00AA-056A-A	2007-07-31	3	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Wiring – Wire list	\$1000DLIGHTING-AAA-D00-00- 00-00AA-057A-A	2007-07-31	7	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Wiring – Loom list	\$1000DLIGHTING-AAA-D00-00- 00-00AA-058A-A	2007-07-31	2	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Lights – Manual test	\$1000DLIGHTING-AAA-D00-00- 00-00AA-341A-A	2007-07-31	2	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Lights – Observed fault	\$1000DLIGHTING-AAA-D00-00- 00-00AA-413A-A	2007-07-31	2	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Lighting – Assemble, install and connect procedures	\$1000DLIGHTING-AAA-D00-00- 00-00AA-700A-A	2007-07-31	3	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)



	(Continued)			
Document title	Data module code Publication module code	Issue date	No. of pages	Applicable to
Lighting – Remove and install a new item	S1000DLIGHTING-AAA-D00-00- 00-00AA-921A-A	2007-07-31	3	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Light system – Illustrated Parts Data - IPD	S1000DLIGHTING-AAA-D00-00- 00-00AA-941A-D	2007-07-31	3	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)



# List of applicable specifications and documentation

Technical publication	Title
	Local Disposal Procedures





# List of support equipment

Name	Identifiaction/ Reference	Manufacturer
8mm Allen wrench	BSK-TLST-001-08	KZ666
Chain cleaning fluid	LL-003	KZ222
Chain cleaning tool	BSK-TLST-001-03	KZ666
Clean dry cloth	BSK-TLST-001-12	KZ666
Extra firm hold hairspray	HSP-D001	HS111
Floor covering	PPP-001	KK999
Foot pump	BSK-TLST-001-05	KZ666
Marker pen	BSK-TLST-001-07	KZ666
Set of Allen wrenches	BSK-TLST-001-13	KZ666
Specialist toolset	BSK-TLST-001	KZ666
Sponge	BSK-TLST-001-11	KZ666
Stiff bristle brush	BSK-TLST-001-02	KZ666
Test stand	BSK-TLST-999-01	KZ666
Tire lever	BSK-TLST-001-04	KZ666
Tire pressure gauge	BSK-TLST-001-01	KZ666
Water hose	BSK-TLST-001-09	KZ666
Work stand	Stand-001	KZ555
Work stand	Stand-001	Bikey
Work stand	Stand-001	Stand





# List of supplies

Name	Identifiaction/ Reference	Manufacturer
Degreasing agent	LL-004	KZ222
Detergent A	BSK-TLST-023-14	KZ666
Detergent B	BSK-TLST-001-15	KZ666
Dry lube	LL-006	KZ222
Floor covering		
General grease	LL-005	KZ222
General lubricant	LL-001	KZ222
Rubbing alcohol	LL-002	KZ222
Wet lube	LL-007	KZ222





# **List of spares**

Name	Identifiaction/ Reference	Manufacturer
Brake cable hangar	BR-LVRS-002	KT444
Brake lever	BR-LVRS-001	KT444
Brake lever mount	BR-LVRS-001-01	KT444
Bulb	LIRUS-L1-11	KZ777
Conical expansion washer	St-001-05	KZ555
Dust seal	St-001-04	KZ555
Frame fork	St-001-02	KZ555
Handlebar	Hd-001	KZ555
Handlebar grips	Hd-001-01	KZ555
Handlebar plug	Hd-001-02	KZ555
Inner-tube	IT-001	KT222
Shifter lever	SI-001	KZ555
Stem	St-001	KZ555
Stem bolt	St-001-01	KZ555
Tire	TIRES-010101	KT666
Upper bearing cup	St-001-03	KZ555





### **List of illustrations**

Data module code	Figure	Title
S1000DBIKE-AAA-D00-00-00-00AA-041A-A	Fig 1	Complete bicycle
S1000DBIKE-AAA-D00-00-00-00AA-121A-A	Fig 1	Hydraulic brake function
	Fig 2	Brake pad seating
S1000DBIKE-AAA-D00-00-00-00AA-258A-A	Fig 1	Cleaning the bike
	Fig 2	Degreasing the freehub
S1000DBIKE-AAA-D00-00-00-00AA-663A-A	Fig 1	Unseating the tire with a tire lever
	Fig 2	Circle leak
	Fig 3	Sanding the application area
	Fig 4	Apply glue to application area
	Fig 5	Apply pressure to tube
S1000DBIKE-AAA-D00-00-00-00AA-941A-D	Fig 1	Bicycle
S1000DBIKE-AAA-DA0-00-00-00AA-041A-A	Fig 1	Parts of the wheel
	Fig 2	The tire and rim
	Fig 3	Valve
S1000DBIKE-AAA-DA0-10-10-00AA-921A-A	Fig 1	Removing the inner tube
S1000DBIKE-AAA-DA1-00-00-00AA-041A-A	Fig 1	Cantilever brake with straddle cable
	Fig 2	Exploded diagram of a brake
	Fig 3	Typical components of a mountain bicycle lever
S1000DBIKE-AAA-DA2-10-00-00AA-520A-A	Fig 1	Remove the bolt
S1000DBIKE-AAA-DA2-10-00-00AA-720A-A	Fig 1	Lubricate the thread
	Fig 2	Tighten the bolt
S1000DBIKE-AAA-DA2-20-00-00AA-520A-A	Fig 1	Loosen the clamp screw with the Allen wrench
	Fig 2	Loosen the clamp bolt
S1000DBIKE-AAA-DA2-30-00-00AA-041A-A	Fig 1	Headset
S1000DBIKE-AAA-DA2-30-00-00AA-520A-A	Fig 1	Lift the upper bearing cup
S1000DBIKE-AAA-DA3-00-00-00AA-041A-A	Fig 1	Welded frame joints
	Fig 2	Frame
S1000DBIKE-AAA-DA4-10-00-00AA-241A-A	Fig 1	Derailleur pivots
	Fig 2	Derailleur tension
	Fig 3	Brake lever pivots
	Fig 4	Lubricate the chain
S1000DBIKE-AAA-DA5-10-00-00AA-041A-A	Fig 1	Front derailleur

Produced by Docuneering Ltd

Applicable to:

S1000DBIKE-AAA-D00-00-00-00AA-00AA-A



	(Continue	ed)
Data module code	Figure	Title
	Fig 2	Rear derailleur
S1000DBIKE-AAA-DA5-20-00-00AA-251C-A	Fig 1	Removing the axle
S1000DBIKE-AAA-DA5-30-00-00AA-041A-A	Fig 1	Thumb shifter index type
	Fig 2	Unscrew wingnut
	Fig 3	Loosen the nut
	Fig 4	Loosen the shifter clamp bolt
\$1000DLIGHTING-AAA-D00-00-00-00AA- 040A-A	Fig 1	Lighting system
S1000DLIGHTING-AAA-D00-00-00-00AA- 941A-D	Fig 1	Light system



### **Product cross-reference table**

Table 1 List of product instances

Identifier	Туре	Value	
Product instance			
serialno	Product attribute	1B070643	
model	Product attribute	Brook trekker	
version	Product attribute	Mk9	
versrank	Product attribute	2	
SB-S001	Condition	Pre	
Product instance			
serialno	Product attribute	1B070644	
model	Product attribute	Brook trekker	
version	Product attribute	Mk9	
versrank	Product attribute	1	
SB-S001	Condition	Post	
Product instance			
serialno	Product attribute	1B070701	
model	Product attribute	Mountain storm	
version	Product attribute	Mk1	
versrank	Product attribute	1	
SB-S001	Condition	Pre	





# Condition cross-reference table

#### Table 1 Common types of conditions

Name	Description	Data type	Values	
ld		Value patter	n	
Service bulletin	Generic service bulletin type	String	Pre Post	
SB				

#### Table 2 Conditions

Name	Condition type	Description	Data type	References	Dependency
Display name (Id)	Alias	Prompt	Value pattern	Condition ref group	_
Service bulletin S001 - Chain guard	SB	Service bulletin S001 for the installation of the chain guard	String	\$1000DBIKE-AAA-D00- 00-00-00AA-041A-D	
displayname (SB-S001)					

#### Table 3 Incorporation

ld	Issue No.	References	Date	Status
SB-S001		S1000DBIKE-AAA-DA0-20-00-00AA-520A-A	2007-07-31	Incorporated





### Applicability cross-reference table

Conditions cross-reference table: S1000DBIKE-AAA-D00-00-00-00AA-00QA-D Products cross-reference table: S1000DBIKE-AAA-D00-00-00-00AA-00PA-D

Table 1 Product attribute list

Name	Description	Data type	Values
Display name (Id)	_	Value pattern	_
Serial number	Serial number etched on the frame	String	
(serialno)			
Model	Model of the bike	String	Brook trekker Mountain
(model)			storm
Version	Version of the bike	String	Mk1 Mk9
(version)			
Version rank	Version rank	String	1~3
(versrank)			





### Introduction

Introduction goes here... 1





# **Section 1**

Mountain bicycle manual





# Mountain bicycle

### **Business rules**

Table of contents		Page
References Business rules exchange		1 1
List of tables		
1 References		1
	References	
	Table 1 References	
Data module / Technical publication	Title	
None		

### Business rules exchange

#### Context rules

#### Table 2 Context rules

No.	[Allowed object flag] Object path/Notation name			
	Object use	Object value [Tailoring]	Meaning	
1	//dmaddres/dmc/avee/modelic			
	Bike model identification	S1000DBIKE	S1000D Bike platform	
			S1000D Bike light system	
2	//dmaddres/dmc/avee/chapnum			
	Systems (Bike specific SNS)	D00		



#### Table 2 Context rules (Continued)

Object use	Object value [Tailoring]	Meaning
//dmaddres/dmc/avee/section	Lianomigi	
Subsystems (Bike specific SNS)	0	
//dmaddres/dmc/avee/subsect	O .	
Subsubsystems	0	
//dmaddres/dmc/avee/subject	O .	
Units of assembly	00	
//dmaddres/dmc/avee/incode		
Bike information codes	000	In accordance with Issue 2.3
		In accordance with Issue 2.3
		In accordance with Issue 2.3
		In accordance with Issue 2.3
		In accordance with Issue 2.3
		In accordance with Issue 2.3
		In accordance with Issue 2.3
		In accordance with Issue 2.3
		In accordance with Issue 2.3
		In accordance with Issue 2.3
		In accordance with Issue 2.3
		In accordance with Issue 2.3
		In accordance with Issue 2.3
		In accordance with Issue 2.3
		In accordance with Issue 2.3
		In accordance with Issue 2.3
		In accordance with Issue 2.3
		In accordance with Issue 2.3
		In accordance with Issue 2.3
		In accordance with Issue 2.3
		In accordance with Issue 2.3
		In accordance with Issue 2.3
		In accordance with Issue 2.3
		In accordance with Issue 2.3
		In accordance with Issue 2.3
		In accordance with Issue 2.3



Table 2 Context rules (Continued)

No.	[Allowed object flag] Object path/Notation name			
	Object use	Object value [Tailoring]	Meaning	
			In accordance with Issue 2.3	
			In accordance with Issue 2.3	
			In accordance with Issue 2.3	
			In accordance with Issue 2.3	
			In accordance with Issue 2.3	
7	//descendant-or-self::seqlist[and	cestor-or-self::descript]		
8	//note[ancestor-or-self::warning	]		
9	//warning/seqlist			
10	//warning/deflist			
11	//warning/randlist/item/randlist			
12	//warning/randlist/title			
13	//note[ancestor-or-self::caution]	l		
14	//caution/seqlist			
15	//caution/deflist			
16	//caution/randlist/item/randlist			
17	//caution/randlist/title			
18	//@accpnltype			
	Type of access panel	accpnl01	Access is a door	
			Access is a panel	
			Access is an electrical panel	

Produced by Docuneering Ltd



No.	[Allowed object flag] Object path/Notation name			
	Object use	Object value [Tailoring]	Meaning	
19	//acronym/@acrotype			
	Type of acronym or abbreviation	at01	Acronym (Candidate for list of abbreviations) - Default value	
			Term (Candidate for list of terms)	
			Symbol (Candidate for list of symbols)	
			Spec (Candidate for list of applicable specs)	
20	//dialog/@cancel-caption			
	Caption for dialog cancel function	ca01	Sets the caption to "CANCEL"	
			Sets the caption to "ABORT"	
			Sets the caption to "NO"	
			Sets the caption to "END"	
			Sets the caption to "QUIT"	
21	//security/@class			
	Security classification	01	(lowest level of security classification eg Unclassified)	
22	//security/@commcls			
	Commercial security classification	cc51	Open	
23	//caption/@colour			
	Caption color	co00	None	
			Green	
			Amber	
			Yellow	
			Red	
			White	
			Grey	
			Clear - Default value	
			Blue (used on Bike Computer Display	
24	//priority/@cprio			
	Priority level of a comment	cp01	Routine	
			Emergency	
			Safty critical	



	Table 2	Context rules	(Continued)
--	---------	---------------	-------------

Object use //crewmem/@crewmem	Object value [Tailoring]	Meaning
//crewmem/@crewmem		
Type of crew member required for drill or procedural step	cm01	All
		Bike rider
		Bike technician
//drill/@drilltyp		
//emphasis/@emph		
Type of emphasis	em01	Bold - Default value
		Italic (only for legacy data, see Chap 3.9.1)
		Underline (only for legacy data, see Chap 3.9.1)
		Overline (only for marking vectors)
		Strikethrough (not to be used to mark deleted text)
//instloc/@instloctyp		
Type of install location	instloctyp01	Zone
		Section
		Station
		Water line
		Buttock line
//maintlevel/@mntlvl		
Maintenance level	ml01	Level 1 (home)
		Level 2 (authorized workshop)
//@originator		
Origin of equipment/harness/wire	orig01	Manufacturer
		Vendor
		Partner
<u> </u>		
Prefix of 'randlist' items, limited to three variants	pf01	Simple (No prefix, only indent)
		Unorder (Depending on list level, prefix with short dash for first level, bullet for
	//emphasis/@emph Type of emphasis  //instloc/@instloctyp Type of install location  //maintlevel/@mntlvl Maintenance level  //@originator Origin of equipment/harness/wire  //randlist/@prefix Prefix of 'randlist' items, limited to	//emphasis/@emph Type of emphasis em01  //instloc/@instloctyp Type of install location instloctyp01  //maintlevel/@mntlvl Maintenance level ml01  //@originator Origin of equipment/harness/wire orig01  //randlist/@prefix Prefix of 'randlist' items, limited to pf01

Produced by Docuneering Ltd

Applicable to: All

S1000DBIKE-AAA-D00-00-00-00AA-022A-D



Table 2 C	Context rules	(Continued)
-----------	---------------	-------------

	Object use	Object value [Tailoring]	Meaning
		[ranormg]	second, and short dash for third level ISOpub: bull, dash) - Default value
			Dash (short dash - ISOpub: dash)
2	//parasigdata/@psdtype		
	Paragraph significant data type	psd01	Ammunition
			Instruction disposition
			Lubricant
			Maintenance level
			Manufacturer code
			Manufacturers recommendation
			Modification code
			Qualification code
			Training level
3	//quantity/@qtytype		
	Quantity data type	qty01	Length
			Price
			Temperature
			Time
			Torque value
			Voltage
			Volume
			Mass
4	//dialog/@reset-caption		
	Caption for dialog reset caption	re01	Sets the caption to "RESET"
			Sets the caption to "CLEAR"
5	//response/@rsptype		
	Type of response to a comment	rt01	Accepted
			Pending
			Partially accepted
			Rejected
3	//@skill		
	Personnel skill level	sk01	Basic
			Intermediate

Produced by Docuneering Ltd

Applicable to: All



	Table 2 Context rules (Continued)			
No. [Allowed object flag] Object path/Notation name				
	Object use	Object value [Tailoring]	Meaning	
			Advanced	
37	//deftask/@skilltype			
38	//@submit-caption			
	Caption for dialog submit function	ok01	Sets the caption to "OK"	
			Sets the caption to "SUBMIT"	
			Sets the caption to "YES"	
			Sets the caption to "CONTINUE"	
			Sets the caption to "EXIT"	
39	//supervis/@sup.lev			
	Supervisor level	sl01	Low	
			Low intermediate	
			High intermediate	
			High	
40	//@taskcode			
	Task code	taskcd01	Detailed inspection (DET)	
			Discard (DIS)	
			Functional Check (FNC)	
			General visual inspection (GVI)	
			Lubrication (LUB)	
			Operational check (OPC)	
			Restoration (RST)	
			Servicing (SVC)	
			Visual check (VCK)	
41	//@tccode			
	Technical condition type (used for techcond techcondid)	tc01	Modification: a design change defined by the manufacturer	
			Service bulletin: a design change defined by the manufacturer but applied after product delivery to the customer	
			Engineering order: a design change equivalent to a service bulletin but defined by the customer	
			Specific technical condition not tracked like modification and service bulletin	

Produced by Docuneering Ltd Applicable to: All

S1000DBIKE-AAA-D00-00-00-00AA-022A-D



Table 2	Context rules	(Continued)
---------	---------------	-------------

٠٠.	[Allowed object flag] Object path/Notation name			
	Object use	Object value [Tailoring]	Meaning	
2	//limittype/@type			
	Limit type	ItO1	Time between overhaul	
			Hard time	
			Since last maintenance	
			Out time limit	
			On condition	
			Check maintenance	
			Functional check	
3	//threshold/@uom			
	Unit of measurement for the threshold interval	th03	Months	
			Weeks	
			Years	
			Days	
			Shop visits	
			Auxiliary power unit change	
			Wheel change	
4	//verbatim/@vstyle			
	Verbatim style	vs01	Generic verbatim	
			Filename	
			XML/SGML markup	
			XML/SGML element name	
			XML/SGML attribute name	
			XML/SGML attribute value	
			XML/SGML entity name	
			XML/SGML processing instruction	
			Program prompt	
			User input	
			Computer output	
			Program listing	
			Program variable name	
			Program variable value	
			Constant	



No.	Table 2 Context rules (Continued)  D. [Allowed object flag] Object path/Notation name			
	Object use	Object value [Tailoring]	Meaning	
			Class name	
			Parameter name	
45	//@qtyuom			





### Description of how it is made

Table	of co	ontents		Page
	Refe	rencesription	a bicycle	1 1
List o	f tabl	es		
	1	References		1
	2			
List o	f figu	res		
	1	Complete bicycle		2
			References	
			Table 1 References	
Data m	odule /	Technical publication	Title	
None				


## Description

# 1 Physical description of a bicycle

A bicycle (refer to Fig 1) is a frame and a number of movable components with mechanical parts that are completely open. There are no covers or sheet metal panels that prevent access to the mechanical parts. Thus, you can disassemble the different components of a bicycle (refer to Fig 1 [0]) to do:

- an inspection
- a maintenance task
- a repair task



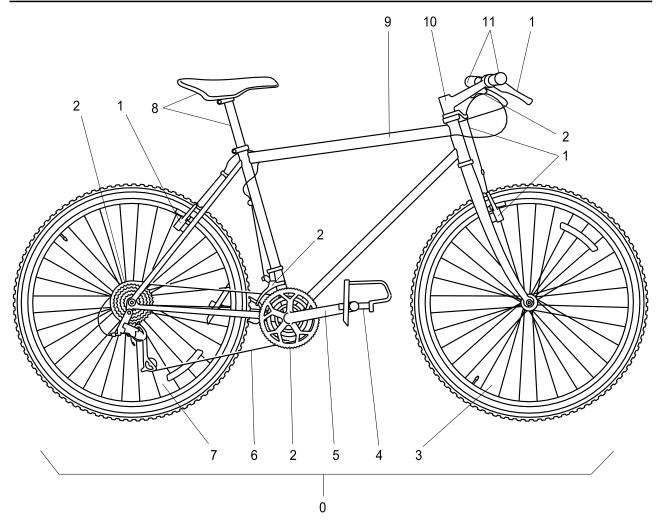

ICN-S1000DBIKE-AAA-D000000-0-U8025-00536-A-04-1 Fig 1 Complete bicycle

The parts that you can immediately identify on a bicycle are given in Table 1.

Table 2 Bicycle parts

Item	Refer to	Definition
Frame	Fig 1 [9]	A bicycle frame is made of metal tubes that are welded together.
Wheels		The wheels include these parts:
		<ul><li>Hub</li><li>Spokes</li><li>Metal rim</li><li>Rubber tire</li></ul>
- Rear wheel	Fig 1 [7]	

Table 2 Bicvcle parts (Continued)	Table 2	Bicycle	narts	(Continued)
-----------------------------------	---------	---------	-------	-------------

Item	Refer to	Definition
- Front wheel	Fig 1 [3]	
Seat and seat post	Fig 1 [8]	These install into the seat tube with a mechanism you can use to change the height.
Handle bars	Fig 1 [11]	A horizontal bar that attaches to the stem with grips at the ends that attach to the brake levers and the shifters.
Handle bar stem	Fig 1 [10]	This attaches the handle bar to the steering tube (head set).
Cranks	Fig 1 [5]	A lever that extends from the bottom of the bracket to the pedal.
Pedals	Fig 1 [4]	The two platforms for the feet that attach to the crank.
Chain	Fig 1 [6]	A circular set of links that connect the chain ring to the cogs on the freewheel.
Gears	Fig 1 [2]	The gears include:
		<ul><li>Front chain ring</li><li>Rear freewheel</li><li>Front and the rear derailleur</li><li>Shift lever on the handle bars</li><li>Cables</li></ul>
Brakes	Fig 1 [1]	The brakes include:
		<ul><li>Actuators on the handlebars</li><li>Brake cable</li><li>Brake callipers</li><li>Brake pads</li></ul>





# Description of function

able of contents	Page
Description of function  References  Description	1 1
1 Functional description of a bicycle	1
1 References	1

### References

#### Table 1 References

Data module / Technical publication	Title
S1000DBIKE-AAA-DA3-00-00-00AA-041A-A	Frame – Description of how it is made
S1000DBIKE-AAA-DA0-00-00-00AA-041A-A	Wheel – Description of how it is made
S1000DBIKE-AAA-DA2-20-00-00AA-720A-A	Handlebar – Install procedures
S1000DBIKE-AAA-DA5-30-00-00AA-041A-A	Shifters – Description of how it is made
S1000DBIKE-AAA-DA2-10-00-00AA-720A-A	Stem – Install procedures
S1000DBIKE-AAA-DA2-10-00-00AA-520A-A	Stem – Remove procedures
S1000DBIKE-AAA-DA5-00-00-00AA-041A-A	Gears – Description of how it is made
S1000DBIKE-AAA-DA1-00-00-00AA-041A-A	Brake system – Description of how it is made
S1000DBIKE-AAA-DA2-20-00-00AA-520A-A	Handlebar – Remove procedures
S1000DBIKE-AAA-DA4-10-00-00AA-251B-A	Chain – Clean with chain cleaning fluid
S1000DBIKE-AAA-DA5-10-00-00AA-041A-A	Mechs – Description of how it is made

## **Description**

# 1 Functional description of a bicycle

Below is a list of the different bic	vcle components and a ful	nctional description of them.

Frame	The frame is the skeleton of the bicycle. Refer to \$1000DBIKE-AAA-DA3-00-00-00AA-041A-A for a functional description of the frame system.
Wheel	The wheel is the point of contact between the bicycle and the road for the bicycle to have movement. Refer to S1000DBIKE-

Applicable to: Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)

S1000DBIKE-AAA-D00-00-00-00AA-042A-A



AAA-DA0-00-00AA-041A-A for a functional description of t	he
whool	

Spokes The spokes are thick wires with tension applied that connect the

hub to the rim. You can adjust the tension with the nipple on the

rim side.

Hub The hub attaches to the center of the wheel where the axle and

the bearings are.

Metal rim The metal rim is a metal ring that has a U-shaped cross section

to hold the spokes on the inner side and the tire on the outer

side.

Seat The Seat, which is also known as the 'saddle', is used as the

support platform for the person to sit on the bicycle.

Seat post The Seat post is used as a support post for the seat and to

change the height of the seat for the rider.

Handle bar The handle bar is a horizontal bar with handles on each end.

The handle bar is a steering mechanism that the rider uses to change the direction of the bicycle. The brake levers are also on the handle bar. Refer to S1000DBIKE-AAA-DA2-20-00-00AA-720A-A for information on how to install the handle bar. Refer to S1000DBIKE-AAA-DA2-20-00-00AA-520A-A for information on

removing the handlebar.

Handle bar stem The handle bar stem (the stem) attaches the handle bar to

the steering tube. Refer to S1000DBIKE-AAA-DA2-10-00-00AA-720A-A for information on how to install a stem. Refer to S1000DBIKE-AAA-DA2-10-00-00AA-520A-A for information on

how to remove the stem.

Brake levers When you operate the brake lever, the brake pads move

against the wheel to decrease the speed. The brake lever on the left side operates the front brake. The brake lever on the

right side operates the rear brake.

Brakes When you operate the brakes, the brake pad moves against

the wheel to decrease the speed of the bicycle. Refer to \$1000DBIKE-AAA-DA1-00-00-00AA-041A-A for a description of

the braking system.

Shifters The shifters are the mechanisms that you use to change the

gears on the bicycle. There are 7 different types of shifters that have been developed over the years, but they all have the same functionality. When you operate the shifters, they pull the control cable to move the derailleur towards a larger diameter chain ring. The shifters can also loosen the cable to let the derailleur move towards a smaller diameter chain ring. Refer to \$1000DBIKE-AAA-DA5-30-00-00AA-041A-A for a functional

description of the shifters.

Crank The crank moves the power to the chain rings when the pedals

operate.





cranks.

Chain The chain moves the power from the chain rings to the cogs on

the freewheel. Refer to S1000DBIKE-AAA-DA4-10-00-00AA-

251B-A for the procedure on how to clean the chain.

Gears The gears have different mechanisms that function together to

change the speed of the bicycle. These mechanisms include:

the sprockets the chain the derailleur

Refer to S1000DBIKE-AAA-DA5-00-00-00AA-041A-A for a

functional description of the gear system.

The chain rings (also known as the 'chain wheel') pull on the Chain rings

chain when the cranks turn.

Derailleur A derailleur moves the chain from one sprocket to another to

change the gears. There are two different types of derailleur, the front and the rear. The highest ratio (highest gear) is when the chain is on the largest sprocket on the front and the smallest at the rear. To get the lowest gear, the smallest sprocket is at the front and the largest at the rear. Refer to \$1000DBIKE-AAA-DA5-10-00-00AA-041A-A for a functional description of the

derailleur system.





### Description attributed to crew

Table of con	tents	Page
Descrip Refere	otion attributed to crew	
1 2.1 2.2	Introduction	1
2.3 2.4	Shifters	2
2.5	Pedals	2
List of table	s	
1	References	1

### References

#### Table 1 References

Data module / Technical publication	Title
S1000DBIKE-AAA-DA5-30-00-00AA-041A-A	Shifters – Description of how it is made

### 1 Introduction

Data about the bicycle and its control system is given in this document. This data will help you operate the bicycle.

2

### 2.1 Controls

Data about the controls that follow is given in this document:

- Para 2.2
- Para 2.3
- Para 2.4
- Para 2.5

### 2.2 Steering

The handlebars are used to steer the bike. They are at the front of the bicycle. You hold one of the handlebar grips with each hand and move the handle bar to change the direction of the bike.



#### 2.3 **Shifters**

The gears control the ratio of pedal rotation to wheel rotation. You can change this with the shifters S1000DBIKE-AAA-DA5-30-00-00AA-041A-A . The shifters are on the handlebar.

A description of the two Table 2 follows.

Shifter Location	Affected Gears
Left	The buttons on the left shifter changes the gears on the front derailleur.
Right	The buttons on the right shifter changes the gears on the rear derailleur.

#### 2.4 **Brakes**

### **WARNING**

If you operate the front brake without the rear brake you can cause a crash.

You can decrease the speed of the bike with the brakes. You operate the brakes with the brake levers on the handlebar.

A description of the brake levers Table 2.

Brake Lever Location	Affected Gears
Left	This lever operates the front brake.
Right	This lever operates the rear brake.

#### 2.5 **Pedals**

The pedals are at the bottom of the seat tube. You operate the pedals to move the bicycle forward.



# Pre-operation procedures (crew)

Table of co	ontents		Page
Refe Prelii Proc	rences minary requirements edure		1 1 2
List of tabl	es		
1 2 3 4 5 6 7	Required conditions	expendables	
List of figu	res		
1 2			
	R	eferences	
	Tabl	le 1 References	
Data module /	Technical publication	Title	
S1000DBIKE-A	AA-DA4-10-00-00AA-251B-A	Chain – Clean with chain cleaning	fluid

# Preliminary requirements

# **Required conditions**

### Table 2 Required conditions

Action / Condition	Data module / Technical publication
None	



### **Required persons**

### Table 3 Required persons

Persons	Category	Skill level	Trade/Trade code	Estimated time
Man A	Basic user		Operator	0,25 h

### Support equipment

### Table 4 Support equipment

Name	Manufacturer / Part No.	Quantity	Remark
Tire pressure gauge	MFR: KZ666 /PN: BSK-TLST-001-01	1 EA	
Specialist toolset	MFR: KZ666 /PN: BSK-TLST-001	1 EA	

### Consumables, materials and expendables

#### Table 5 Consumables, materials and expendables

Name	Manufacturer / Part No.	Quantity	Remark
General lubricant	MFR: KZ222 /PN: LL-001	As required	

### **Spares**

### Table 6 Spares

Name	Manufacturer / Part No.	Quantity	Remark
None			

# **Safety conditions**

None

### **Procedure**

1.1	Open the brake quick release.
1.2	Examine the condition and the thickness of the brake pads.
1.2.1	Make sure that there is a large quantity of rubber left.
1.2.2	Make sure that the pad is not too hard.
1.3	Clean all the unwanted material.

Examine the condition of the brakes.

1



- 2 Do an inspection of the installation of the brakes.
- 2.1 Check the hydraulic brake system function.




ICN-S1000DBIKE-AAA-DA10000-0-U8025-00537-A-03-1

Fig 1, Other Hydraulic brake function

2.2 Make sure that there is sufficient clearance between the pad and the inner diameter of the brake surface.

2.3 CAUTION

If the position of the pads is too low on the rim, as shown in Fig 2, the pads can move. This could cause the separation of the spokes from their mountings., they could slip off causing the spokes to be torn out of their mountings.

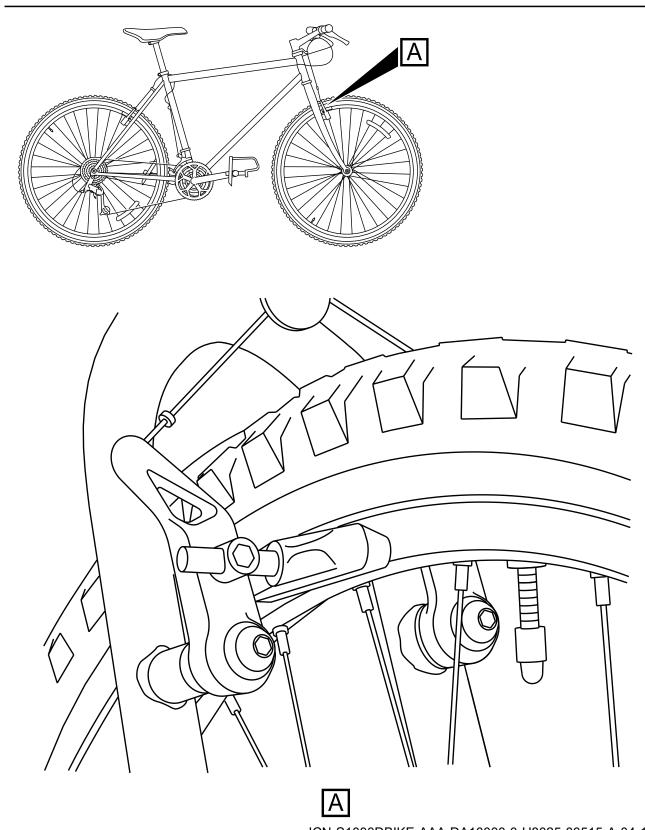

ICN-S1000DBIKE-AAA-DA10000-0-U8025-00515-A-04-1 Fig 2 Brake pad seating

Applicable to: Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)

S1000DBIKE-AAA-D00-00-00-00AA-121A-A



	Make sure that the pads are correctly installed in the center of the inner diameter of the brake surface.
3	Do a check of the tire pressure.
3.1	Do a check of the tire pressure with the Tire pressure gauge .
3.2	Compare the value you read with the recommended pressure that is shown into the sidewall of the tire.
3.3	Add the necessary air.
4	Examine the condition of the wheels.
4.1	Examine the rims for bulges and dents.
4.2	Examine for splits at the seam where an extruded rim is bonded.
5	Do a check of the headset bearings.
5.1	Straddle the bicycle.
	Apply the front brakes and push the handle bars forward.
5.2	Make sure that the headset bearings are tight.
6	Do the checks on the chain.
6.1	Visually examine the chain.
	If the chain is too dirty, clean it as specified in the clean chain task (refer to \$1000DBIKE-AAA-DA4-10-00-00AA-251B-A ).
6.1.1	Visually examine the chain for links that are frozen or that do not move easily.
6.1.2	Apply the necessary General lubricant .
6.2	Do a check of the chain to make sure that it is tight.
6.2.1	Make sure that the play of the chain is not too much.
6.2.1.1	Move the chain on the largest chain ring.
6.2.1.2	Try to pull the chain away from the front of the chain ring.
	Make sure that the chain is not loose. Tighten the chain if, when you pull it away from the chain ring, you can see a full tooth.
6.2.2	Tighten the chain with the Allen wrench from the Specialist toolset.



# Requirements after job completion

# **Required conditions**

Table 7 Required conditions

Action / Condition	Data module / Technical publication
None	



# Normal operation procedures (crew)

Table of contents	Page
Normal operation procedures (crew)References	1 1
List of tables	
1 References	1
Referen	ces
Table 1 Refe	rences
Data module / Technical publication Tit	e
None	

## **Pre-ride inspection**

#### **Brakes**

Pa	Pads				
1	Pads	Free of unwante	ed material		
2	Pads	Acceptable pad	width		
3	Pads	Acceptable pad	clearance		
Callipers 1 Link Wire		. Firmly attached			
Le 1	Levers  1 Levers			efore	
2	Levers	Space between lever and handlebar when fully pulled			
Ca	ables				
1	Cables	No cuts or fraying			
	Tires				
1	Pressure				
		Tire Pressures	Min	Max	
		Off Road	35lbs	40lbs	



		(Continued)		
		Tire Pressures	Min	Max
		On Road	55lbs	60lbs
2	Tires	No cracks or spl	its	
	Wheels			
1	Wheels	No loose bearing	gs	
2	Wheels	True		

3 Spokes...... Not broken

If: Spokes not broken

4 Spokes..... Tight

5 Axel Nuts...... Tight

Headset

Headset bearings...... Tight

1 Links..... Easy movement of links

### Handlebar

### **WARNING**

#### Do not ride with a cracked stem

If: Stem cracked

1 Procedure Replace stem

Else if: Stem is loose

1 Procedure Tighten stem

If: Handlebars twist in stem

2 Procedure Tighten clamp bolt

Computer Display

#### Computer

•	Computer Display	Applicable to. Mountain Storm Mk		
		ALTITUDE	0 miles	
	SPEED	0 mph		
		DISTANCE	0 miles	

Applicable to: Mountain storm Mk1



S1000DBIKE-X1234-00030-00



Applicable to: Brook trekker Mk9

0 mph **SPEED** DISTANCE 0 miles





# Post-operation procedures (crew)

Table of c	ontents	Page
Ref	st-operation procedures (crew) ferencesliminary requirements	1
Pro	cedure	
Red	quirements after job completion	3
List of tak	oles	
1 2 3 4 5 6	References Required conditions Support equipment Consumables, materials and expendables Spares Required conditions	
	References	
	Table 1 References	
Data module	/ Technical publication Title	
None		

## Preliminary requirements

# **Required conditions**

### Table 2 Required conditions

Action / Condition	Data module / Technical publication	
None		

# **Support equipment**

### Table 3 Support equipment

Name	Manufacturer / Part No.	Quantity	Remark
Specialist toolset	MFR: KZ666 /PN: BSK-TLST-001	1 EA	



### Consumables, materials and expendables

Table 4 Consumables, materials and expendables

Name	Manufacturer / Part No.	Quantity Remark	
General lubricant	MFR: KZ222 /PN: LL-001	As required	

### **Spares**

### Table 5 Spares

Name	Manufacturer / Part No.	Quantity	Remark
None			

### **Safety conditions**

None

### **Procedure**

- 1 Clean the bicycle.
- 1.1 Clean the bicycle with water.
- 1.2 Use the brush from the Specialist toolset to clean the brakes, the shift levers, the sprockets and the tires.
- 1.3 Let the bicycle dry.
- 2 Lubricate the bicycle
- 2.1 Spray the General lubricant, to these moving parts:

the brake pivots

the derailleur pivots

the derailleur tension guides

the brake lever pivots

the control cables

the gear sprockets

the chain

2.2 Remove the lubricant which is more than the necessary.



# Requirements after job completion

# **Required conditions**

Table 6 Required conditions

Action / Condition Data module / Technical publication	
None	





# Other procedures to clean

Table of contents	Page
References Preliminary requirements Procedure	1
List of tables	
2 Required conditions . 3 Required persons 4 Required persons 5 Support equipment 6 Consumables, materi 7 Spares	
List of figures	
	References
	Table 1 References
Data module / Technical publication	Title
S1000DBIKE-AAA-DA4-10-00-00AA-241	IA-A Chain – Oil

# Preliminary requirements

# **Required conditions**

Table 2 Required conditions

Action / Condition	Data module / Technical publication	
The bicycle is outdoors		



Applicable to: Mountain bicycle Brook trekker Mk9

### Required persons

Table 3 Required persons

Persons	Category	Skill level	Trade/Trade code	Estimated time
Man A	Chemical technician	Intermediate	Bike cleaner	1,0 h

Applicable to: Mountain bicycle Mountain storm Mk1

### Required persons

### Table 4 Required persons

Persons	Category	Skill level	Trade/Trade code	Estimated time
Man B	Operator	Intermediate	Bike rider	1,0 h

### Support equipment

### Table 5 Support equipment

Name	Manufacturer / Part No.	Quantity	Remark
Water hose	MFR: KZ666 /PN: BSK-TLST-001-09	1 EA	
Stiff bristle brush	MFR: KZ666 /PN: BSK-TLST-001-02	1 EA	
Sponge	MFR: KZ666 /PN: BSK-TLST-001-11	1 EA	

# Consumables, materials and expendables

### Table 6 Consumables, materials and expendables

Name	Manufacturer / Part No.	Quantity	Remark
Degreasing agent	MFR: KZ222 /PN: LL-004	1 L	
Detergent A	MFR: KZ666 /PN: BSK-TLST-023-14	1 L	
Applicable to: Mountai	n bicycle Brook trekker Mk9		
Detergent B	MFR: KZ666 /PN: BSK-TLST-001-15	1 L	

### **Spares**

#### Table 7 Spares

Name	Manufacturer / Part No.	Quantity	Remark	
None				



### Safety conditions

### **WARNING**

Do not get into your eyes. If it gets into your eyes, wash them immediately in clean warm water.

### **WARNING**

Do not get into your eyes. If it gets into your eyes, wash them immediately in clean warm water.

### **CAUTION**

Do not use a Water hose that has high pressure. A water hose that has high pressure can cause some parts to become loose or full of water.

### **CAUTION**


Do not point the hose directly at the hub or at the bottom bracket bearings. This can cause damage to the parts.

### **CAUTION**

Apply Detergent B in accordance with the instruction on the container. The substance may cause damage to the Bike paint if it is not applied correctly.

### **Procedure**


1 Clean the bicycle with water to remove all dirt. Refer to Fig 1.

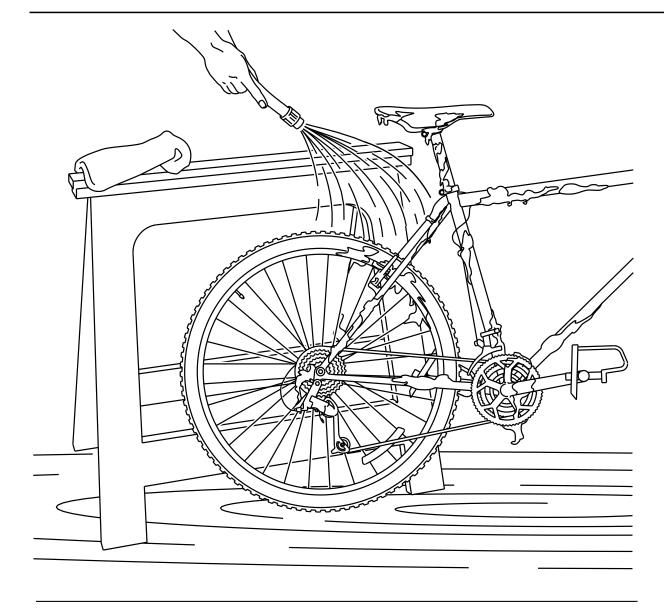

ICN-S1000DBIKE-AAA-D000000-0-U8025-00502-A-04-1

Fig 1 Cleaning the bike

- Use a Stiff bristle brush to get access to areas that are not easy to clean. These are the shift levers, the knobbly tires, and the brakes.
- 3 Clean the caked grime from the chain and the sprockets with a screwdriver that has a small blade.
- Remove the grease from the freewheel assembly with the Degreasing agent as shown in Fig 2 . Use a brush to remove the grease from these parts:
  - sprockets
  - guide and tension wheels of the derailleur
  - chain ring teeth

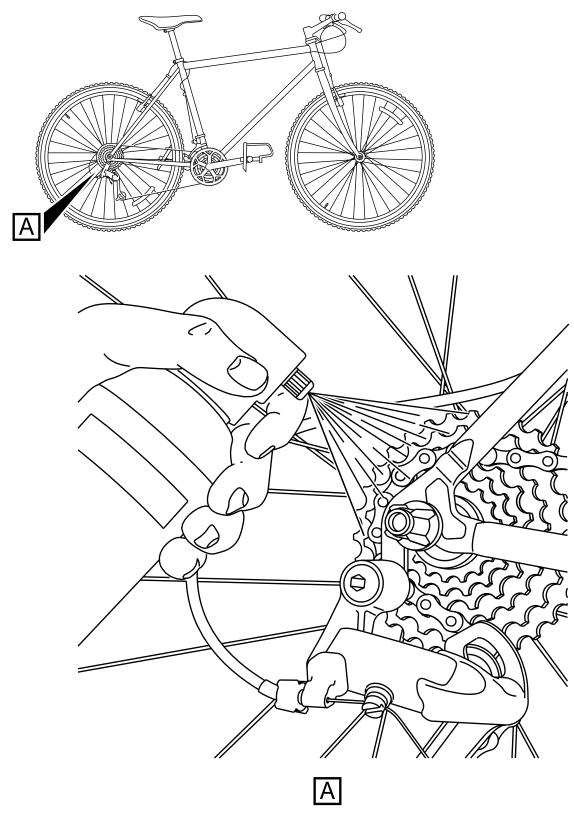

ICN-S1000DBIKE-AAA-DA52000-0-U8025-00523-A-04-1

Fig 2 Degreasing the freehub



5 Flush the sprockets, the derailleurs, the chain rings and the chain with water. **NOTE** If necessary, do the flush procedure again. Applicable to: Mountain bicycle Mountain storm Mk1 6.1 Soak the Sponge into Detergent A and water. 6.2 Clean the bicycle with the soaked sponge. 6.3 Flush the bicycle and make sure that all Detergent A is removed. 6.4 Move the bicycle up and down on its tires to remove all water. Applicable to: Mountain bicycle Brook trekker Mk9 7.1 Soak the Sponge into Detergent B and water. 7.2 Clean the bicycle with the soaked sponge. 7.3 Soak the Sponge into Detergent A and water. 7.4 Fully clean the bicycle with the soaked sponge. 7.5 Flush the bicycle to make sure that all detergents are removed. 7.6 Move the bicycle up and down on its tires to remove all water.

# Requirements after job completion

Lubricate the bicycle (refer to S1000DBIKE-AAA-DA4-10-00-00AA-241A-A).

## **Required conditions**

#### Table 8 Required conditions

Action / Condition	Data module / Technical publication
Make sure the bicycle is dry	

8



## Place on test stand

Table (	of contents	Page
List of	Place on test stand	1 1 2
LIST OF	1 References 2 Required conditions 3 Required persons 4 Support equipment 5 Consumables, materials and expendables 6 Spares 7 Required conditions	
	References	
	Table 1 References	
Data mo	odule / Technical publication Title	
None		

# Preliminary requirements

# **Required conditions**

### Table 2 Required conditions

Action / Condition	Data module / Technical publication
None	

# **Required persons**

### Table 3 Required persons

Persons	Category	Skill level	Trade/Trade code	Estimated time
Man A	Basic user		Operator	0,25 h

**UNCLASSIFIED** 

Produced by Docuneering Ltd Applicable to: Mountain bicycle and (Mountain storm Mk1 or

S1000DBIKE-AAA-D00-00-00-00AA-330A-A



## Support equipment

### Table 4 Support equipment

Name	Manufacturer / Part No.	Quantity	Remark
Test stand	MFR: KZ666 /PN: BSK-TLST-999-01	1 EA	

## Consumables, materials and expendables

#### Table 5 Consumables, materials and expendables

Name	Manufacturer / Part No.	Quantity	Remark
None			

## **Spares**

### Table 6 Spares

Name	Manufacturer / Part No.	Quantity	Remark
None			

## **Safety conditions**

None

### **Procedure**

- 1 Ensure Test stand is level.
- 2 Place bicycle on the test stand.
- Tight clamps until bicycle is securely attach to the test stand.

# Requirements after job completion

# Required conditions

### Table 7 Required conditions

Action / Condition	Data module / Technical publication
None	



# Standard repair procedures

Table of	f contents	Page
 	Standard repair procedures References Preliminary requirements Procedure Requirements after job completion	1 
List of t	tables	
; ;	1 References	
List of f	figures	
2	1 Unseating the tire with a tire lever	
	References	
	Table 1 References	
Data mod	ule / Technical publication Title	
S1000DBII	KE-AAA-DA0-20-00-00AA-520A-A Rear wheel – Remo	ove procedures

# Preliminary requirements

# **Required conditions**

#### Table 2 Required conditions

Table 2 Trequires considere			
Action / Condition	Data module / Technical publication		
None			



## Required persons

### Table 3 Required persons

Persons	Category	Skill level	Trade/Trade code	Estimated time
Man A	Operator	Basic	Bike rider	0,5 h

## Support equipment

#### Table 4 Support equipment

Name	Manufacturer / Part No.	Quantity	Remark
Tire lever	MFR: KZ666 /PN: BSK-TLST-001-04	1 EA	
Foot pump	MFR: KZ666 /PN: BSK-TLST-001-05	1 EA	
Marker pen	MFR: KZ666 /PN: BSK-TLST-001-07	1 EA	
Tube patch kit	MFR: KZ666 /PN: BSK-TLST-001-07	1 EA	

# Consumables, materials and expendables

Table 5 Consumables, materials and expendables

Name	Manufacturer / Part No.	Quantity	Remark
None			

# **Spares**

#### Table 6 Spares

Name	Manufacturer / Part No.	Quantity	Remark
Inner-tube	MFR: KT222 /PN: IT-001	1 EA	

# Safety conditions

#### **CAUTION**

When you remove the rear wheel to repair a puncture, disconnect the brake arm from the chain stay.

### **Procedure**


- 1 Remove the rear wheel. (Refer to S1000DBIKE-AAA-DA0-20-00-00AA-520A-A)
- 2 Make sure that there is no air in the tube.
- 2.1 Loosen the cap on the valve stem.

Produced by Docuneering Ltd

Applicable to: Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)



- 2.2 Push the valve stem core down to bleed all the air.
- 3 Use a Tire lever to move the tire bead out of its seat. Lift the tire bead above the lip of the rim.

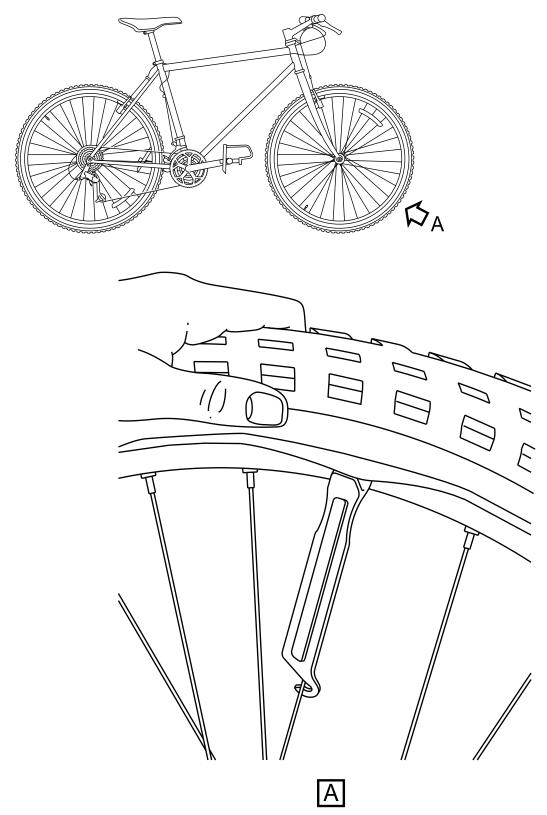



ICN-S1000DBIKE-AAA-DA00000-0-U8025-00506-A-04-1

Fig 1 Unseating the tire with a tire lever



- 4 Remove the tube.
- 5 Inflate (not fully) the tube with the Foot pump. Examine the tube for leaks.
- 6 If you find a leak, identify it with a circle made with a Marker pen.

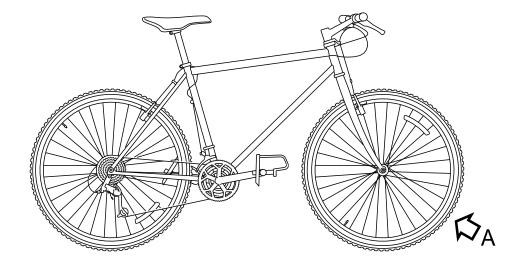

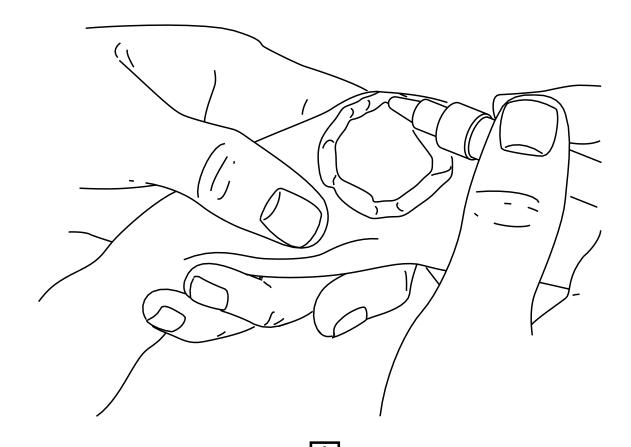


ICN-S1000DBIKE-AAA-DA01010-0-U8025-00508-A-04-1 Fig 2 Circle leak



- 7 Release most of the air.
- 8 Use a piece of sandpaper from the Tube patch kit and make the area on and around the hole rough. This will help the patch bond correctly.



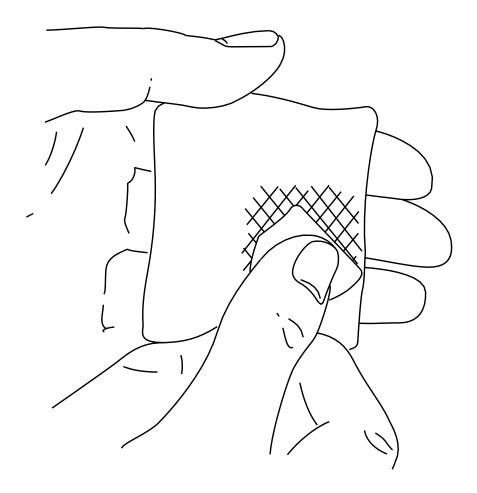





ICN-S1000DBIKE-AAA-DA01010-0-U8025-00509-A-04-1

Fig 3 Sanding the application area



Apply a thin layer of glue from the patch kit on and around the hole. Make sure that the area with the glue is larger than the patch.

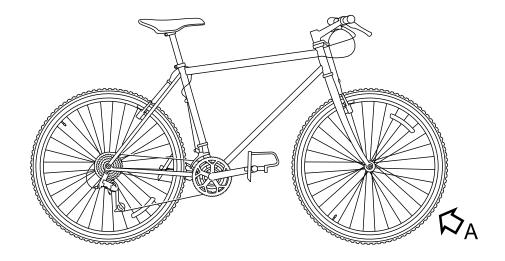

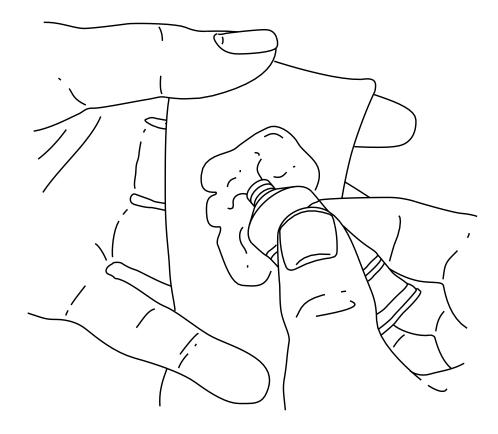


Α

ICN-S1000DBIKE-AAA-DA01010-0-U8025-00510-A-04-1

Fig 4 Apply glue to application area



- 10 Let the glue dry for five minutes until it becomes tacky and dim.
- 11 Remove the rear foil from the patch (that is a part of the patch kit) and push the patch in its position.
- Push with your thumbs from the center of the patch to the outer part of the applied area.

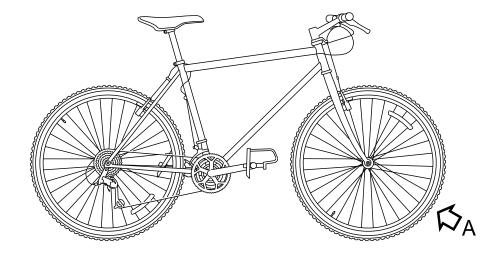



ICN-S1000DBIKE-AAA-DA01010-0-U8025-00511-A-04-1
Fig 5 Apply pressure to tube



13	Remove the thin cover from the patch.
14	Put a very thin layer of talcum powder on and around the patch.
15	Inflate (not fully) the repaired tube with the foot pump.
16	Start at the valve stem and install the tube again between the tire and the rim.
17	Push the valve stem through the hole in the rim.
18	Make sure that the valve stem is straight.
19	Install the remaining of the tire.

# Requirements after job completion

# **Required conditions**

Table 7 Required conditions


Action / Condition	Data module / Technical publication
None	





## Illustrated Parts Data - IPD

Table o	Page				
Illustrated Parts Data - IPD					
List of	tables				
	1 I	References		1	
List of	figures	<b>3</b>			
	1 i	Bicycle		2	
			References		
			Table 1 References		
Data mod	lule / Tec	hnical publication	Title		
None					

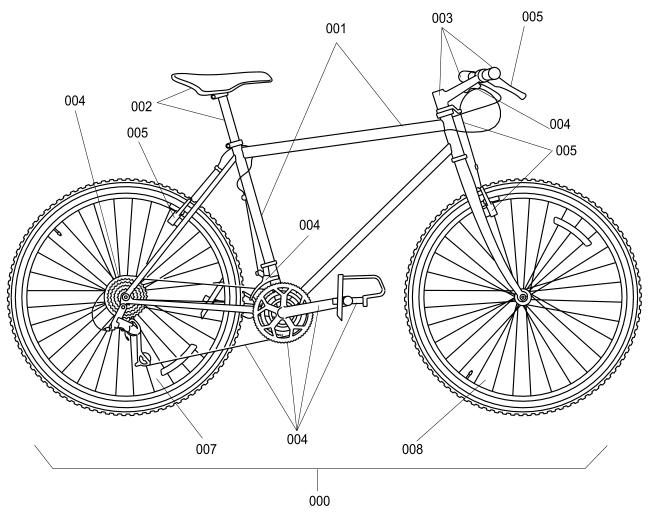

ICN-S1000DBIKE-AAA-D000000-0-U8025-00536-B-04-1 Fig 1 Bicycle



# Initial provisioning project information

 IPP number:
 KZ9990001

 IPP subject:
 BICYCLE

 IPP file identifier:
 s

Fig	Item	Units per assembly / Unit of issue	NCAGE	Part No. NATO Stock No.	Description	* Usable on ICY code assy • MV/Effect
0/0						
	0	REF	KZ999	BICYCLE-001	Bicycle	• MB
	1	1 EA	KZ999	BICYCLE-001/1	<ul> <li>Frame assembly</li> </ul>	• MB
	2	1 EA	KZ999	BICYCLE-001/2A	• • Seat, assembly	• MB
	2	1 EA	KZ999	BICYCLE-001/2B	• • Cruiser Seat, assembly	• MB
	3	1 EA	KZ999	BICYCLE-001/3	• • Steering system	• MB
	4	1 EA	KZ999	BICYCLE-001/4	• • Drive train system	• MB
	5	1 EA	KZ999	BICYCLE-001/5	• • Brake sub-system	• MB
	6	1 EA	KZ777	LRU1001	• • Light system	• MB
	7	1 EA	KZ888	WH-001	• • Wheel, assembly rear	• MB
	8	1 EA	KZ888	WH-002	• • Wheel, assembly front	• MB
	9	1 EA	KZ888	CP-001	• • Computer	• MB





## Time limits

lable of contents		Page
Time limits		1
References		1
Time limits		1
List of tables		
1 References		1
	References	
	Table 1 References	
Data module / Technical publication	Title	

## Time limits

Ident	Equipment	Qty	Time limits	Applicability
001	Bicycle MFR: KZ555 /PN: Bicycle-001	1 EA	Category: Cat Type: Functional check 1 Day ± 1 Category: Cat Type: On condition 1 Day	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
002	Brake pads MFR: KT444 /PN: BR- PADS-001	4 EA	Category: Cat Type: On condition 1 Month	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
003	Chain MFR: KZ555 /PN: Ch-001		Type: On condition 1 Month	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
004	Hub bearings MFR: KZ555 /PN: HB-001	2 EA	Category: Cat Type: Check maintenance 6 Month ± 1	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)

None



Page



# **Bicycle**

## Scheduled maintenance lists

## List of tasks

Task ident	Description
001	To do the pre-ride checks
002	To do the post-ride maintenance
003	Clean brake pads
004	Clean the chain
005	Clean the hub bearings

Scheduled maintenance lists	1
References	2
Task ident: 001	2
Task ident: 002	
Task ident: 003	
	_

## List of tables

**Table of contents** 

1	References	2
2	Required conditions	2
3	Required persons	2
4	Support equipment	3
5	Consumables, materials and expendables	3
6	Spares	3
7	Required conditions	4
8	Required persons	4
9	Support equipment	4
10	Consumables, materials and expendables	4
11	Spares	4
12	Required conditions	6
13	Required persons	6
14	Support equipment	6
15	Consumables, materials and expendables	6
16	Spares	6
17	Required conditions	8
18	Required persons	
19	Support equipment	8
20	Consumables, materials and expendables	8
21	Spares	8
22	Required conditions	
23	Required persons	. 10

Produced by Docuneering Ltd

Applicable to: Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)



	4	_ £	4 -  -		
LIS	:T (	OT.	tabi	les	(Continued)
	•	•	-		(Continuou)

24	Support equipment	10
	Consumables, materials and expendables	
26	Spares	10

## References

#### Table 1 References

Data module / Technical publication	Title
S1000DBIKE-AAA-D00-00-00-00AA-121A-A	Bicycle – Pre-operation procedures (crew)
S1000DBIKE-AAA-D00-00-00-00AA-151A-A	Bicycle – Post-operation procedures (crew)
S1000DBIKE-AAA-DA1-10-00-00AA-251A-A	Brake pads – Clean with rubbing alcohol
S1000DBIKE-AAA-DA4-10-00-00AA-251B-A	Chain – Clean with chain cleaning fluid
S1000DBIKE-AAA-DA0-20-00-00AA-520A-A	Rear wheel – Remove procedures

## Task ident: 001

Worthiness limitation:	Recommended
Task description:	To do the pre-ride checks

## Requirement source

Source of requirement:	MRB
Approval:	ap01
Issue No.:	001
Issue Date:	2006-01-01
FEC:	Evident, safety

# Preliminary requirements

# **Required conditions**

## Table 2 Required conditions

Action / Condition	Data module / Technical publication
None	

# Required persons

## Table 3 Required persons

Persons	Category	Skill level	Trade/Trade code	Estimated time
Man A	Basic user		Operator	0,25 h

Applicable to: Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)

S1000DBIKE-AAA-D05-20-00-00AA-000A-A



## Support equipment

Table 4 Support equipment

Name	Manufacturer / Part No.	Quantity	Remark
Tire pressure gauge	MFR: KZ666 /PN: BSK-TLST-001-01	1 EA	
Specialist toolset	MFR: KZ666 /PN: BSK-TLST-001	1 EA	

## Consumables, materials and expendables

### Table 5 Consumables, materials and expendables

Name	Manufacturer / Part No.	Quantity	Remark
General lubricant	MFR: KZ222 /PN: LL-001	As required	

## **Spares**

### Table 6 Spares

Name	Manufacturer / Part No.	Quantity	Remark
None			

## Safety conditions

None

#### References

S1000DBIKE-AAA-D00-00-00-00AA-121A-A

### Equipment

Bicycle

MFR: KZ555 /PN: Bicycle-001

#### Limit

Perform once 1 Day ± 1

Inspection type: Daily

### **Applicability**

Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)



## Task ident: 002

Worthiness limitation: Recommended

Task description:...... To do the post-ride maintenance

## Preliminary requirements

## **Required conditions**

### Table 7 Required conditions

Action / Condition	Data module / Technical publication
None	

## Required persons

#### Table 8 Required persons

Persons	Category	Skill level	Trade/Trade code	Estimated time
Man A	Basic user		Operator	0,25 h

## **Support equipment**

### Table 9 Support equipment

Name	Manufacturer / Part No.	Quantity	Remark
Specialist toolset	MFR: KZ666 /PN: BSK-TLST-001	1 EA	

# Consumables, materials and expendables

#### Table 10 Consumables, materials and expendables

Name	Manufacturer / Part No.	Quantity	Remark
General lubricant	MFR: KZ222 /PN: LL-001	As required	

# **Spares**

Produced by Docuneering Ltd

### Table 11 Spares

Name	Manufacturer / Part No.	Quantity	Remark
None			

# **Safety conditions**

None

Applicable to: Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)

S1000DBIKE-AAA-D05-20-00-00AA-000A-A



### References

S1000DBIKE-AAA-D00-00-00-00AA-151A-A

## **Equipment**

Bicycle

MFR: KZ555 /PN: Bicycle-001

### Limit

Perform periodically Condition: Dirty 1 Day ± 1

Inspection type: Daily

## **Applicability**

Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)



Task ident: 003

Worthiness limitation: Recommended

Task description: Clean brake pads

## Preliminary requirements

## **Required conditions**

### Table 12 Required conditions

Action / Condition	Data module / Technical publication
None	

## Required persons

#### Table 13 Required persons

Persons	Category	Skill level	Trade/Trade code	Estimated time
Man A	Basic user		Operator	0,25 h

## **Support equipment**

### Table 14 Support equipment

Name	Manufacturer / Part No.	Quantity	Remark
None			

# Consumables, materials and expendables

#### Table 15 Consumables, materials and expendables

Name	Manufacturer / Part No.	Quantity	Remark
Rubbing alcohol	MFR: KZ222 /PN: LL-002	As required	

# **Spares**

### Table 16 Spares

Name	Manufacturer / Part No.	Quantity	Remark
None			_

# **Safety conditions**

None

Produced by Docuneering Ltd

Applicable to: Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)

S1000DBIKE-AAA-D05-20-00-00AA-000A-A



### References

S1000DBIKE-AAA-DA1-10-00-00AA-251A-A

## Equipment

Brake pads

MFR: KT444 /PN: BR-PADS-001

### Limit

Perform periodically Inspection type: Monthly

Limit range: from: 1 Month to: 1 Month

## **Applicability**

Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)



## Task ident: 004

Worthiness limitation: Recommended Task description: Clean the chain

## Preliminary requirements

# **Required conditions**

### Table 17 Required conditions

Action / Condition	Data module / Technical publication
None	

## Required persons

### Table 18 Required persons

Persons	Category	Skill level	Trade/Trade code	Estimated time
Man A	Basic user		Operator	0,25 h

## Support equipment

### Table 19 Support equipment

Name	Manufacturer / Part No.	Quantity	Remark
Stiff bristle brush	MFR: KZ666 /PN: BSK-TLST-001-02	1 EA	
Chain cleaning fluid	MFR: KZ222 /PN: LL-003	As required	
Chain cleaning tool	MFR: KZ666 /PN: BSK-TLST-001-03	1 EA	

# Consumables, materials and expendables

### Table 20 Consumables, materials and expendables

Name	Manufacturer / Part No.	Quantity	Remark
Floor covering	MFR: /PN:	As required	
General lubricant	MFR: KZ222 /PN: LL-001	As required	

# **Spares**

## Table 21 Spares

Name	Manufacturer / Part No.	Quantity	Remark
None			

Applicable to: Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)

S1000DBIKE-AAA-D05-20-00-00AA-000A-A



# **Safety conditions**

None

#### References

S1000DBIKE-AAA-DA4-10-00-00AA-251B-A S1000DBIKE-AAA-D00-00-00-00AA-121A-A

## **Equipment**

- Chain

MFR: KZ555 /PN: Ch-001

#### Limit

Perform periodically Condition: Dirty

1 Month

Inspection type: Monthly

Trigger event

\$1000DBIKE-AAA-D00-00-00-00AA-121A-A



### Task ident: 005

Worthiness limitation: Recommended

Task description: Clean the hub bearings

## Preliminary requirements

## **Required conditions**

### Table 22 Required conditions

Action / Condition	Data module / Technical publication
Rear wheel removed	S1000DBIKE-AAA-DA0-20-00-00AA-520A-A

## Required persons

#### Table 23 Required persons

Persons	Category	Skill level	Trade/Trade code	Estimated time
Man B	Supervisor	Advanced	Bicycle mechanic	0,75 h
Man A	Basic user		Operator	0,25 h

## Support equipment

### Table 24 Support equipment

Name	Manufacturer / Part No.	Quantity	Remark
Specialist toolset	MFR: KZ666 /PN: BSK-TLST-001	1 EA	

# Consumables, materials and expendables

#### Table 25 Consumables, materials and expendables

Name	Manufacturer / Part No.	Quantity	Remark
Degreasing agent	MFR: KZ222 /PN: LL-004	As required	
General grease	MFR: KZ222 /PN: LL-005	As required	

# **Spares**

### Table 26 Spares

Name	Manufacturer / Part No.	Quantity	Remark	
None				



## **Safety conditions**

None

## **Equipment**

- Hubs

MFR: KZ555 /PN: HB-002

## **Supervise**

Supervisor level:.....Low

#### Limit

Perform periodically

6 Month

Inspection type: 6 Monthly

Limit range:

from: 6 Month ± 1

## **Applicability**

Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)





## Scheduled maintenance checks

Table of contents	Page
References	
List of tables	
1 References	1
Ref	ferences
Table <sup>-</sup>	1 References
Data module / Technical publication	Title
S1000DBIKE-AAA-D00-00-00-00AA-121A-A	Bicycle – Pre-operation procedures (crew)

# Inspection definitions

Limits		Applicability
No.	Task	References
•	Perform periodically Condition: Pre-ride Sampling: Pre-ride	
	1 th51 ± 1 Inspection type: Pre	
	Limit range: from: 1 th51 ± 1	
001	Inspect Brakes	S1000DBIKE-AAA-D00-00-00-00AA-121A-A
	To do an inspection of the brakes	
002	Inspect brakes installation	S1000DBIKE-AAA-D00-00-00-00AA-121A-A
	To do an inspection of the brakes installation	
003	Check Tire Pressure	S1000DBIKE-AAA-D00-00-00-00AA-121A-A
	To do a check of the tire pressure	
004	Inspect wheel condition	\$1000DBIKE-AAA-D00-00-00-00AA-121A-A
	To do an inspection of the wheel condition	



(Continued)		
Limits	3	Applicabili
No.	Task	References
005	Check headset bearings	S1000DBIKE-AAA-D00-00-00-00AA-121A-A
	To do a check of the headset bearings	
006	Carry out chain checks	S1000DBIKE-AAA-D00-00-00-00AA-121A-A
	To do a check of the chain	



#### Wheel

# Description of how it is made

Table	of co	ntents		Page
	Refer	encesiption		
	1.1 1.2 1.3	SpokesWheel rim		4 4
List of	f table	es		
	1	References		1
List of	f figui	es		
	1 2 3	The tire and rim		5
			References	
			Table 1 References	
Data mo	dule / 1	Technical publication	Title	
None				

# Description


# 1 The bicycle wheel


The wheel (refer to Fig 1) of a bicycle is a complex structure. The wheel assembly has these parts:

the tire the tube the spokes the spoke nipples the valve the hub



On their own, the individual components are not very strong. But, when they are installed together, the components make the complete wheel (refer to Fig 1). The complete wheel is resistant to almost any type of heavy loads and operation.

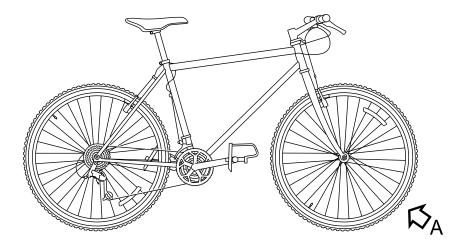

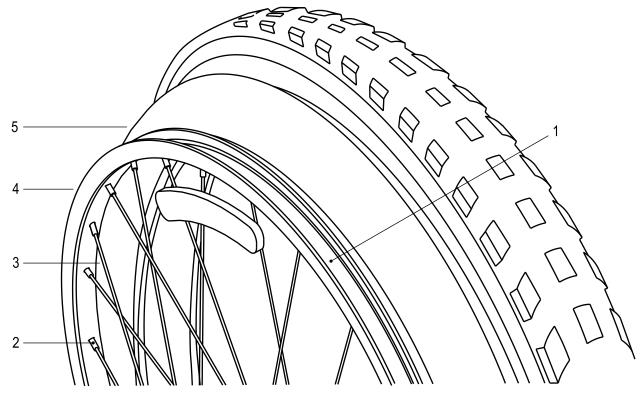

A

ICN-S1000DBIKE-AAA-DA00000-0-U8025-00504-A-04-1

Fig 1 Parts of the wheel





## 1.1 Spokes

The spokes go out from the hub and go across and below each other. The spoke nipples attach the spokes to the rim with the threads on the end of the spokes. You can use the spoke nipples to adjust the tension of the spokes. The tension on each of the spokes must be equal.

#### 1.2 Wheel rim

The rim (refer to Fig 2) of the wheel has a lining of rim tape. This tape protects the tube from damage that the rough edges on the spoke nipples can cause.

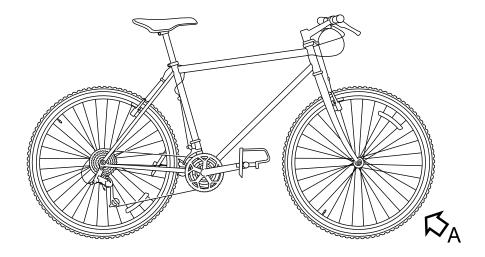

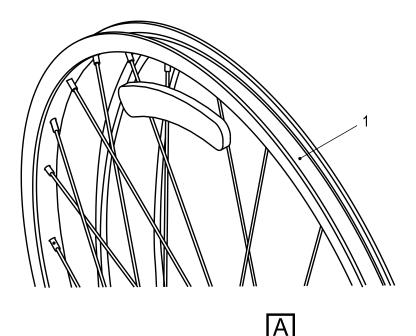

ICN-S1000DBIKE-AAA-DA00000-0-U8025-00504-B-04-1 Fig 2 The tire and rim



#### 1.3 Tube and tire

The tube and the tire install on the rim. The sidewalls of the tire have markings on them. These which are used to indicate the correct direction of rotation. The markings also make sure the tire installs on the rim and that the directional arrows points in the correct direction. You install the tube into the tire before you inflate it. The tube has a valve (refer to Fig 3) which you put through the hole in the rim. This valve (refer to Fig 3) is used to inflate the tube and the tire to the correct pressure. A dust cap installs on the valve (refer to Fig 3) to prevent damage that dust and debris can cause.





## Inner tube

## Remove and install a new item

Table	of co	ontents	Page
	Refe Preli Proc Requ	nove and install a new itemerences	1 1 2
List o	of tab	les	
	1 2 3 4 5 6 7	References Required conditions Required persons Support equipment Consumables, materials and expendables Spares Required conditions	
List o	of figu	ures	
	1	Removing the inner tube	3
		References	
		Table 1 References	
Data m	odule /	/ Technical publication Title	
\$1000	DRIKE-A	$\Delta \Delta \Delta - D \Delta \Omega - 1 \Omega - 2 \Omega - 0 \Omega \Delta \Delta - 2 15 \Delta - \Delta$ Tire — Fill with air	

## Preliminary requirements

# **Required conditions**

#### Table 2 Required conditions

Action / Condition	Data module / Technical publication
The tire is removed.	S1000DBIKE-AAA-DA0-10-20-00AA-215A-A



## **Required persons**

#### Table 3 Required persons

Persons	Category	Skill level	Trade/Trade code	Estimated time
Man A	Basic user		Operator	0,25 h

## Support equipment

#### Table 4 Support equipment

Name	Manufacturer / Part No.	Quantity	Remark
None			

# Consumables, materials and expendables

#### Table 5 Consumables, materials and expendables

Name	Manufacturer / Part No.	Quantity	Remark
None			

## **Spares**

#### Table 6 Spares

Name	Manufacturer / Part No.	Quantity	Remark
Inner tube	MFR: KT222 /PN: IT-001	1 EA	


# Safety conditions


#### **CAUTION**

Be careful with sharp or hard tools. They can cause damage to the inner tube.

#### **Procedure**

1 Remove the old inner-tube.

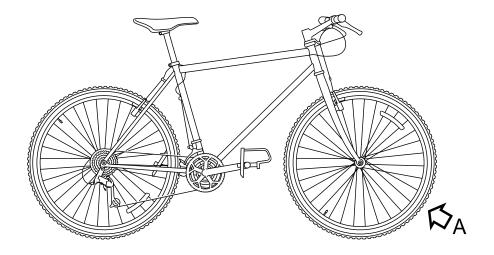

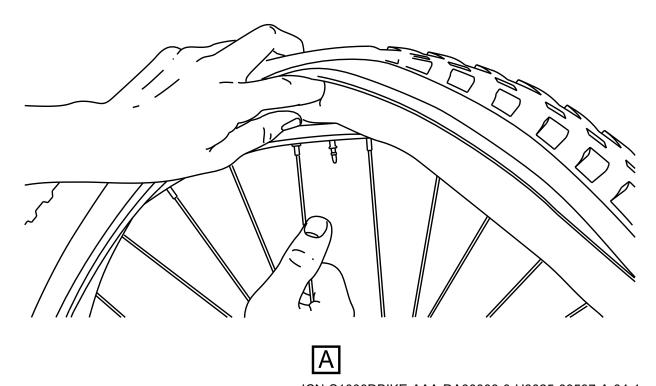

ICN-S1000DBIKE-AAA-DA00000-0-U8025-00507-A-04-1 Fig 1 Removing the inner tube

2 Install the new Inner tube.



# Requirements after job completion

# **Required conditions**

Table 7 Required conditions

Action / Condition	Data module / Technical publication
Replace the tire.	
Inflate the tire with air.	S1000DBIKE-AAA-DA0-10-20-00AA-215A-A



#### **Tire**

## Fill with air

Table of	f contents	Page
j	Fill with air	1
	References	
I	Preliminary requirements	1
ļ	Procedure	2
I	Requirements after job completion	3
List of t	tables	
	1 References	1
2	2 Required conditions	1
;	3 Required persons	1
4	4 Support equipment	
	5 Consumables, materials and expendables	2
(	6 Spares	2
•	7 Required conditions	3
	References	
	Table 1 References	
Data mod	ule / Technical publication Title	
None		

# Preliminary requirements

# **Required conditions**

#### Table 2 Required conditions

Action / Condition	Data module / Technical publication
None	

# **Required persons**

#### Table 3 Required persons

Persons	Category	Skill level	Trade/Trade code	Estimated time
Man A	Basic user		Operator	0,25 h

Applicable to: Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)

S1000DBIKE-AAA-DA0-10-20-00AA-215A-A



## Support equipment

Table 4 Support equipment

Name	Manufacturer / Part No.	Quantity	Remark
Specialist toolset	MFR: KZ666 /PN: BSK-TLST-001	1 EA	
Foot pump	MFR: KZ666 /PN: BSK-TLST-001-05	1 EA	
Tire pressure gauge	MFR: KZ666 /PN: BSK-TLST-001-01	1 EA	

# Consumables, materials and expendables

Table 5 Consumables, materials and expendables

Name	Manufacturer / Part No.	Quantity	Remark
None			

## **Spares**

#### Table 6 Spares

Name	Manufacturer / Part No.	Quantity	Remark
None			

# **Safety conditions**

None

#### **Procedure**

- 1 Ensure bicycle is on the repair stand.
- 2 Locate the deflated tire.
- Attach the outlet valve of the Foot pump, from the Specialist toolset, to the valve of the deflated tire.
- 4 Inflate the tire.
- 4.1 Operate the foot pump to pump air into the tire.
- 4.2 Check tire pressure. Refer to \$1000DBIKE-AAA-DA0-10-20-00AA-362B-A.



# Requirements after job completion

# **Required conditions**

Table 7 Required conditions

Action / Condition	Data module / Technical publication
None	





#### Tire

# Check pressure

Table	of co	ontents	Page
		eck pressure	
		erences	
	Preli	liminary requirements	1
		cedure	
	Real	quirements after job completion	3
List o	f tab		
	1	References	1
	2	Required conditions	1
	3	Required persons	
	4	Support equipment	
	5	Consumables, materials and expendables	2
	6	Spares	2
	7	Required conditions	
		·	

#### References

#### Table 1 References

Data module / Technical publication	Title
S1000DBIKE-AAA-DA0-10-20-00AA-215A-A	Tire – Fill with air
S1000DBIKE-AAA-DA0-10-10-00AA-921A-A	Inner tube – Remove and install a new item

# Preliminary requirements

# **Required conditions**

#### Table 2 Required conditions

Action / Condition	Data module / Technical publication
None	



## Required persons

## Table 3 Required persons

Persons	Category	Skill level	Trade/Trade code	Estimated time
Man A	Basic user		Operator	0,25 h

## Support equipment

#### Table 4 Support equipment

Name	Manufacturer / Part No.	Quantity	Remark
Tire pressure gauge	MFR: KZ666 /PN: BSK-TLST-001-01	1 EA	

## Consumables, materials and expendables

#### Table 5 Consumables, materials and expendables

Name	Manufacturer / Part No.	Quantity	Remark
None			

## **Spares**

#### Table 6 Spares

Name	Manufacturer / Part No.	Quantity	Remark
None			

# Safety conditions

None

#### **Procedure**

- 1 Locate the valve stem of tire.
- 2 Use the tire pressure gauge (Tire pressure gauge) to check the tire pressure.
- Tire pressure should between 2000 hPa to 2700 hPa.
- 3.1 If tire pressure is less than 2000 hPa inflate tire. Refer to \$1000DBIKE-AAA-DA0-10-20-00AA-215A-A.
- 3.2 If the tire cannot maintain pressure or the tire pressure is greater than 2700 hPa replace the inner tube. Refer to \$1000DBIKE-AAA-DA0-10-10-00AA-921A-A.

3.1 3.2 Applica



# Requirements after job completion

# **Required conditions**

Table 7 Required conditions

Action / Condition	Data module / Technical publication
None	





## Front wheel

# Fault reports and isolation procedures

## **Fault codes**

Fault code	Fault description
NYCJD04	Tire does not function correctly

Table of	T CONTENTS	Page
	Fault reports and isolation procedures	
	References Preliminary requirements	

#### List of tables

1	References	1
2		
3	Support equipment	
	Consumables, materials and expendables	
	Spares	

## References

#### Table 1 References

Data module / Technical publication	Title	
S1000DBIKE-AAA-DA0-10-20-00AA-215A-A	Tire – Fill with air	
S1000DBIKE-AAA-DA0-10-20-00AA-921A-A	Tire – Remove and install a new item	
S1000DBIKE-AAA-DA0-10-10-00AA-921A-A	Inner tube – Remove and install a new item	

# Fault isolation procedure

## Fault code

NYCJD04

# **Fault description**

Tire does not function correctly



# Preliminary requirements

## **Required conditions**

#### Table 2 Required conditions

Action / Condition	Data module / Technical publication	
None		

# **Support equipment**

#### Table 3 Support equipment

Name	Manufacturer / Part No.	Quantity	Remark
Tire pressure gauge	MFR: KZ666 /PN: BSK-TLST-001-01	1 EA	
Specialist toolset	MFR: KZ666 /PN: BSK-TLST-001	1 EA	

# Consumables, materials and expendables

#### Table 4 Consumables, materials and expendables

Name Manufacturer / Part No.		Quantity	Remark
None			

# **Spares**

#### Table 5 Spares

Name	Manufacturer / Part No.	Quantity	Remark
None			

# **Safety conditions**

None

# Isolation procedure

1	Use the tire pressure gauge (Tire pressure gauge) to do a check of the pressure
	What is the tire pressure reading?
1.1	More than 2700 hPa Step 2
1.2	Between 100 hPa and 2700 hPa Step 3
1.3	Less than 100 hPa Step 4

Produced by Docuneering Ltd

Applicable to: Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)



2	Deflate the tire until the pressure is 2700 hPa
	Go to requirements after job completion
3	Inflate the tire as given in \$1000DBIKE-AAA-DA0-10-20-00AA-215A-A
	Go to requirements after job completion
4	To do a check of the tire for damage
	Is there damage to the tire?
4.1	Yes: Go to Step 5
4.2	No: Go to Step 6
5	Replace the tire (refer to S1000DBIKE-AAA-DA0-10-20-00AA-921A-A)
	Go to requirements after job completion
6	Replace the inner-tube (refer to S1000DBIKE-AAA-DA0-10-10-00AA-921A-A)
	Go to requirements after job completion





#### **Tire**

## Remove and install a new item

Table (	of co	ontents	Page
		nove and install a new item	
	Refe	erences	
	Prelii	minary requirements	1
		edure	
		uirements after job completion	
l !-4 -£	: 4 - I- I		
List of	tabi	les	
	1	References	1
	2	Required conditions	
	3	Required persons	2
	4	Support equipment	2
	5	Consumables, materials and expendables	2
	6	Spares	
	7	Required conditions	3
		References	

# Table 1 References

# Data module / Technical publication Title S1000DBIKE-AAA-DA1-00-00-00AA-341A-A Brake system – Manual test

Tire - Fill with air

# Preliminary requirements

# **Required conditions**

S1000DBIKE-AAA-DA0-10-20-00AA-215A-A

#### Table 2 Required conditions

Action / Condition	Data module / Technical publication	
None		



## **Required persons**

#### Table 3 Required persons

Persons	Category	Skill level	Trade/Trade code	Estimated time
Man A	Basic user		Operator	0,25 h

## Support equipment

#### Table 4 Support equipment

Name	Manufacturer / Part No.	Quantity	Remark
Specialist toolset	MFR: KZ666 /PN: BSK-TLST-001	1 EA	
Tire lever	MFR: KZ666 /PN: BSK-TLST-001-04	1 EA	
Tire pressure guage	MFR: KZ666 /PN: BSK-TLST-001-01	1 EA	

## Consumables, materials and expendables

#### Table 5 Consumables, materials and expendables

Name	Manufacturer / Part No.	Quantity	Remark
None			

## **Spares**

#### Table 6 Spares

Name	Manufacturer / Part No.	Quantity	Remark
Tire	MFR: KT666 /PN: TIRES-010101	1 EA	

# Safety conditions

None

#### **Procedure**

- 1 Lift and turn the bicycle and make sure the bicycle is held safely in this position.
- 2 Use a standard wrench from the Specialist toolset and loosen the brake caliper.
- 3 Remove the axle bolt.
- 4 Remove the wheel.
- 5 Deflate the tire.

Produced by Docuneering Ltd

Applicable to: Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)



6	Use the Tire lever from the Specialist toolset and remove the old tire from the wheel.
7	Use the Tire lever from the Specialist toolset and attach the new Tire to the wheel. Refer to S1000DBIKE-AAA-DA0-10-20-00AA-041A-A.
8	Inflate the tire (refer to S1000DBIKE-AAA-DA0-10-20-00AA-215A-A).
9	Install the wheel.
10	Tighten the axle bolt.
11	Tighten the brake caliper.

# Requirements after job completion

# **Required conditions**

Table 7 Required conditions

Action / Condition	Data module / Technical publication
Lift and turn the bicycle to the correct position.	
Do a test of the brakes as given in the brake test procedure.	S1000DBIKE-AAA-DA1-00-00-00AA-341A-A

**UNCLASSIFIED** 





## Rear wheel

## **Detected fault**

## **Fault codes**

Fault code F	ault description		
NYCJD00 T	The rear wheel does not operate correctly		
Table of contents	Pε	age	
References		1 1	
List of tables			
1 Referenc	es	1	
	References		
	Table 1 References		
Data module / Technical pu	ublication Title		
None			

# Fault reporting

## Fault code

NYCJD00

# **Fault description**

The rear wheel does not operate correctly

## **Fault detection**

Type: Major



#### 1 **Detected LRU**

Line replaceable unit

Nomenclature	Identification
Tire	MFR: KT666/PN: TIRES-010101

## Isolate detected fault

#### Fault isolation test - LRU 1

Line replaceable unit

Nomenclature	Identification
Rear wheel	MFR: KZ333/PN: WH-001

## **Remarks**

Prepare the rear wheel for the removal of the tire



## Rear wheel

# Remove procedures

Table of	contents	Page
R	emove procedures	
	eferences	
P	reliminary requirements	
	rocedure	
R	equirements after job completion	2
List of ta	ables	
1	References	
2	Required conditions	
3	Required persons	
4	Support equipment	
5	Consumables, materials and expendables	
6	Spares	
7	Required conditions	
	References	
	Table 1 References	
Data modul	le / Technical publication Title	
None		

# Preliminary requirements

# **Required conditions**

#### Table 2 Required conditions

Action / Condition	Data module / Technical publication
None	

# **Required persons**

#### Table 3 Required persons

Persons	Category	Skill level	Trade/Trade code	Estimated time
As required				

Applicable to: Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)

S1000DBIKE-AAA-DA0-20-00-00AA-520A-A



## Support equipment

#### Table 4 Support equipment

Name	Manufacturer / Part No.		Remark
None			

# Consumables, materials and expendables

#### Table 5 Consumables, materials and expendables

Name	Manufacturer / Part No.	Quantity	Remark
None			

## **Spares**

#### Table 6 Spares

Name	Manufacturer / Part No.	Quantity	Remark
None			_

## **Safety conditions**

None

#### **Procedure**

- 1 Hold the rear of the bicycle.
- 2 Push the wheel forwards and down to disengage the chain from the sprocket.
- Turn the wheel to the side and lift it away from the frame.
- 4 Put the frame on the floor.

# Requirements after job completion

# Required conditions

#### Table 7 Required conditions

Action / Condition	Data module / Technical publication
None	



## **Brake system**

## Description of how it is made

Table	able of contents			
	Description of how it is made			
		rencescription		
	1	Brake system	1	
	1.1	Cantilever brake		
	1.2 1.3	Brake pads Brake lever		
	1.5	Diane level	······································	
List of	f tabl	es		
	1	References	1	
List of	f figu	ıres		
	1	Cantilever brake with straddle cable	3	
	2	Exploded diagram of a brake	5	
	3	Typical components of a mountain bicycle lever	7	
		References		
		Table 4 Deferences		
		Table 1 References		
Data mo	odule /	Technical publication Title	_	
None				

## Description

## 1 Brake system

The most important part of the bicycle is the brake system. Only a minimum maintenance of the brake system is necessary. But, when a problem does occur, make sure you to do the necessary maintenance as quickly as possible. If you do not do this the bicycle will be dangerous to use.

There are nine different types of brake systems. The one found on most bicycles is the cantilever brake (refer to Para 1.1).

#### 1.1 Cantilever brake

The brake system (refer to Fig 1) has these primary components:


the brake lever (refer to Para 1.3)

Produced by Docuneering Ltd

Applicable to: Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)



the brake cable the brake arm the brake clamp (also known as callipers) the brake pads (refer to Para 1.2)

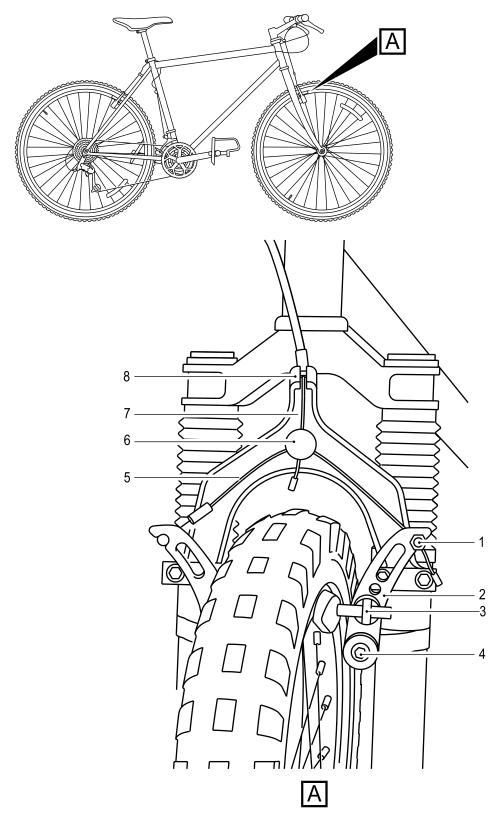

ICN-S1000DBIKE-AAA-DA10000-0-U8025-00512-A-04-1


Fig 1 Cantilever brake with straddle cable




A cable that goes from the brake levers on the handlebars pulls the two levers on the brakes together. This presses the brake pads against the outer rim of the wheel, which decreases the speed of the bicycle.

#### 1.2 Brake pads

There are four brake pads (refer to Fig 2) on the bicycle. Two are found on the front wheel and two on the rear wheel. The brake pads are made out of hard wearing rubber. The pads press against the rim of the wheel to cause friction when the you operate the brake levers.

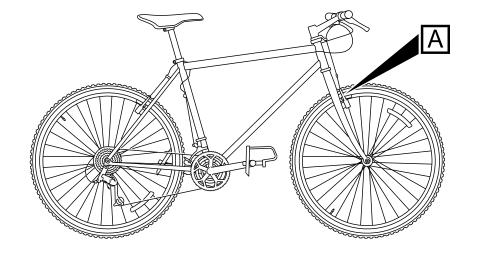

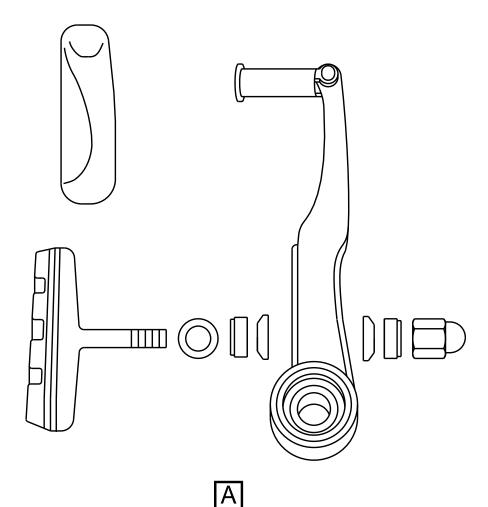


ICN-S1000DBIKE-AAA-DA10000-0-U8025-00513-A-04-1


Fig 2 Exploded diagram of a brake



### 1.3 Brake lever

The brake levers (refer to Fig 3) are easily damaged. The lever is installed in the mount. A clamp bolt holds the mount. This bolt is not visible because it is found in the mount. The lever turns on a lever pivot bolt. The adjuster lock nut holds the brake cable. This lock nut adjusts the tension of the cable.

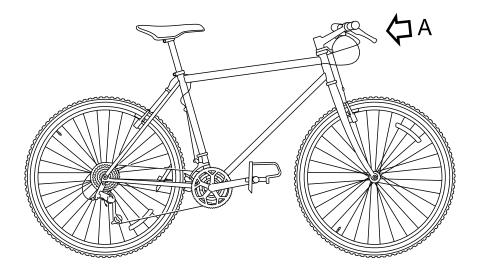

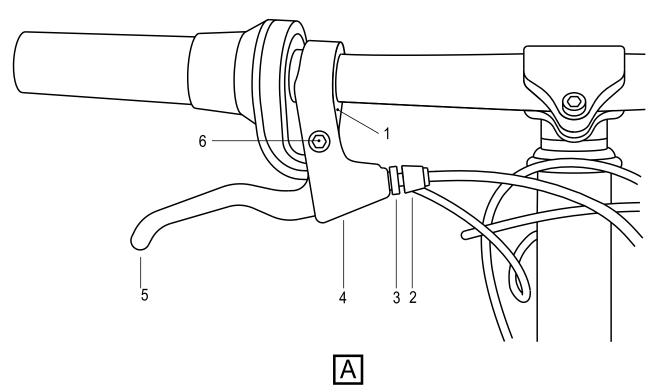

ICN-S1000DBIKE-AAA-DA10000-0-U8025-00514-A-04-1

Fig 3 Typical components of a mountain bicycle lever





The left brake lever holds the brake pads on the front wheel and the right brake pads hold the brakes on the rear wheel.



# **Brake system**

### Manual test

Table	ot co	ntents	Page
List o	Refero Prelim Proce Requi	rences	1 1 2
List	1 2 3 4 5 6 7	References	1 
		References	
Data		Table 1 References	
None	paule /	Technical publication Title	

# Preliminary requirements

# **Required conditions**

### Table 2 Required conditions

Action / Condition	Data module / Technical publication
None	

# **Required persons**

### Table 3 Required persons

Persons	Category	Skill level	Trade/Trade code	Estimated time
Man A	Basic user		Operator	0,25 h

Applicable to: Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)

S1000DBIKE-AAA-DA1-00-00-00AA-341A-A



### Support equipment

#### Table 4 Support equipment

Name	Manufacturer / Part No.	Quantity	Remark
None			

# Consumables, materials and expendables

#### Table 5 Consumables, materials and expendables

Name	Manufacturer / Part No.	Quantity	Remark
None			

### **Spares**

#### Table 6 Spares

Name	Manufacturer / Part No.	Quantity	Remark
None			

### **Safety conditions**

None

### **Procedure**

- 1 Put the bicycle in a vertical position.
- 2 Hold the handle bars and push the bicycle forwards.
- 3 Apply the brakes.
- 4 Make sure that the wheels lock and the bicycle stops.

# Requirements after job completion

# Required conditions

#### Table 7 Required conditions

Action / Condition	Data module / Technical publication
None	



# **Brake pads**

# Clean with rubbing alcohol

Table of	of contents	Page
liot of	Clean with rubbing alcohol References Preliminary requirements Procedure Requirements after job completion	
LIST OF	f tables	
	1 References	1
	2 Required conditions	
	3 Required persons	
	4 Support equipment	2
	5 Consumables, materials and expendables	
	6 Spares	2
	7 Required conditions	
	References	
	Table 1 References	
Data mo	odule / Technical publication Title	
\$1000DE	NRIKE AAA DOO OO OO AA 121A A Biovolo Bro	poration procedures (erow)

# Preliminary requirements

# **Required conditions**

### Table 2 Required conditions

Action / Condition	Data module / Technical publication
None	

# **Required persons**

### Table 3 Required persons

Persons	Category	Skill level	Trade/Trade code	Estimated time
Man A	Basic user		Operator	0,25 h

Produced by Docuneering Ltd Applicable to: Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)

S1000DBIKE-AAA-DA1-10-00-00AA-251A-A



### Support equipment

#### Table 4 Support equipment

Name	Manufacturer / Part No.	Quantity	Remark
None			

### Consumables, materials and expendables

#### Table 5 Consumables, materials and expendables

Name	Manufacturer / Part No.	Quantity	Remark
Rubbing alcohol	MFR: KZ222 /PN: LL-002	As required	

### **Spares**

#### Table 6 Spares

Name	Manufacturer / Part No.	Quantity	Remark
None			

# Safety conditions

None

#### **Procedure**

- Do a visual inspection of the brakes as given in the pre-ride checks (refer to \$1000DBIKE-AAA-D00-00-00AA-121A-A).
- 2 Clean the brake pads.
- 2.1 Find each of the brake pads.
- 2.2 Apply a thin layer of the Rubbing alcohol on each of the brake pads.
- 2.3 Rub the surface until you have applied the Rubbing alcohol to the complete surface of the pad.
- 2.4 Remove the unwanted alcohol.



# Requirements after job completion

# **Required conditions**

Table 7 Required conditions

Action / Condition	Data module / Technical publication
None	





# **Steering**

# Description of how it is made

Table of	contents	Page
D	Description of how it is made	1
R	References	1
D	Description	
1	Steering	1
1	.1 Handlebar	
1	.2 Headset	
1	.3 Stem	2
List of ta	ables	
1	References	1

#### References

#### Table 1 References

Data module / Technical publication	Title
S1000DBIKE-AAA-DA2-20-00-00AA-520A-A	Handlebar – Remove procedures
S1000DBIKE-AAA-DA2-20-00-00AA-720A-A	Handlebar – Install procedures
S1000DBIKE-AAA-DA2-30-00-00AA-041A-A	Headset – Description of how it is made
S1000DBIKE-AAA-DA2-30-00-00AA-520A-A	Headset – Remove procedures
S1000DBIKE-AAA-DA2-30-00-00AA-720A-A	Headset – Install procedures
S1000DBIKE-AAA-DA2-10-00-00AA-520A-A	Stem – Remove procedures
S1000DBIKE-AAA-DA2-10-00-00AA-720A-A	Stem – Install procedures

# Description

# 1 Steering

The steering on the bike is what enables the bike to manoeuvre in a given direction during travel. The steering system on the bike is made of three parts, they are:

Para 1.1The handlebar Para 1.2The headset Para 1.3The stem



#### 1.1 Handlebar

This consists of a horizontal bar attached to the stem with handgrips at the end. Brake levers and shifters are also attached to this bar although they do not have any part in the steering mechanism. The handlebars manoeuvrability is a sideways swivelling action. The handlebars themselves do not provide this swivelling, the headset (also known as the steering tube) is the mechanism that enables the handlebars to swivel.

#### 1.2 Headset

This mechanism is situated in front of the frame and connects the front fork to the stem and handlebars. The headset allows the handlebars to swivel left and right for steering purposes.

For a full description of the headset, refer to S1000DBIKE-AAA-DA2-30-00-00AA-041A-A.

#### 1.3 Stem

The stem is a piece that attaches the handlebar to the steering tube. Basically the stem is just a threaded stem bolt situated inside the steerer tube and is what attaches the handlebars to the headset.



### **Stem**

# Remove procedures

Table of	of co	ntents	Page
	Refer Prelin Proce Requ	ences ninary requirementsedure irements after job completion	
List of	table	es	
	1 2 3 4 5 6 7	Required conditions	xpendables
List of	figu	res	
	1	Remove the bolt	
		Ret	ferences
		Table	1 References
Data mo	dule /	Technical publication	Title
S1000DE	BIKE-A	AA-DA2-20-00-00AA-520A-A	Handlebar – Remove procedures

# Preliminary requirements

# **Required conditions**

### Table 2 Required conditions

Action / Condition	Data module / Technical publication
Safety the bicycle in a bicycle stand and hold the front wheel off the ground	



### **Required persons**

#### Table 3 Required persons

Persons	Category	Skill level	Trade/Trade code	Estimated time
Man A	Bike Rider	Intermediate	Operator	1,5 h

### Support equipment

#### Table 4 Support equipment

Name	Manufacturer / Part No.	Quantity	Remark
Set of Allen wrenches	MFR: KZ666 /PN: BSK-TLST-001-13	1 EA	
Work stand	MFR: KZ555 /PN: Stand-001	1 EA	

### Consumables, materials and expendables

#### Table 5 Consumables, materials and expendables

Name	Manufacturer / Part No.	Quantity	Remark
None			

### **Spares**

#### Table 6 Spares

Name	Manufacturer / Part No.	Quantity	Remark
None			


# **Safety conditions**


#### **NOTE**

It is not necessary to remove the handlebar when you remove the stem to get access to the headset.

### **Procedure**

- 1 Remove the handlebar S1000DBIKE-AAA-DA2-20-00-00AA-520A-A.
- 2 Remove the stem.
- 2.1 Remove the bolt in the center of the stem cap.

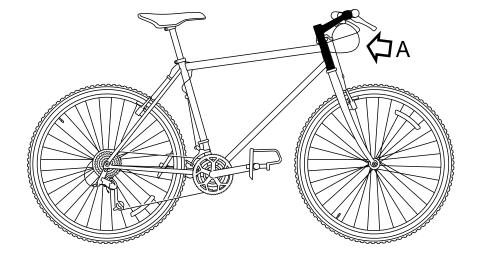

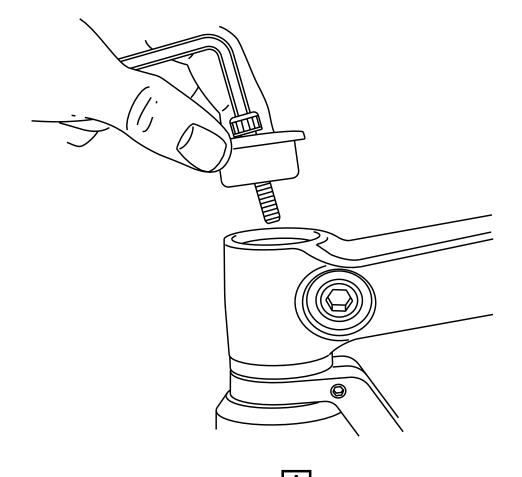

ICN-S1000DBIKE-AAA-DA21000-0-U8025-00531-A-04-1

Fig 1 Remove the bolt



- 2.2 Loosen the stem clam bolt with a Set of Allen wrenches.
- 2.3 Remove the stem from the steerer tube.
- 2.4 Note: It is not necessary to remove the handlebar if you remove the stem to get access to the

### Requirements after job completion

# **Required conditions**

### Table 7 Required conditions

Action / Condition	Data module / Technical publication	
None		



### **Stem**

# Install procedures

Table	of co	ontents		Page
		1 1 3		
List	of tab	les		
	1	References		1
	2			
	3			
	4	Support equipment		2
	5		expendables	
	6	Spares		2
	7	Required conditions		7
List	of figu	ires		
	1	Lubricate the thread		4
	2			
		Re	ferences	
		Table	1 References	
Data m	nodule /	Technical publication	Title	
S1000I	DBIKE-A	AAA-DA2-20-00-00AA-720A-A	Handlebar – Install procedures	

# Preliminary requirements

# **Required conditions**

### Table 2 Required conditions

Action / Condition	Data module / Technical publication
Make sure the bicycle is held safely on a work stand with the front wheel free of the ground	



### Required persons

#### Table 3 Required persons

Persons	Category	Skill level	Trade/Trade code	Estimated time
Man A	Bike Rider	Intermediate	Operator	1,0 h

### Support equipment

#### Table 4 Support equipment

Name	Manufacturer / Part No.	Quantity	Remark
Clean dry cloth	MFR: KZ666 /PN: BSK-TLST-001-12	1 EA	
Work stand	MFR: KZ555 /PN: Stand-001	1 EA	

### Consumables, materials and expendables

#### Table 5 Consumables, materials and expendables

Name	Manufacturer / Part No.	Quantity	Remark
Rubbing alcohol	MFR: KZ222 /PN: LL-002	1 L	
General lubricant	MFR: KZ222 /PN: LL-001	1 L	

### **Spares**

#### Table 6 Spares

Name	Manufacturer / Part No.	Quantity	Remark
Stem	MFR: KZ555 /PN: St-001	1 EA	
Stem bolt	MFR: KZ555 /PN: St-001-01	1 EA	

# Safety conditions

#### **CAUTION**

Do not tighten the stem bolt too much. You can cause damage to the headset bearings if you tighten the stem too much.

### **CAUTION**

The stem bolt does not safety the stem.





#### **NOTE**

The stem must point forward in alignment with the wheel.

### **Procedure**

- 1 Remove all the rust and the corrosion with a Clean dry cloth and Rubbing alcohol.
  - 2 Install the stem.
- 2.1 Use a General lubricant and lubricate:
  - the threads of the Stem and Stem bolt
  - the sides
  - the top of the wedge

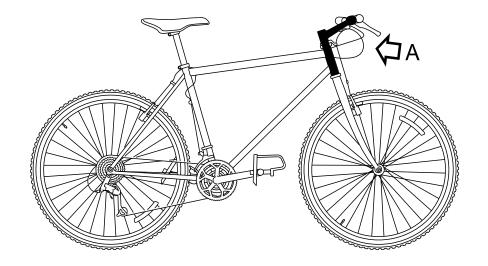

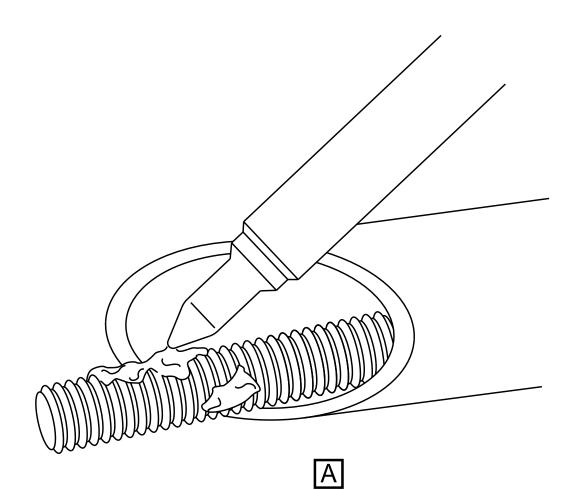



ICN-S1000DBIKE-AAA-DA21000-0-U8025-00529-A-04-1

Fig 1 Lubricate the thread



2.2 Install the Stem in the steerer tube.

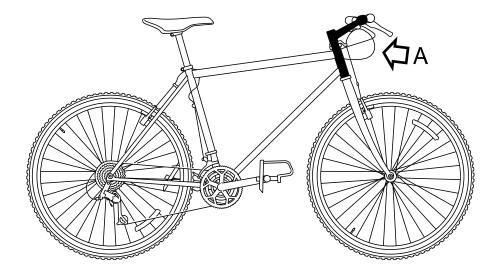

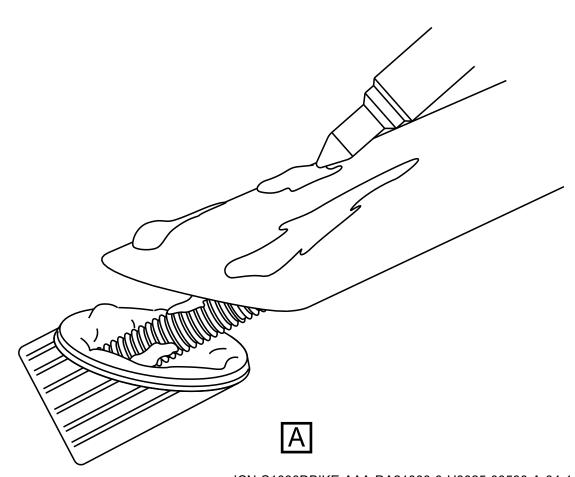

ICN-S1000DBIKE-AAA-DA21000-0-U8025-00530-A-04-1 Fig 2 Tighten the bolt

Applicable to: Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)

S1000DBIKE-AAA-DA2-10-00-00AA-720A-A



- 2.3 Adjust to align the Stem with the wheel and tighten the Stem bolt firmly.
  - 3 Install the handlebars (refer to \$1000DBIKE-AAA-DA2-20-00-00AA-720A-A).

### Requirements after job completion

# **Required conditions**

#### Table 7 Required conditions

Action / Condition	Data module / Technical publication
None	





### Handlebar

# Remove procedures

Table	of co	ontents	Page
1.24	Refe Preli Proc Requ	nove procedures erences minary requirements edure uirements after job completion	1 1 2
List of	tab	les	
	1	References	
	2	Required conditions	
	3	Required persons	
	4	Support equipment	
	5	Consumables, materials and expendables	
	6 7	Spares Required conditions	
List of	figu	ıres	
	1	Loosen the clamp screw with the Allen wrench	4
	2	Loosen the clamp bolt	
		References	
		Table 1 References	
Data mo	dule /	Technical publication Title	
None			

# Preliminary requirements

# **Required conditions**

Table 2 Required conditions

Action / Condition	Data module / Technical publication
The bicycle is held safely on a work stand.	



### Required persons

### Table 3 Required persons

Persons	Category	Skill level	Trade/Trade code	Estimated time
Man A	Bike rider	Intermediate	Operator	1,5 h

### Support equipment

#### Table 4 Support equipment

Name	Manufacturer / Part No.	Quantity	Remark
Set of Allen wrenches	MFR: KZ666 /PN: BSK-TLST-001-13	1 EA	
Work stand	MFR: KZ555 /PN: Stand-001	1 EA	

### Consumables, materials and expendables

### Table 5 Consumables, materials and expendables

Name	Manufacturer / Part No.	Quantity	Remark
None			

### **Spares**

#### Table 6 Spares

Name	Manufacturer / Part No.	Quantity	Remark
None			

# **Safety conditions**

### **WARNING**

Do not ride a bicycle with no grips on the handlebar. This can cause the hands of the rider to slip.


### **Procedure**


# 1 Remove the grips

- 1.1 Put a long thin screwdriver below the grip and apply water between the grip and the handle bar.
- 1.2 Turn the grip forwards and rearwards to loosen it and then pull it off the end of the handlebar.
- 2 Remove the brake and the shift levers from the handlebars



2.1 Loosen the clamp screw (refer to Fig 1) which is behind or below the brake lever (as shown).

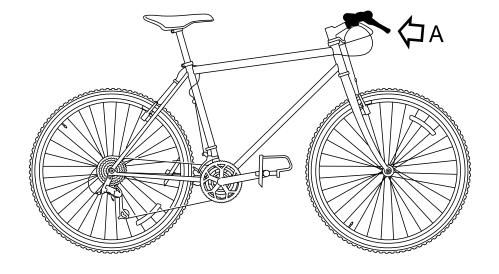

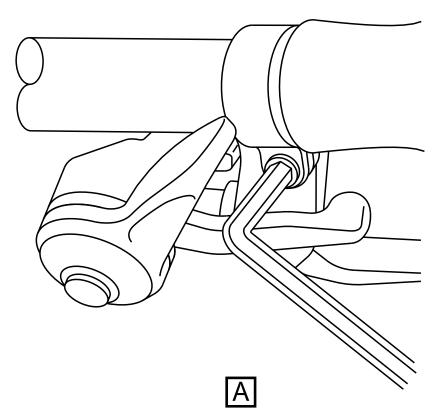

ICN-S1000DBIKE-AAA-DA22000-0-U8025-00518-A-04-1

Fig 1 Loosen the clamp screw with the Allen wrench





- 2.2 Remove the lever and the mount from the handlebar.
- 2.3 Loosen the clamp bolt and remove the shifter from the handlebar.

### 3 Remove the handlebar

This is a dummy paragraph, inserted only for Svante's strang requests.

Use a Set of Allen wrenches and loosen the clamp bolt (refer to Fig 2 ). To remove, move the handlebar out of the stem.

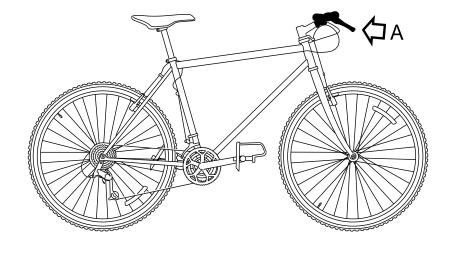

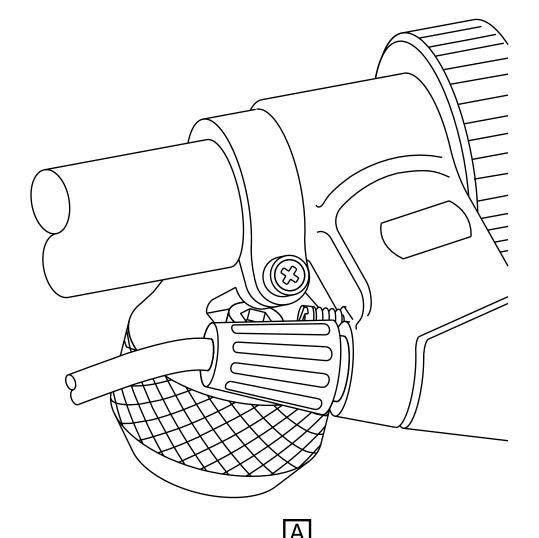

 $\label{local-equation} ICN-S1000DBIKE-AAA-DA22000-0-U8025-00517-A-04-1 \\ \textit{Fig 2 Loosen the clamp bolt}$ 

S1000DBIKE-AAA-DA2-20-00-00AA-520A-A



# Requirements after job completion

# **Required conditions**

Table 7 Required conditions

Action / Condition	Data module / Technical publication
None	





### Handlebar

# Install procedures

Table o	of contents	Page
	Install procedures  References  Preliminary requirements  Procedure  Requirements after job completion	
List of t	tables	
	1 References	
	References	
	Table 1 References	
Data mod	dule / Technical publication Title	
None		

# Preliminary requirements

# **Required conditions**

#### Table 2 Required conditions

Action / Condition	Data module / Technical publication
The bicycle is held safely on work stand. Refer to (Work stand)	

# Required persons

Produced by Docuneering Ltd

### Table 3 Required persons

Persons	Category	Skill level	Trade/Trade code	Estimated time
Man A	Bike rider	Intermediate	Operator	1,5 h

Applicable to: Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)

S1000DBIKE-AAA-DA2-20-00-00AA-720A-A



### Support equipment

Table 4 Support equipment

Name	Manufacturer / Part No.	Quantity	Remark
Set of Allen wrenches	MFR: KZ666 /PN: BSK-TLST-001-13	1 EA	
Extra firm hold hairspray	MFR: HS111 /PN: HSP-D001	1 EA	
Work stand	MFR: KZ555 /PN: Stand-001	1 EA	

### Consumables, materials and expendables

Table 5 Consumables, materials and expendables

Name	Manufacturer / Part No.	Quantity	Remark
None			

### **Spares**

Table 6 Spares

Name	Manufacturer / Part No.	Quantity	Remark
Handlebar	MFR: KZ555 /PN: Hd-001	1 EA	
Brake lever	MFR: KT444 /PN: BR-LVRS-001	1 EA	
Shifter lever	MFR: KZ555 /PN: SI-001	1 EA	
Brake lever mount	MFR: KT444 /PN: BR-LVRS-001-01	1 EA	
Handlebar grips	MFR: KZ555 /PN: Hd-001-01	1 EA	
Handlebar plug	MFR: KZ555 /PN: Hd-001-02	1 EA	

# **Safety conditions**

### **WARNING**

Do not ride the bicycle until the grips have become dry and are firmly held in position. If the grips are wet, your hands can move off the grips when you ride the bicycle.

### **WARNING**

Do not ride a bicycle with no grips on the handlebar.

#### **CAUTION**

Make sure the handlebar is correctly aligned in the center of the stem.



### **Procedure**

Put the Handlebar in the stem and tighten the clamp bolt with a Set of Allen wrenches. Make sure the handlebar is correctly aligned in the center of the stem. Tighten the clamp bolt. 2 Put the Brake lever and Shifter lever on the handlebar. 2.1 Move the Shifter lever on the Handlebar again and make sure you do not catch the cables. Tighten the clamp bolt. 2.2 2.3 Move the Brake lever mount and the brake lever on the Handlebar again. 2.4 Tighten the clamp screw. 3 Replace the Handlebar grips. 3.1 Apply with the Extra firm hold hairspray to the Handlebar grips area of the Brake lever mount. Before the Extra firm hold hairspray becomes dry, move the Handlebar grips into the correct

### Requirements after job completion

position. Make sure the grip protects the end of the Handlebar or install a Handlebar plug.

### Required conditions

#### Table 7 Required conditions

Action / Condition	Data module / Technical publication	
None		





#### Headset

## Description of how it is made

lable of contents		Page
References Description		1
List of tables		
1 References		1
List of figures		
1 Headset		3
	References	
	Table 1 References	
Data module / Technical publication	Title	
None		

## **Description**

#### 1 Headset

The headset (refer to Fig 1) is a pair of bearings on the two ends of the head tube of the frame. These bearings permit the fork to turn rearward and forward (for example, to let the rider turn the handlebars for the steering).

The headset (refer to Fig 1) includes the parts that follow:

The bearing races that push into the head tube a bearing race that pushes on the fork steerer tube an adjustable upper race two sets of ball bearings

A headset has cups that are pushed into the head tube and a ring on the fork. All three must be fully parallel. It is usually necessary to remove rough paint to get all three fully parallel.


The upper race installs onto the steerer tube with a thread. A locknut is used to safety the upper race.


A clamp bolt holds the stem to the steerer tube.



The fourth remaining bearing race is part of a nut that installs on the threaded top end of the fork. This is done after you install it in the head tube. It is sometimes necessary for some headsets to have more thread at the top of the head tube. If the fork is too long, the spacer rings can be installed. If it is too short, there is a limit to the number of headsets you can use.

For an illustration of the parts of the headset (refer to Fig 1).

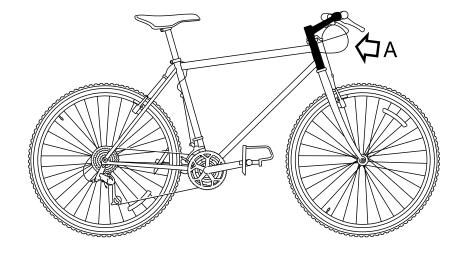

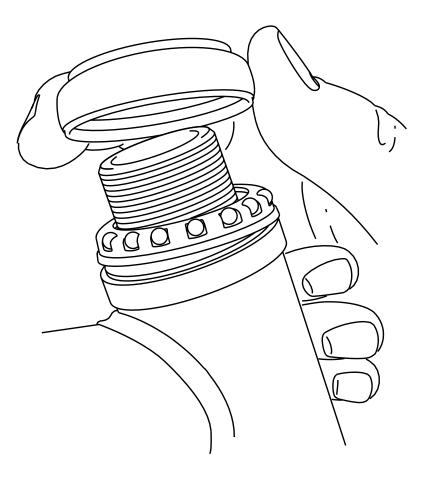



ICN-S1000DBIKE-AAA-DA23000-0-U8025-00533-A-04-1

1 Headset





## **Headset**

## Remove procedures

Table (	of co	ntents		Page
	Refer Prelin	ences ninary requirementsedure		1 1 2
List of	table	es		
	1 2 3 4 5 6 7	Required conditions	pendables	
List of	figu	res		
	1	Lift the upper bearing cup		3
		Refe	erences	
		Table 1	References	
Data mo	dule /	Technical publication	Title	
S1000DE	3IKE-A	AA-DA2-10-00-00AA-520A-A	Stem – Remove procedures	

## Preliminary requirements

# **Required conditions**

## Table 2 Required conditions

Action / Condition	Data module / Technical publication
The bicycle is safely held on a work stand	



## **Required persons**

#### Table 3 Required persons

Persons	Category	Skill level	Trade/Trade code	Estimated time
Man A	Bike Rider	Intermediate	Operator	0,5 h

## Support equipment

#### Table 4 Support equipment

Name	Manufacturer / Part No.	Quantity	Remark
Work stand	MFR: Bikey /PN: Stand-001	1 EA	

## Consumables, materials and expendables

#### Table 5 Consumables, materials and expendables

Name	Manufacturer / Part No.	Quantity	Remark
None			_

## **Spares**

#### Table 6 Spares

Name	Manufacturer / Part No.	Quantity	Remark
None			

# Safety conditions

#### **NOTE**

It is not necessary to remove the handlebar for this procedure.

## **Procedure**

- 1 Remove the stem (refer to S1000DBIKE-AAA-DA2-10-00-00AA-520A-A).
- 2 Remove:

the spacers

the brake cable hangar


the dust seals


the conical expansion washer(s) from the steerer tube

3 Lift the upper bearing cup off (refer to Fig 1) and then remove the fork from the frame.

Produced by Docuneering Ltd

Applicable to: Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)

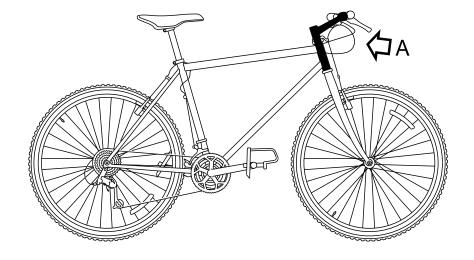

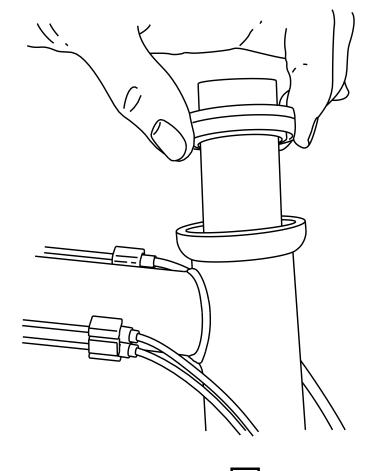

Α

ICN-S1000DBIKE-AAA-DA23000-0-U8025-00532-A-04-1

Fig 1 Lift the upper bearing cup



# Requirements after job completion

# **Required conditions**

Table 7 Required conditions

Action / Condition	Data module / Technical publication	
None		



## **Headset**

# Install procedures

Table of co	ontents	Pag
Refe Prelii Proc Requ	rencesminary requirementsedureuirements after job completion	
List of tabl	es	
1 2 3 4 5 6 7	Required conditions	kpendables
	Ref	erences
	Table :	1 References
Data module /	Technical publication	Title
S1000DBIKE-A	AA-DA2-10-00-00AA-720A-A	Stem – Install procedures

# Preliminary requirements

# **Required conditions**

#### Table 2 Required conditions

Action / Condition	Data module / Technical publication
The bicycle is safely held on a work stand	

# **Required persons**

## Table 3 Required persons

Persons	Category	Skill level	Trade/Trade code	Estimated time
Man A	Bike Rider	Intermediate	Operator	1,5 h

Applicable to: Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)

S1000DBIKE-AAA-DA2-30-00-00AA-720A-A



## Support equipment

Table 4 Support equipment

Name	Manufacturer / Part No.	Quantity	Remark
Work stand	MFR: Stand /PN: Stand-001	1 EA	

## Consumables, materials and expendables

#### Table 5 Consumables, materials and expendables

Name	Manufacturer / Part No.	Quantity	Remark
None			

## **Spares**

#### Table 6 Spares

Name	Manufacturer / Part No.	Quantity	Remark
Frame fork	MFR: KZ555 /PN: St-001-02	1 EA	
Upper bearing cup	MFR: KZ555 /PN: St-001-03	1 EA	
Brake cable hangar	MFR: KT444 /PN: BR-LVRS-002	1 EA	
Dust seal	MFR: KZ555 /PN: St-001-04	1 EA	
Conical expansion washer	MFR: KZ555 /PN: St-001-05	1 EA	

# Safety conditions

None

## **Procedure**

- 1 Install the Frame fork on the frame.
- 2 Install the Upper bearing cup.
  - Install the components that follow on the steering tube:

the Brake cable hangar

the Dust seal

the Conical expansion washer

4 Install the stem (refer to \$1000DBIKE-AAA-DA2-10-00-00AA-720A-A).

Produced by Docuneering Ltd



# Requirements after job completion

# **Required conditions**

Table 7 Required conditions

Action / Condition	Data module / Technical publication	
None		





#### **Frame**

# Description of how it is made


Table	of co	ontents		Page
	Refe	rencesription		1 1
List o	f tabl	es		
	1	References		1
List o	f figu	res		
	1 2			
			References	
			Table 1 References	
Data m	odule /	Technical publication	Title	
None				


# Description

## 1 The bicycle frame

The frame is the skeleton, the primary part of your bicycle. Its structure makes the bicycle resistant to large forces.

The initial frames (refer to Fig 1) were tubes of aluminum or steel welded together.

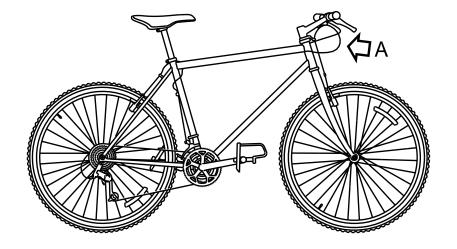


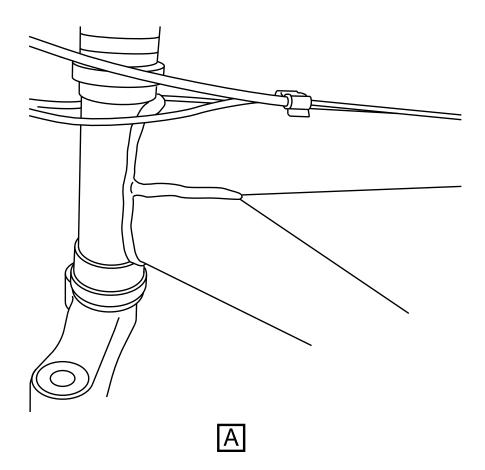

ICN-S1000DBIKE-AAA-DA30000-0-U8025-00534-A-04-1 Fig 1 Welded frame joints



Subsequent frames (refer to Fig 2) can be made out of a wide variety of materials, including aluminium, titanium, or chrome moly.

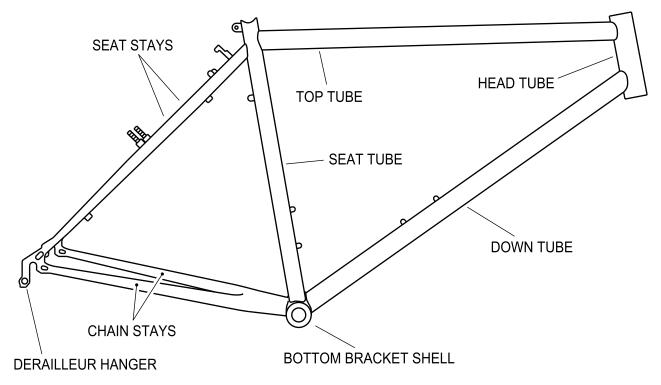

ICN-S1000DBIKE-AAA-DA30000-0-U8025-00503-A-04-1 Fig 2 Frame

are different and can also be of different materials (for example, titanium or chrome moly). Some bicycle frames are of carbon fiber. To get this material, it is necessary to put sheets of carbon fiber cloth on foam forms and epoxy them in position. This procedure gives a very light, strong structure that can have different shapes.

The frame includes the parts that follow:

- the top tube (the higher bar of the bicycle frame)
- the down tube (the section of the frame that extends from the stem to the bottom bracket)
- the head tube (the part of the frame that the fork steerer tube goes through)
- the seat tube (the vertical part of the frame that is the rear of the front triangle and that is between the bottom bracket and the top tube)
- the seat stay (the tube that includes the distance between the seat tube and the rear dropouts)
- the chain stay (the tube that is the bottom part of the rear triangle)





#### Horn

## Isolated fault

## **Fault codes**

Fault code	Fault description
NYCJD03	Horn failed

# Table of contentsPageIsolated fault1References1Fault reporting1

## List of tables

## References

#### Table 1 References

Data module / Technical publication	Title
S1000DBIKE-AAA-DA3-10-00-00AA-921A-A	Horn – Remove and install a new item

## Fault reporting

## Fault code

NYCJD03

## **Fault description**

Horn failed

# Locate and repair

# 1 Locate and repair LRU

Line replaceable unit

Nomenclature	Identification
Horn	MFR: KZ444/PN: Horn-001





Repair procedures: S1000DBIKE-AAA-DA3-10-00-00AA-921A-A



## Horn

## Remove and install a new item

Table c	of contents	Page
	Remove and install a new item References Preliminary requirements Procedure Requirements after job completion	1 1 2
List of	tables	
	1 References	1222
	References	
	Table 1 References	
Data mod	dule / Technical publication Title	

# Preliminary requirements

# **Required conditions**

#### Table 2 Required conditions

Action / Condition	Data module / Technical publication	
None		

# **Required persons**

Produced by Docuneering Ltd

## Table 3 Required persons

Persons	Category	Skill level	Trade/Trade code	Estimated time
As required				

Applicable to: Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)

S1000DBIKE-AAA-DA3-10-00-00AA-921A-A



## Support equipment

Table 4 Support equipment

Name	Manufacturer / Part No.	Quantity	Remark
Specialist toolset	MFR: KZ666 /PN: BSK-TLST-001	1 EA	
8mm Allen wrench	MFR: KZ666 /PN: BSK-TLST-001-08	1 EA	

## Consumables, materials and expendables

#### Table 5 Consumables, materials and expendables

Name	Manufacturer / Part No.	Quantity	Remark
None			

## **Spares**

#### Table 6 Spares

Name	Manufacturer / Part No.	Quantity	Remark
Horn	MFR: KZ444 /PN: Horn-001	1 EA	

## Safety conditions

None

## **Procedure**

- 1 Safely hold the bicycle.
- 2 Remove the horn.
- 2.1 Use the 8mm Allen wrench from the Specialist toolset and remove the two Allen screws.
- 2.2 Remove the horn.
- 3 Install the new Horn.
- 3.1 Install the new Horn on the handlebars.
- 3.2 Use the 8mm Allen wrench from the Specialist toolset and tighten the two Allen screws.



# Requirements after job completion

# **Required conditions**

Table 7 Required conditions

Action / Condition	Data module / Technical publication
Safely discard the horn that you removed	Local Disposal Procedures





#### **Drivetrain**

## Description of how it is made

Table		ontents		Page
	Desc Refe Desc 1	ription of how it is made rencesription		1 1 1
List of	f tabl			
	1	References	References	1
Data ma	adula (	Tackwing! wublication	Table 1 References	
None	paule /	Technical publication	Title	

## Description

#### 1 Drive train

The drive train is the group of components that are necessary for the operation of the bicycle. The drive train is the primary system for the movement of the bicycle. A typical drive train has the chain wheels, the chain, the pedals and the saddle.

Since the drive train has many components, it is necessary to do a regular maintenance. The drive train maintenance is easy and the users can disassemble and assemble each part of the drive train. Because of this, when one part is defective, it is possible to remove and replace it with a new one.





## Chain

## Oil

Table	of co	ontents	Page		
	Oil		,		
		erences			
	Preliminary requirements				
		edure			
		uirements after job completion			
List of	f tabl	les			
	1	References			
	2	Required conditions			
	3	Required persons			
	4	Support equipment			
	5	Consumables, materials and expendables			
	6	Spares			
	7	Required conditions			
List of	f figu	ıres			
	1	Derailleur pivots			
	2	Derailleur tension			
	3	Brake lever pivots			
	4	Lubricate the chain			
		Potoronoo			
		References			
		Table 1 References			
Data mo	dule /	Technical publication Title			
None					

# Preliminary requirements

# **Required conditions**

#### Table 2 Required conditions

Action / Condition	Data module / Technical publication
The bicycle chain is clean and dry	



## Required persons

#### Table 3 Required persons

Persons	Category	Skill level	Trade/Trade code	Estimated time
Man A	Operator	Intermediate	Bike rider	0,5 h

## Support equipment

#### Table 4 Support equipment

Name	Manufacturer / Part No.	Quantity	Remark
Clean dry cloth	MFR: KZ666 /PN: BSK-TLST-001-12	1 EA	
Floor covering	MFR: KK999 /PN: PPP-001	1 pack	

## Consumables, materials and expendables

#### Table 5 Consumables, materials and expendables

Name	Manufacturer / Part No.	Quantity	Remark
Wet lube	MFR: KZ222 /PN: LL-007	1 dl	
Dry lube	MFR: KZ222 /PN: LL-006	1 dl	

## **Spares**

#### Table 6 Spares

Name	Manufacturer / Part No.	Quantity	Remark
None			

# **Safety conditions**

#### **WARNING**

Dry Lube is a very dangerous substance. Do not get it onto your skin. Use it in a well ventilated area. If you swallow it seek immediate medical advice. If it gets into your eyes wash your eyes in clean water and seek medical advice.

## **WARNING**

Wet Lube is a very dangerous substance. Do not get it onto your skin. Use it in a well ventilated area. If you swallow it seek immediate medical advice. If it gets into your eyes wash your eyes in clean water and seek medical advice.





## **Procedure**

- 1 Apply the penetrating lubricant into all the parts of the bike that move. This includes:
  - derailleur pivots (refer to Fig 1)
  - derailleur tension (refer to Fig 2)
  - brake lever pivots (refer to Fig 3)

These brake lever pivots include:

- derailleur pivots
- derailleur tension
- guide wheels
- brake lever pivots
- control cables and where they go into their casings

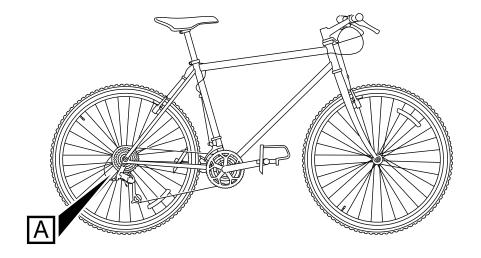


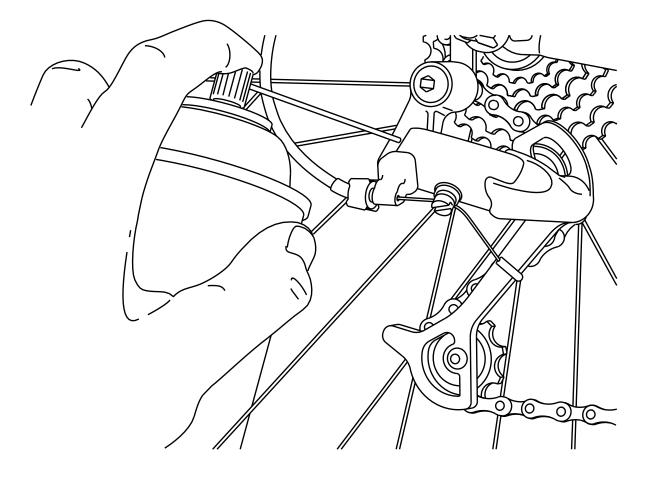


Α

ICN-S1000DBIKE-AAA-DA51000-0-U8025-00521-A-04-1


Fig 1 Derailleur pivots

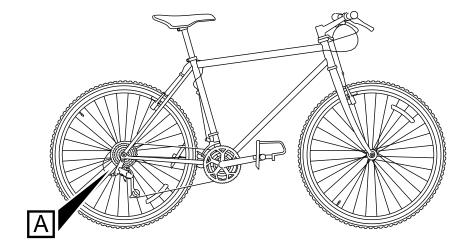

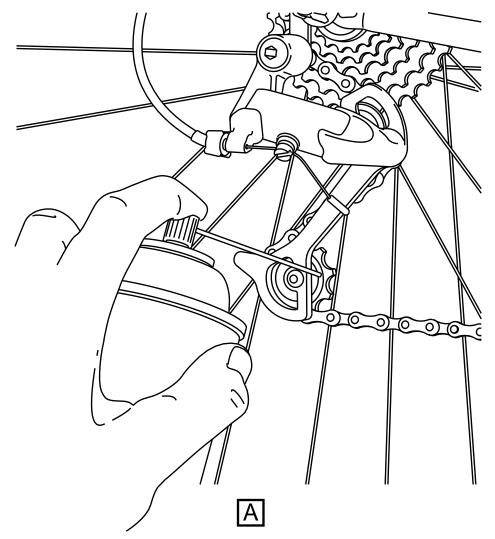

ICN-S1000DBIKE-AAA-DA51000-0-U8025-00522-A-04-1


Fig 2 Derailleur tension

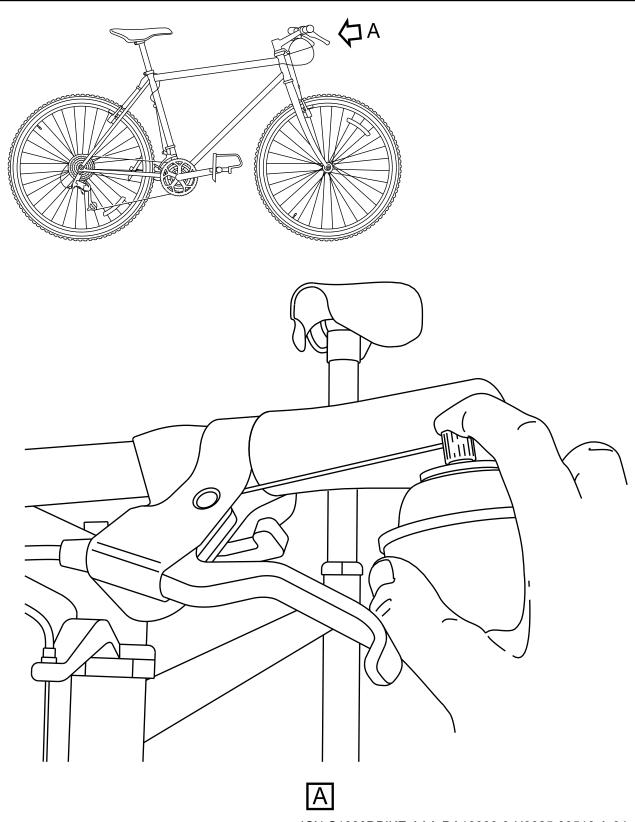

ICN-S1000DBIKE-AAA-DA10000-0-U8025-00516-A-04-1 Fig 3 Brake lever pivots



2	Lubricate the chain.
2.1	Make sure the chain is clean and dry.
2.2	Put the on the floor below the chain.
2.3	Use a Dry lube for dry conditions.
2.4	Use a Wet lube for wet conditions
2.5	Apply the lubricant to each roller of the chain (refer to Fig 4) but only apply a small quantity.

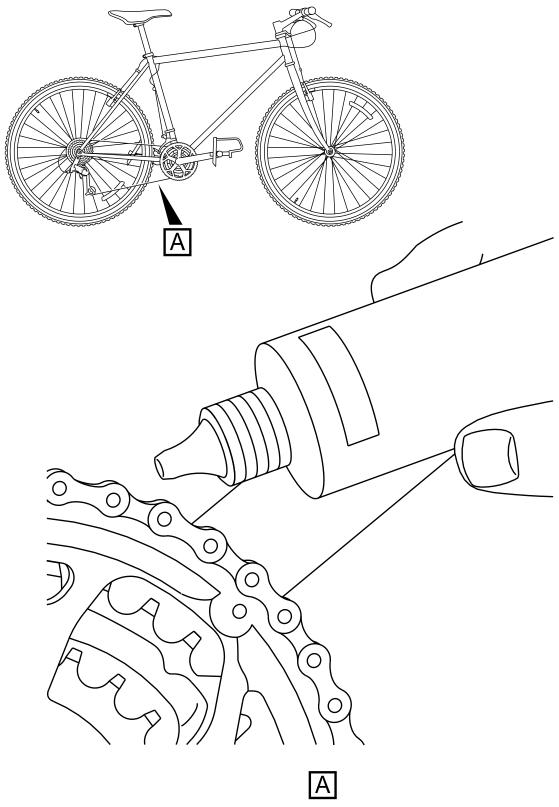

ICN-S1000DBIKE-AAA-DA41000-0-U8025-00528-A-04-1 Fig 4 Lubricate the chain



2.6	Hold the nozzle of the container above the front of the chain ring and slowly turn the cranks rearwards.
2.7	CAUTION
	Do not get lubrication oil into the brake system. Oil in the break system can affect the efficiency of the bake system. Do not get oil onto the floor where it can easily get transferred onto the brake system.
	Let the lubricant soak into chain before you clean the unwanted lubricant from the chain.
3	Do a check of the rear wheel rim and clean the unwanted lubricant if necessary.
4	Do a check of the chain to make sure that each link is lubricated. If there are links that do not move easily or have become frozen, lubricate the chain again (refer to Step 2).
5	Do a check of the remaining lubricated parts and clean the unwanted lubricant with a Clean dry

# Requirements after job completion

# **Required conditions**

cloth.

Table 7 Required conditions

Action / Condition	Data module / Technical publication
None	

**UNCLASSIFIED** 





## Chain

# Clean with chain cleaning fluid

Table of	of contents	Page
List of	References	
	2 Required conditions	d expendables
	F	References
	Tal	ole 1 References
Data mo	dule / Technical publication	Title
S1000DE	SIKE-AAA-D00-00-00-00AA-121A-A	Bicycle – Pre-operation procedures (crew)

# Preliminary requirements

# **Required conditions**

## Table 2 Required conditions

Action / Condition	Data module / Technical publication
None	

# Support equipment

#### Table 3 Support equipment

Name	Manufacturer / Part No.	Quantity	Remark
Stiff bristle brush	MFR: KZ666 /PN: BSK-TLST-001-02	1 EA	
Chain cleaning fluid	MFR: KZ222 /PN: LL-003	As required	

Applicable to: Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)



Table 3 Support equipment (Continued)				
Name	Manufacturer / Part No.	Quantity	Remark	
Chain cleaning tool	MFR: KZ666 /PN: BSK-TLST-001-03	1 EA		

## Consumables, materials and expendables

Table 4 Consumables, materials and expendables

Name	Manufacturer / Part No.	Quantity	Remark
Floor covering	MFR: KK999 /PN: PPP-001	1 pack	
General lubricant	MFR: KZ222 /PN: LL-001	As required	

## **Spares**

#### Table 5 Spares

Name	Manufacturer / Part No.	Quantity	Remark	
None				

## **Safety conditions**

None

#### **Procedure**

Do the inspection of the chain as given in the pre-ride checks (refer to \$1000DBIKE-AAA-D00-00-00-00AA-121A-A).

- 2 Prepare the cleaning area.
- 2.1 Put the Floor covering on a satisfactory floor area.
- 2.2 Put the bicycle on the floor covering.
- 3 Clean debris from the chain.
- 3.1 Use the Stiff bristle brush and loosen as much unwanted material as possible.
- 3.2 Make sure that you remove all the unwanted material from the chain.
- 4 Clean the chain.
- 4.1 Open the Chain cleaning tool and fill with the Chain cleaning fluid.
- 4.2 Move the chain to the middle chainring and the middle sprocket at the rear.
- 4.3 Put the chain in the chain guides of the chain cleaning tool and lock the tool on the chain.



4.4	Hold the tool with the left hand and slowly turn the rearwards with the right hand.
4.5	Press the button on the cleaning tool to make sure that cleaning fluid flows until the tool is empty.
4.6	If necessary, remove the unwanted chain cleaning fluid.
5	Lubricate the chain.
5.1	Use the General lubricant and lubricate the chain.
5.2	Unlock and remove the cleaning tool.
5.3	If necessary, remove the unwanted lubricant.

# Requirements after job completion

# **Required conditions**

Table 6 Required conditions

Action / Condition	Data module / Technical publication	
Move the bicycle to its storage area and remove the	floor covering.	





#### **Drive train**

#### Correlated fault

Table of contents	Page
Correlated faultReferencesFault reporting	
List of tables	
1 References	1
References	
Table 1 References	
Data module / Technical publication Title	
None	

# Fault reporting

### Messages and warnings

**Built-in test messages** 

1 Fault code: 100FC01 Fault description

The pedal mechanism is jammed

2 Fault code: 200FC01

**Fault description** 

The derailleur is jammed

#### Isolate detected fault

#### 1 Fault isolation test – LRU

Line replaceable unit

Nomenclature	Identification
Bicycle chain	MFR: KZ120/PN: Tchain-120



### **Remarks**

Prepare the derailleur to put transmission chain back on pedal mechanism.



#### **Gears**

### Description of how it is made

Table of contents	Page
Description of how it is made	1 1
Description	1
1 Gears	1
List of tables	
1 References	1
References	

#### Table 1 References

Data module / Technical publication	Title
S1000DBIKE-AAA-DA5-10-00-00AA-041A-A	Mechs – Description of how it is made
S1000DBIKE-AAA-DA5-30-00-00AA-041A-A	Shifters – Description of how it is made

### Description

#### 1 Gears

The gears include the mechanism, the hubs and the shifters.

The description of the mechanisms is given in S1000DBIKE-AAA-DA5-10-00-00AA-041A-A.

The description of the shifters is given in S1000DBIKE-AAA-DA5-30-00-00AA-041A-A.

The bicycles of these days can have 27 gears or more. The mountain bikes use a set that includes:

- Three socket sprockets of different dimension on the front
- Nine socket sprockets of different dimensions at the rear

This set gives the gear ratios.

The shifters installed on the handlebars change the gears and operate the mechanisms (also known as derailleurs). These derailleurs are cable-actuated mechanisms. They move the chain from the different sprockets.

The hub is the center of the wheel and contains the axle and bearings.

The gears let the rider crank at the pedals at a constant movement on slopes of different angles.





#### Mechs

### Description of how it is made

<b>Table</b>	of co	ntents		Page
	Descr	iption of how it is made.		1
	Descr			
	1			
	1.1			
	1.2	Rear derailleur		3
List of	table	es		
	1	References		1
List of	i figui	res		
	1	Front derailleur		2
	2			
			References	
			Table 1 References	
Data mo	dule / 1	Technical publication	Title	
None				

### Description

#### 1 Derailleur


There are two different types of derailleur, the front and the rear.

#### 1.1 Front derailleur

The front derailleur (refer to Fig 1) contains two types of screws to keep the movement of the derailleur to a minimum. These screws are:

the stop screw low-gear the stop screw high-gear

The function of these screws is to prevent the rider from over shifting . If this occurs, the chain will go out of the chain wheel.

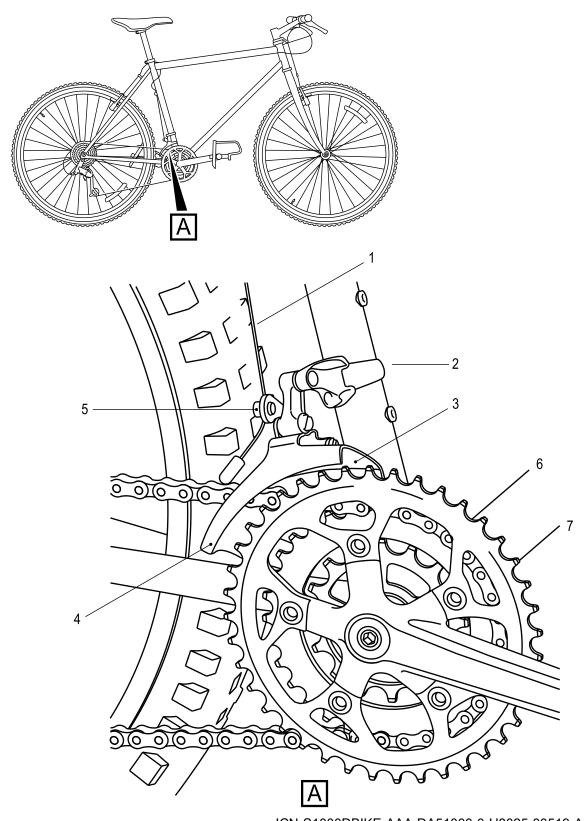

ICN-S1000DBIKE-AAA-DA51000-0-U8025-00519-A-04-1

Fig 1 Front derailleur





The derailleur is installed on the bicycle seat tube with a clamp and is parallel to the three front sprockets.

The shift cable is connected between the shifters on the handle bars and the cable clamp bolt on the front derailleur. This operates the derailleur. On the sprockets there is an inner and outer cage. The clamp attaches the cage.

#### 1.2 Rear derailleur

The rear derailleur (refer to Fig 2) section contains the sprockets for the different gear changes. When the cable clamp bolt is tight, it holds the shift cable in its position. A screwed bolt holds the tension wheel.

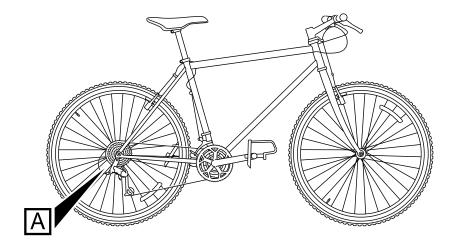

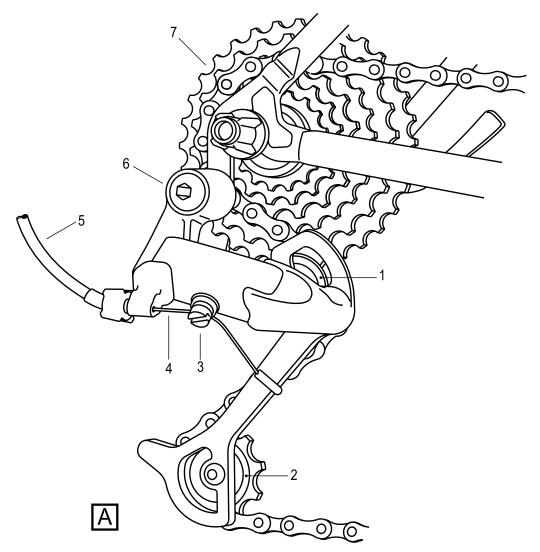

ICN-S1000DBIKE-AAA-DA51000-0-U8025-00520-A-04-1

Fig 2 Rear derailleur





The derailleur mounting bolt connects the derailleur to the frame. When the user attaches this bolt, this makes sure that the cage plates are parallel with the chain rings.

The guide wheel has the function to move the chain with the derailleur. It moves the chain from one sprocket to the other. The guide wheel must not move on its axis. If this occurs, there will be wear on the wheel. The position of the guide wheel is below the largest sprocket.





#### Hubs

# Clean with degreasing agent

Table (	of co	ontents	Page
	Refe Prelii Proc	n with degreasing agent	1 1 2
List of	tabl	les	
	1 2 3 4 5 6 7	References Required conditions Required persons Support equipment Consumables, materials and expendables Spares Required conditions	
List of	figu	ires	
	1	Removing the axle	4
		References	
		Table 1 References	
Data mo	dule /	Technical publication Title	
None			

### Preliminary requirements

### **Required conditions**

Table 2 Required conditions

Action / Condition	Data module / Technical publication	
Rear wheel removed	S1000DBIKE-AAA-DA0-20-00-00AA-520A-A	



### Required persons

#### Table 3 Required persons

Persons	Category	Skill level	Trade/Trade code	Estimated time
Man B	Supervisor	Advanced	Bicycle mechanic	0,75 h
Man A	Basic user		Operator	0,25 h

### **Support equipment**

#### Table 4 Support equipment

Name	Manufacturer / Part No.	Quantity	Remark
Specialist toolset	MFR: KZ666 /PN: BSK-TLST-001	1 EA	

### Consumables, materials and expendables

#### Table 5 Consumables, materials and expendables

Name	Manufacturer / Part No.	Quantity	Remark
Degreasing agent	MFR: KZ222 /PN: LL-004	As required	
General grease	MFR: KZ222 /PN: LL-005	As required	

### **Spares**

#### Table 6 Spares

Name	Manufacturer / Part No.	Quantity	Remark
None			

### Safety conditions

None

#### **Procedure**

- 1 Remove the axle.
- 1.1 Use the cone-wrench from the Specialist toolset and remove the locknut from one side of the
- 1.2 Remove the washer and the cone from the axle.




1.3 CAUTION

Make sure you do not lose the bearings from the hub. Be prepared to catch the bearings if they fall out. Missing bearings can cause damage to the hub.

Pull the axle out from the other side as shown in Fig 1.



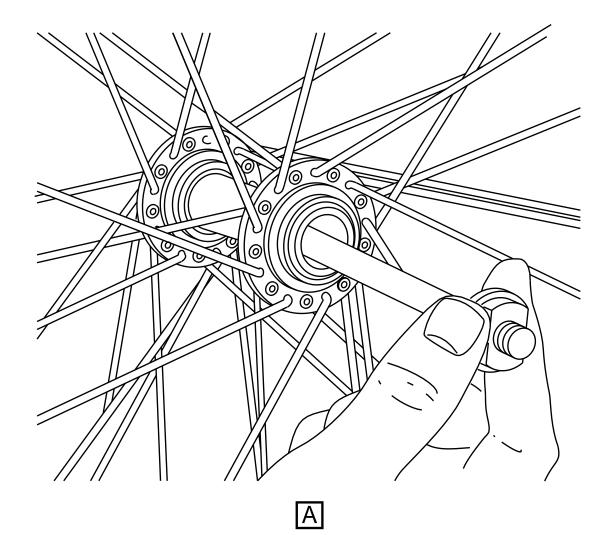

ICN-S1000DBIKE-AAA-DA52000-0-U8025-00524-A-04-1 Fig 1 Removing the axle



2	Remove the bearings.
2.1	Use a small screwdriver from the Specialist toolset and remove the bearings from their races.
2.2	Make sure that each side of the hub has the same number of bearings.
2.3	Use the Degreasing agent and clean all the parts of the hub.
2.4	Do a check of the axle to make sure that it is straight.
2.5	Examine the bearing contact area on the cones and the races in the hub for pitting and other signs of damage.
2.6	Do a check of the ball bearings for signs of damage.
2.7	Apply a large quantity of General grease on each hub race.
3	Assemble the hub.
3.1	Install the ball bearings into the races and push them into the grease.
3.2	Apply more grease on the tops of the bearings.
3.3	Install the axle through the hub.
3.4	Install the cone, the washer and the locknut on the other side of the axle.
3.5	Use the cone-wrench from the specialist toolset and carefully tighten the locknut.

# Requirements after job completion

# **Required conditions**

Table 7 Required conditions

Action / Condition	Data module / Technical publication		
None			





#### **Shifters**

### Description of how it is made

Table	of co	ontents	Page
	Refe	cription of how it is made	
	2	How a thumb shifter is made up	
List of	f tabl	les	
	1	References	1
List o	f figu	ıres	
	1	Thumb shifter index type	2
	2	Unscrew wingnut	
	3	Loosen the nut	
	4	Loosen the shifter clamp bolt	7
		References	
		Table 1 References	
Data mo	odule /	Technical publication Title	
None			


### Description


#### 1 Shifters

The thumb shifter is a usual type in modern bicycles. It is possible to adjust this type of shifter for operation in the index position or in the friction position. The differences between the two are:

- The index shifters change the gears with a click of a lever.
- The friction shifters hold the derailleur in its position by friction.

The thumb shifters (refer to Fig 1) are held on the bicycle with a screw. The paragraph that follows gives a description of a thumb shifter.

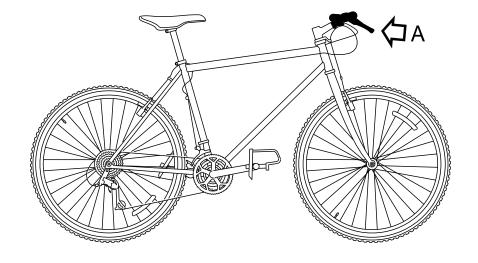

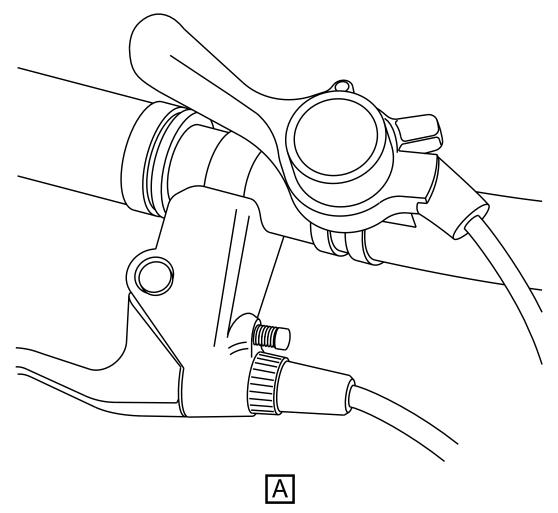

ICN-S1000DBIKE-AAA-DA53000-0-U8025-00535-A-04-1

Fig 1 Thumb shifter index type



### 2 How a thumb shifter is made up

A wing nut (refer to Fig 2) from the top of the lever holds the thumb shifter. The lever is on top of the mount and the mount is on the handle bar with a nut. To remove the mount, it is necessary to loosen the nut of two turns (refer to Fig 3), then the mount can move from the handle bar from the top of the lever. The lever sits on top of the mount and the mount is fixed into pace on the handle bar by a nut.



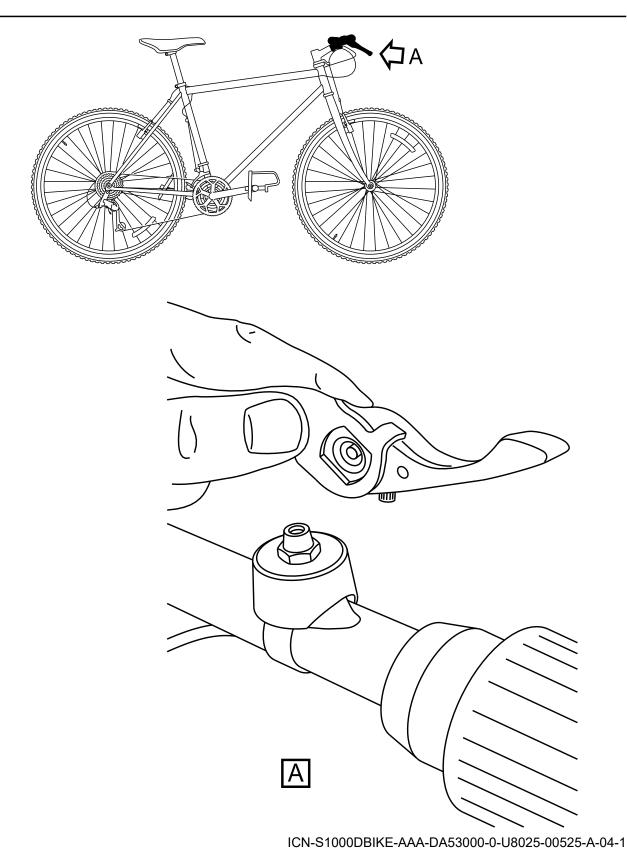


Fig 2 Unscrew wingnut

Applicable to: Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)

S1000DBIKE-AAA-DA5-30-00-00AA-041A-A

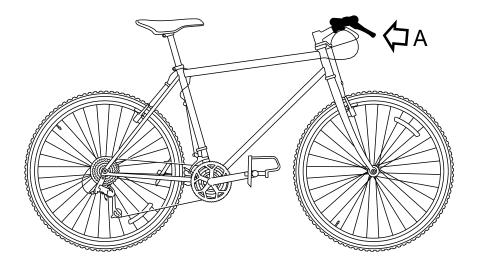


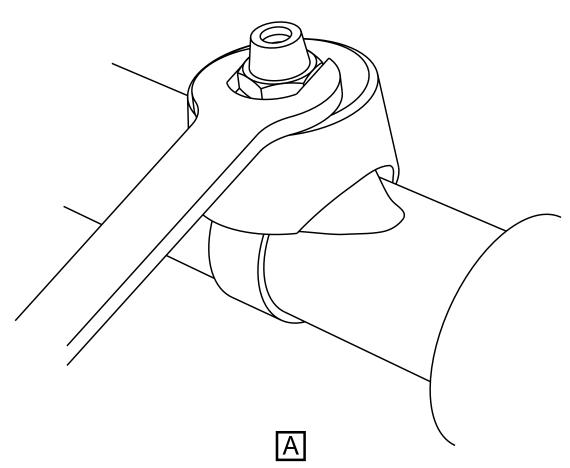


ICN-S1000DBIKE-AAA-DA53000-0-U8025-00526-A-04-1 Fig 3 Loosen the nut



On modern models of this shifter, there is a clamp bolt that holds the shifter in its position (refer to Fig 4). The user can loosen the clamp bolt with an applicable tool. This lets the shifter release the handlebar.

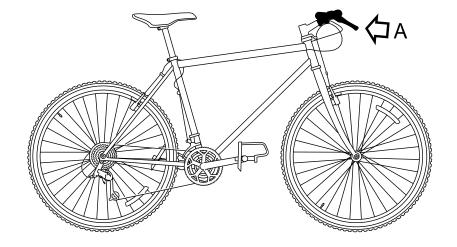

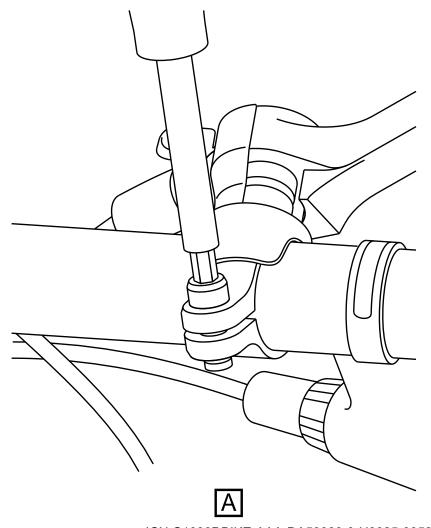

ICN-S1000DBIKE-AAA-DA53000-0-U8025-00527-A-04-1

Fig 4 Loosen the shifter clamp bolt





# **Section 2**

**Electrical Lighting System** 





# Wiring data

Field description

This is a "wrngflds" Data Module

The Docuneering S1000D XSL-FO Stylesheets do not yet support the "wrngflds" Data Module





# **Electrical system**

# Description of how it is made and its function

Table	of co	ntents		Page
	Refer	encesiption	and its function	1 1
List of	ftable	es		
	1	References		1
List of	figu	res		
	1	Lighting system		2
			References	
			Table 1 References	
Data mo	dule /	Technical publication	Title	
None				

# Description

# 1 Lighting system

The illustration that follows (see Fig 1) shows the lighting system of the bicycle.

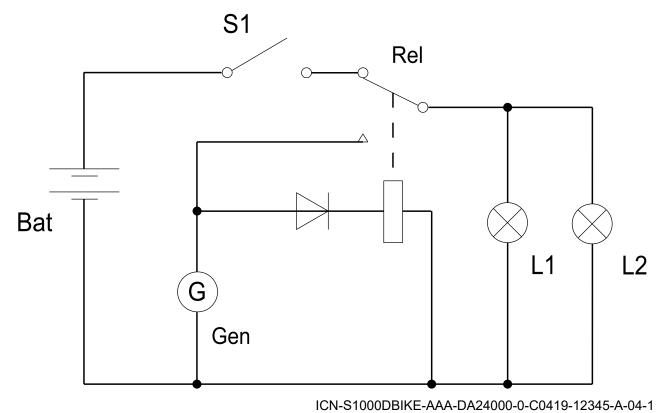


Fig 1 Lighting system



**Table of contents** 

# Wiring

# **Equipment lists**

Table of contents		Page
References		1
List of tables		
1 References		1
	References	
	Table 1 References	
Data module / Technical publication	Title	
None		

# Wiring data

Ident	CLC	Qty	Information	Installation	Applicability
L1 PN: Front light	16		RPC: CAGE: U8025 Name: UK MoD	Locations:     Handle bars	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
L2 PN: Rear light	16		RPC: CAGE: U8025 Name: UK MoD	<ul><li>Locations:</li><li>Seat post</li></ul>	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Batt PN: Battery	16		RPC: CAGE: U8025 Name: UK MoD	<ul><li>Locations:</li><li>Frame</li><li>NHA: FIN ELO-Box</li></ul>	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Gen PN: Generator	16		RPC: CAGE: U8025 Name: UK MoD	<ul><li>Locations:</li><li>Steering tube</li></ul>	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Rel PN: Relay	10		RPC: CAGE: U8025 Name: UK MoD	<ul><li>Locations:</li><li>Frame</li><li>NHA: FIN ELO-Box</li></ul>	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)



(Continued)					
Ident	CLC	Qty	Information	Installation	Applicability
VV1 PN: Distribution module	07		Transverse link: - Contacts: - 1 + - 2 + - 3 + - 4 + - Contacts: - 1 2 3 4 - RPC: CAGE: U8025 Name: UK MoD	Locations:     Frame     NHA: FIN ELO-Box	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
S1 PN: Switch	15		RPC: CAGE: U8025 Name: UK MoD	<ul> <li>Locations:         <ul> <li>Handle bars</li> <li>NHA: FIN ELO-Box</li> </ul> </li> </ul>	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
C_Batt PN: Connector	3		RPC: CAGE: U8025 Name: UK MoD	<ul> <li>Locations:         <ul> <li>Frame</li> <li>Sibling plug id: FIN</li> <li>C_Bike</li> <li>NHA: FIN ELO-Box</li> </ul> </li> </ul>	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
C_Bike PN: Receptacle	3		RPC: CAGE: U8025 Name: UK MoD	<ul> <li>Locations:         <ul> <li>Frame</li> <li>Sibling plug id: FIN</li> <li>C_Batt</li> <li>NHA: FIN ELO-Box</li> </ul> </li> </ul>	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Diode PN: Diode	18	2	RPC: CAGE: U8025 Name: UK MoD	<ul> <li>Install id: d1 Locations: <ul> <li>Frame</li> <li>NHA: FIN ELO-Box</li> <li>Pos. on NHA: <ul> <li>Mount position: LH</li> </ul> </li> <li>Install id: d2 Locations: <ul> <li>Frame</li> <li>NHA: FIN ELO-Box</li> <li>Pos. on NHA: <ul> <li>Mount position: RH</li> </ul> </li> </ul></li></ul></li></ul>	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Sensor PN: Speed sensor	16		RPC: CAGE: U8025 Name: UK MoD	<ul><li>Locations:</li><li>Steering tube</li></ul>	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
T01 PN: Tachometer	16		RPC: CAGE: U8025 Name: UK MoD	<ul><li>Locations:</li><li>Handle bars</li></ul>	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)



	(Continued)					
ldent	CLC	Qty	Information	Installation	Applicability	
ELO-Box PN: Electronic Box 01	13		Max mount. pos.: 5 RPC: CAGE: U8025 Name: UK MoD	Locations:     Frame	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)	
FT1 PN: GT-002-WD	11		RPC: CAGE: U8025 Name: UK MoD	<ul> <li>Locations:         <ul> <li>Frame</li> </ul> </li> <li>NHA: FIN ELO-Box</li> <li>Pos. on NHA:         <ul> <li>Mount position: P1</li> </ul> </li> </ul>	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)	
FT2 PN: GT-004-WD	11		RPC: CAGE: U8025 Name: UK MoD	<ul> <li>Locations:         <ul> <li>Frame</li> </ul> </li> <li>NHA: FIN ELO-Box</li> <li>Pos. on NHA:         <ul> <li>Mount position: P2</li> </ul> </li> </ul>	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)	
FT3 PN: GT-004-WD	11		RPC: CAGE: U8025 Name: UK MoD	<ul> <li>Locations:         <ul> <li>Frame</li> </ul> </li> <li>NHA: FIN ELO-Box</li> <li>Pos. on NHA:         <ul> <li>Mount position: P3</li> </ul> </li> </ul>	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)	





# Wiring

## Wire list

Table of contents		Page
References		
List of tables		
1 References		
	References	
	Table 1 References	
Data module / Technical publication	Title	
None		

# Wiring data

ldent	Connection		Information	Applicability	
	From	То	_		
FL1AA	FIN: L1	FIN: VV1	Wire code:	Mountain bicycle	
State: Active	Contact: + Wire conn. code: Electrical potential: Contact order: 1 NA code: 01	Contact: 1 + PN: P2201-P Wire conn. code: Electrical potential: TM grouping: 1 Block grouping: 1 Shunt grouping: 1 Contact order: 1 NA code: 03	Wire type: AP Wire guages: - 010 (proj) PN: W2201-K Harn. id: Lamp1 Wire seq. no.: 1 Circuit: 234 Section: 567 Twists: - Lamp1 Twisting type: 1 Length: 1000 Wire color: red U8025 Routing: Feed-throughs: FIN: FT3 Hole id: 1	and (Mountain storm Mk1 or Brook trekker Mk9)	



		(Continued)		
ldent	Connection		Information -	Applicability
	From	То		
FL2AA State: Active	FIN: L1 Contact: - Wire conn. code: Electrical potential: Contact order: 2 NA code: 01	FIN: VV1 Contact: 1 - Wire conn. code: Electrical potential: TM grouping: 1 Block grouping: 1 Shunt grouping: 2 Contact order: 5 NA code: 03	Wire code: Wire type: AP Wire guages: - 010 (proj) PN: 23-4567 Harn. id: Lamp1 Wire seq. no.: 2 Twists: - Lamp1 Twisting type: 1 Length: 1000 Wire color: blue U8025 Routing: Feed-throughs: FIN: FT3 Hole id: 2	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
NC1VI State: Not active	FIN: VV1 Contact: 4 + Wire conn. code: Electrical potential: TM grouping: 1 Block grouping: 1 Shunt grouping: 1 Contact order: 4 NA code: 03			Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
RL1AA State: Active	FIN: L2 Contact: + Wire conn. code: Electrical potential: Contact order: 1 NA code: 01	FIN: VV1 Contact: 2 + PN: P2201-P Wire conn. code: Electrical potential: TM grouping: 1 Block grouping: 1 Shunt grouping: 1 Contact order: 2 NA code: 03	Wire seq. no.: 1	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)



		(Continued)		
ldent	Connection		Information -	Applicability
	From	То		
RL2AA State: Active	FIN: L2 Contact: - Wire conn. code: Electrical potential: Contact order: 2 NA code: 01	FIN: VV1 Contact: 2 - PN: P2201-M Wire conn. code: Electrical potential: TM grouping: 1 Block grouping: 1 Shunt grouping: 2 Contact order: 6 NA code: 03	Wire code: Wire type: AP Wire guages: - 010 (proj) Harn. id: Lamp2 Wire seq. no.: 2 Twists: - Lamp2 Twisting type: 1 Length: 1500 Wire color: blue U8025 Routing: Feed-throughs: FIN: FT3 Hole id: 4	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
GE2AA State: Active	FIN: Gen Contact: GND Wire conn. code: Electrical potential: Contact order: 2 Potential conn. order: 1 NA code: 01 Group code: G1-	FIN: VV1 Contact: 3 - PN: P2201-M Wire conn. code: Electrical potential: TM grouping: 1 Block grouping: 1 Shunt grouping: 2 Contact order: 7 NA code: 03	Wire code: Wire type: AP Wire guages: - 010 (proj) Wire seq. no.: 2 Length: 500 U8025 Routing: Feed-throughs: FIN: FT2 Hole id: 2	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
BT2AA Context: PN- AC-12561 MFG: F0001 Origin: Manufacturer State: Active	FIN: Batt Contact: - Install direct: A Wire conn. code: Electrical potential: Contact order: 2 NA code: 01	FIN: C_Batt Contact: - Install direct: B Wire conn. code: Electrical potential: Contact order: 2 NA code: 02	Wire code: Wire type: AP Wire guages: - 010 (proj) Harn. id: Batt_01 Context: PN- AC-12561 MFG: F0001 Origin: Manufacturer Wire seq. no.: 2 Twists: - Batt Twisting type: 1 Length: 400 [critical] Wire color: black U8025 NHA: FIN ELO-Box	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)



		(Continued)		
ldent	Connection		Information	Applicability
	From	То		
GE1AA State: Active	FIN: Gen Wire conn. code: Electrical potential: Contact order: 1 Potential conn. order: 1 NA code: 01 Group code: G1+	FIN: Rel Contact: 2 Function: Generator mode Wire conn. code: Electrical potential: Block grouping: 2 Shunt grouping: 2 Contact order: 102 NA code: 04	Wire code: Wire type: AP Wire guages: - 010 (proj) Wire seq. no.: 1 Length: 500 U8025 Routing: Feed-throughs: FIN: FT2 Hole id: 1	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
GE3AA State: Active	FIN: Gen Wire conn. code: Electrical potential: Contact order: 1 Potential conn. order: 2 NA code: 01 Group code: G2+	FIN: Diode Contact: A Wire conn. code: Electrical potential: Block grouping: 1 Shunt grouping: 1 Contact order: 1 NA code: 04	Wire code: Wire type: AP Wire guages: - 010 (proj) Wire seq. no.: 3 Length: 500 U8025 Routing: Feed-throughs: FIN: FT2 Hole id: 3	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
GE3AB State: Active	FIN: Gen Wire conn. code: Electrical potential: Contact order: 1 Potential conn. order: 3 NA code: 01 Group code: G2+	FIN: Diode Contact: A Wire conn. code: Electrical potential: Block grouping: 1 Shunt grouping: 1 Contact order: 1 NA code: 04	Wire code: Wire type: AP Wire guages: - 010 (proj) Wire seq. no.: 3 Length: 500 U8025 Routing: Feed-throughs: FIN: FT2 Hole id: 4	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
BT1AA Context: PN- AC-12561 MFG: F0001 Origin: Manufacturer State: Active	FIN: Batt Contact: + Install direct: A Wire conn. code: Electrical potential: Contact order: 1 NA code: 01	FIN: C_Batt Contact: + Install direct: B Wire conn. code: Electrical potential: Contact order: 1 NA code: 02	Wire code: Wire type: AP Wire guages: - 010 (proj) Harn. id: Batt_01 Context: PN- AC-12561 MFG: F0001 Origin: Manufacturer Wire seq. no.: 1 Twists: - Batt Twisting type: 1	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)



lala sat	0	(Continued)	Información :	A 15
ldent	Connection		Information -	Applicability
	From	То	Length: 400 [critical] Wire color: red U8025 NHA: FIN ELO-Box	
BA1AA State: Active	FIN: C_Bike Contact: + Wire conn. code: Electrical potential: Contact order: 1 NA code: 02	FIN: S1 Contact: Batt Wire conn. code: Electrical potential: Block grouping: 1 Shunt grouping: 1 Contact order: 1 NA code: 04	Wire code: Wire type: AP Wire guages: - 010 (proj) Wire seq. no.: 1 Length: 1200 U8025 Routing: Feed-throughs: FIN: FT1 Hole id: 1 NHA: FIN ELO-Box	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
BA1AB State: Active	FIN: S1 Contact: ON Wire conn. code: Electrical potential: Block grouping: 1 Shunt grouping: 1 Contact order: 102 NA code: 04	FIN: Rel Contact: 3 Function: Battery mode Wire conn. code: Electrical potential: Block grouping: 2 Shunt grouping: 1 Contact order: 103 NA code: 04	Wire code: Wire type: AP Wire guages: - 010 (proj) Wire seq. no.: 1 Length: 1000 U8025 Routing: Feed-throughs: FIN: FT1 Hole id: 2 NHA: FIN ELO-Box	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
BA2AA State: Active	FIN: C_Bike Contact: - Wire conn. code: Electrical potential: Contact order: 2 NA code: 02	FIN: VV1 Contact: 4 - PN: P2201-M Wire conn. code: Electrical potential: TM grouping: 1 Block grouping: 1 Shunt grouping: 2 Contact order: 8 NA code: 03	Wire code: Wire type: AP Wire guages: - 010 (proj) Wire seq. no.: 2 Length: 200 U8025 NHA: FIN ELO-Box	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
LL1AA State: Active	FIN: Rel Contact: 1 Wire conn. code: Electrical potential: Block grouping: 2 Shunt grouping: 1 Contact order: 1 NA code: 04	FIN: VV1 Contact: 3 + PN: P2201-P Wire conn. code: Electrical potential: TM grouping: 1 Block grouping: 1 Shunt grouping: 1	Wire code: Wire type: AP Wire guages: - 010 (proj) Wire seq. no.: 1 Length: 500 U8025 NHA: FIN ELO-Box	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)



(Continued)				
ldent	Connection		Information	Applicability
	From	То		
		Contact order: 3 NA code: 03		
GE4AA State: Active	FIN: Gen Contact: GND Wire conn. code: Electrical potential: Contact order: 2 Potential conn. order: 2 NA code: 01 Group code: G1-	FIN: Rel Wire conn. code: Electrical potential: Block grouping: 1 Shunt grouping: 1 Contact order: 1 NA code: 04	Wire code: Wire type: AP Wire guages: - 010 (proj) Wire seq. no.: 4 Length: 500 U8025 Routing: Feed-throughs: FIN: FT2 Hole id: 4	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
GE5AA State: Logconn	FIN: Diode Contact: K Wire conn. code: Electrical potential: Block grouping: 1 Shunt grouping: 1 Contact order: 2 NA code: 04	FIN: Rel Wire conn. code: Electrical potential: Block grouping: 1 Shunt grouping: 1 Contact order: 2 Potential conn. order: 1 NA code: 04 Group code: R1		Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
GE5AB State: Logconn	FIN: Diode Contact: K Wire conn. code: Electrical potential: Block grouping: 1 Shunt grouping: 1 Contact order: 2 NA code: 04	FIN: Rel Wire conn. code: Electrical potential: Block grouping: 1 Shunt grouping: 1 Contact order: 2 Potential conn. order: 2 NA code: 04 Group code: R1		Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
T001 State: Active	FIN: T01 Contact: 1 Wire conn. code:    Screen order: 2    Electrical potential:     Contact order: 1 NA code: 01 Screens:    Type: 01, Lvl: 00,    Sty: 00	FIN: Sensor Contact: A Wire conn. code:     Screen order: 2     Electrical potential:         Contact order: 1 NA code: 01 Screens:         Type: 01, Lvl: 00,         Sty: 00	Wire code: Wire type: XY Wire guages: - 010 (proj) Harn. id: Tacho Wire seq. no.: 001 Screens: - SCT1 Twists: - Tacho Twisting type: 1 Length: 1200 Wire color: yellow	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)



		(Continued)		
Ident	Connection		Information	Applicability
	From	То	-	
			U8025	
T002 State: Active	FIN: T01 Contact: 2 Wire conn. code: Screen order: 3 Electrical potential: Contact order: 2 NA code: 01 Screens: Type: 01, Lvl: 00, Sty: 00	FIN: Sensor Contact: B Wire conn. code: Screen order: 3 Electrical potential: Contact order: 2 NA code: 01 Screens: - Type: 01, Lvl: 00, Sty: 00	Wire code: Wire type: XY Wire guages: - 010 (proj) Harn. id: Tacho Wire seq. no.: 002 Screens: - SCT1 Twists: - Tacho Twisting type: 1 Length: 1200 Wire color: green U8025	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
ND1 State: Logconn	FIN: T01 Wire conn. code:     Screen order: 1     Spec. conn.: 100     Electrical potential:         Contact order: 0 NA code: 01 Screens:     - Type: 03, Lvl: 01,     Sty: 01	FIN: T01 Wire conn. code:     Screen order: 1     Electrical potential:         Contact order: 0 NA code: 01 Screens:     SCT1 Type: 03,     Lvl: 01, Sty: 01		Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
ND2 State: Logconn	FIN: Sensor Wire conn. code: Screen order: 1 Spec. conn.: 100 Electrical potential: Contact order: 0 NA code: 01 Screens: Type: 03, Lvl: 01, Sty: 01	FIN: Sensor Wire conn. code: Screen order: 1 Electrical potential: Contact order: 0 NA code: 01 Screens: - SCT1 Type: 03, Lvl: 01, Sty: 01		Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)





# Wiring

## Loom list

Table of contents		Page
References		
List of tables		
1 References		
	References	
	Table 1 References	
Data module / Technical publication	Title	
None		

# Wiring data

Ident	Information	Routing	RPC	Applicability
Batt_01 Context: PN-AC-12561 MFG: F0001 Origin: Manufacturer	Battery_123 Harn. var.: 123 Harn. iss.: A Harn. name: Battery harness EMC: LS1 Max temp.: 500 degF High vibr. env.: Yes Hydr. env.: Yes Sleeves: - PN: SPN1234 Material: Teflon		CAGE: U8025 Name: UK MoD	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Tacho	Tachometer_101 Harn. var.: 101 Harn. iss.: A Harn. name: Tachometer harness EMC: LS2 Min temp.: -10 degC Max temp.: 60 degC High vibr. env.: Yes Sleeves:		CAGE: U8025 Name: UK MoD	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)



	(0	Continued)		
Ident	Information	Routing	RPC	Applicability
	- Material: Silicon			
Lamp1	Front light_501 Harn. var.: 501 Harn. iss.: A Harn. name: Front light harness EMC: LS3 Min temp.: -10 degC Sleeves: - PN: SPN1234 - PN: SPN4321		CAGE: U8025 Name: UK MoD	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)
Lamp2	Rear light_503 Harn. var.: 503 Harn. iss.: A Harn. name: Rear light harness EMC: LS3 Hydr. env.: Yes		CAGE: U8025 Name: UK MoD	Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)



# Lights

## Manual test

Table o	of contents	Page
	Manual test	1 1 2
List of	tables	
	1 References	122
	References	
	Table 1 References	
Data mod	dule / Technical publication Title	
None		

# Preliminary requirements

# **Required conditions**

#### Table 2 Required conditions

Action / Condition	Data module / Technical publication
None	

# **Required persons**

## Table 3 Required persons

Persons	Category	Skill level	Trade/Trade code	Estimated time
Man A	Basic user		Operator	0,25 h

Produced by Docuneering Ltd

S1000DLIGHTING-AAA-D00-00-00-00AA-341A-A



## **Support equipment**

#### Table 4 Support equipment

Name	Manufacturer / Part No.	Quantity	Remark
None			

## Consumables, materials and expendables

#### Table 5 Consumables, materials and expendables

Name	Manufacturer / Part No.	Quantity	Remark
None			

## **Spares**

#### Table 6 Spares

Name	Manufacturer / Part No.	Quantity	Remark
None			

## Safety conditions

None

## **Procedure**

- 1 Set the lights to on.
- 2 Make sure that all the lights operate correctly.

# Requirements after job completion

# **Required conditions**

#### Table 7 Required conditions

Action / Condition	Data module / Technical publication
None	



## Lights

## Observed fault

## **Fault codes**

Fault code	Fault description
NYCJD02	The lights are set to the dim position.

# Table of contents Observed fault References 1 Fault reporting 1

## List of tables

#### References

#### Table 1 References

Data module / Technical publication	Title
S1000DLIGHTING-AAA-D00-00-00-00AA-341A-A	Lights – Manual test
S1000DLIGHTING-AAA-D00-00-00-00AA-921A-A	Lighting – Remove and install a new item

# Fault reporting

#### Fault code

NYCJD02

# Fault description

The lights are set to the dim position.

# 1 During use or maintenance

## 1.1 Fault isolation test – LRU



Line replaceable unit

 Nomenclature
 Identification

 Bulb
 MFR: KZ111/PN: LiRUs-L1-11

Fault isolation test performance

Test type: Operation
Test code: O-001

**Test description** 

Name:..... Test the bulbs

**Test parameters** 

from 1 to 1 Days

Test procedures: S1000DLIGHTING-AAA-D00-00-00-00AA-341A-A

Repair procedures: S1000DLIGHTING-AAA-D00-00-00-00AA-921A-A

## Remarks

This is the data module you would visit when you notice that the lights do not operate correctly.



## Lighting

## Assemble, install and connect procedures

Table o	f contents Page
	Assemble, install and connect procedures  References  Preliminary requirements  Procedure  Requirements after job completion
List of t	tables
; •	1 References 2 Required conditions 3 Support equipment 4 Consumables, materials and expendables 5 Spares 6 Required conditions  References  References
	Table 1 References
Data mod	lule / Technical publication Title
S1000DLI	GHTING-AAA-D00-00-00AA-941A-D
S1000DLI	GHTING-AAA-D00-00-00-00AA-921A-A Lighting – Remove and install a new item

# Preliminary requirements

# **Required conditions**

#### Table 2 Required conditions

Action / Condition	Data module / Technical publication	
Bike is stationary		

# **Support equipment**

Produced by Docuneering Ltd

#### Table 3 Support equipment

Name	Manufacturer / Part No.	Quantity	Remark
Specialist toolset	MFR: KZ666 /PN: BSK-TLST-001	1 EA	

Applicable to: Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)

S1000DLIGHTING-AAA-D00-00-00-00AA-700A-A



## Consumables, materials and expendables

Table 4 Consumables, materials and expendables

Name	Manufacturer / Part No.	Quantity	Remark
None			

## **Spares**

#### Table 5 Spares

Name	Manufacturer / Part No.	Quantity	Remark
None			

## **Safety conditions**

None

#### Procedure

	Fiocedure
1	Remove the lighting system from the packaging.
2	Make sure that the components in the package are the same as those on the \$1000DLIGHTING-AAA-D00-00-00-00AA-941A-D.
3	Install the light bulb to the front and rear lights (refer to \$1000DLIGHTING-AAA-D00-00-00-00AA-921A-A).
4	Attach the front light fitting on the top of the handlebar.
4.1	Apply the protective strip around the handlebar.
4.2	Pull the clamp open and put it around the protective strip with the light connector at the top.
4.3	Install the washer on the screw.
4.4	Use the correct screwdriver from the Specialist toolset and tighten the screw into the hole at the bottom of the clamp. This safeties the clamp to the handlebar.
5	Attach the rear light fitting to the rear triangle of the bike frame.
5.1	Apply the protective strip around one of the two rear triangle up-tubes.
5.2	Pull the clamp open and put it around the protective strip. Make sure the light connector points rearwards.

5.3

5.4

6

Install the washer on the screw.

bottom of the clamp. This safeties the clamp to the tube.

Attach the light with the white glass to the front connector.

Use the correct screwdriver from the Specialist toolset and tighten the screw into the hole at the



7 Attach the light with the red glass to the rear connector.

# Requirements after job completion

# **Required conditions**

#### Table 6 Required conditions

Action / Condition	Data module / Technical publication
None	





# Lighting

## Remove and install a new item

Table	of co	ntents	Page
List o	Refer Prelin Proce Requ	ences	
	1 2 3 4 5 6	References Required conditions Support equipment Consumables, materials and expendables Spares Required conditions	
		References	
		Table 1 References	
Data m	odule /	Technical publication Title	
None			

## Preliminary requirements

# **Required conditions**

#### Table 2 Required conditions

Action / Condition	Data module / Technical publication
Light set to off	
Light removed from bicycle	

# **Support equipment**

Produced by Docuneering Ltd

## Table 3 Support equipment

Name	Manufacturer / Part No.	Quantity	Remark
None			

**UNCLASSIFIED** 

Applicable to: Mountain bicycle and (Mountain storm Mk1 or

S1000DLIGHTING-AAA-D00-00-00-00AA-921A-A



## Consumables, materials and expendables

#### Table 4 Consumables, materials and expendables

Name	Manufacturer / Part No.	Quantity	Remark
None			

## **Spares**

#### Table 5 Spares

Name	Manufacturer / Part No.	Quantity	Remark
Bulb	D00000000A010 00A	1 EA	

## **Safety conditions**

#### **WARNING**

Make sure that the Bulb is cool before you replace it.

## **CAUTION**

Do not touch the glass of the Bulb.

#### **Procedure**

- 1 Remove the glass.
- 2 Remove the used Bulb.
- 3 Discard the used Bulb.
- 4 Remove the new Bulb from the packaging.
- 5 Install the new Bulb.
- 6 Install the glass on the light.

# Requirements after job completion

# **Required conditions**

#### Table 6 Required conditions

Action / Condition	Data module / Technical publication
Attach the light to the bicycle if necessary.	

Applicable to: Mountain bicycle and (Mountain storm Mk1 or Brook trekker Mk9)

S1000DLIGHTING-AAA-D00-00-00-00AA-921A-A






# Light system

## Illustrated Parts Data - IPD

Table of contents		Page
Illustrated Parts Data - IPD References		1 1
List of tables		
1 References		1
List of figures		
1 Light system		1
	References	
	Table 1 References	
Data module / Technical publication	Title	

None

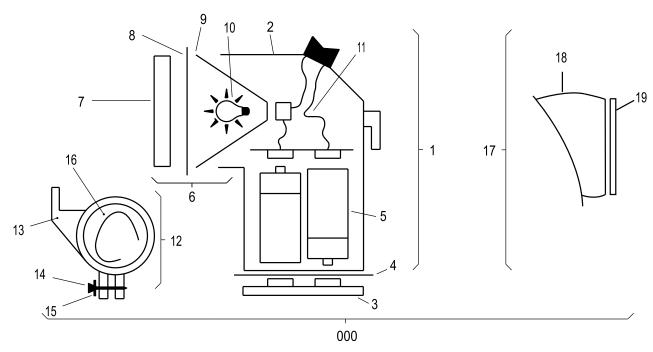

ICN-S1000DBIKE-AAA-D000000-0-U8025-00537-A-04-1 Fig 1 Light system



# Initial provisioning project information

 IPP number:
 KZ7771111

 IPP subject:
 LIGHT SYSTEM

 IPP file identifier:
 s

Fig	Item	Units per assembly / Unit of issue	NCAGE	Part No. NATO Stock No.	Description	* Usable on code assy • MV/Effect	ICY
0/0							
	0	REF EA	KZ777	LRU1001	Light system		
	1	1 EA	KZ777	LRU1010	• Light, sub-assembly front		
	2	1 EA	KZ777	LRU1011	• • Light, main body		
	3	1 EA	KZ777	LRU1012	• • • Light, base		
	4	1 EA	KZ777	LRU1013	•••• Seal		
	5	2 BX	KZ777	LIRUS-L1-10	• • • Battery		
	6	1 EA	KZ777	LRU1018	• • Lens, assembly		
	7	1 EA	KZ777	LRU1019	• • • Lens sub-assembly		
	8	1 EA	KZ777	LRU1022	•••• Seal		
	9	1 EA	KZ777	LRU1020	• • • Reflector		
	10	2 EA	KZ777	LIRUS-L1-11	•••• Bulb		
	11	1 EA	KZ777	LRU1026	• • Loom wiring		
	12	1 EA	KZ777	LRU-B001	<ul> <li>Bracket, light mounting</li> </ul>		
	13	1 EA	KZ777	LRU-B003	• • Clip		
	14	1 BX	KZ777	LRU-B124	• • Screw,special		
	15	1 BX	KZ777	LRU-B556	• • Washer,flat		
	16	1 EA	KZ777	LRU-B789	• • • Grip,strip		
	17	1	KZ777	LRU2010	• Light, sub assembly rear		
	18	1 EA	KZ777	LRU1011	• • Light, main body		
	19	1	KZ777	LRU2018	•• Lens, assembly rear		